


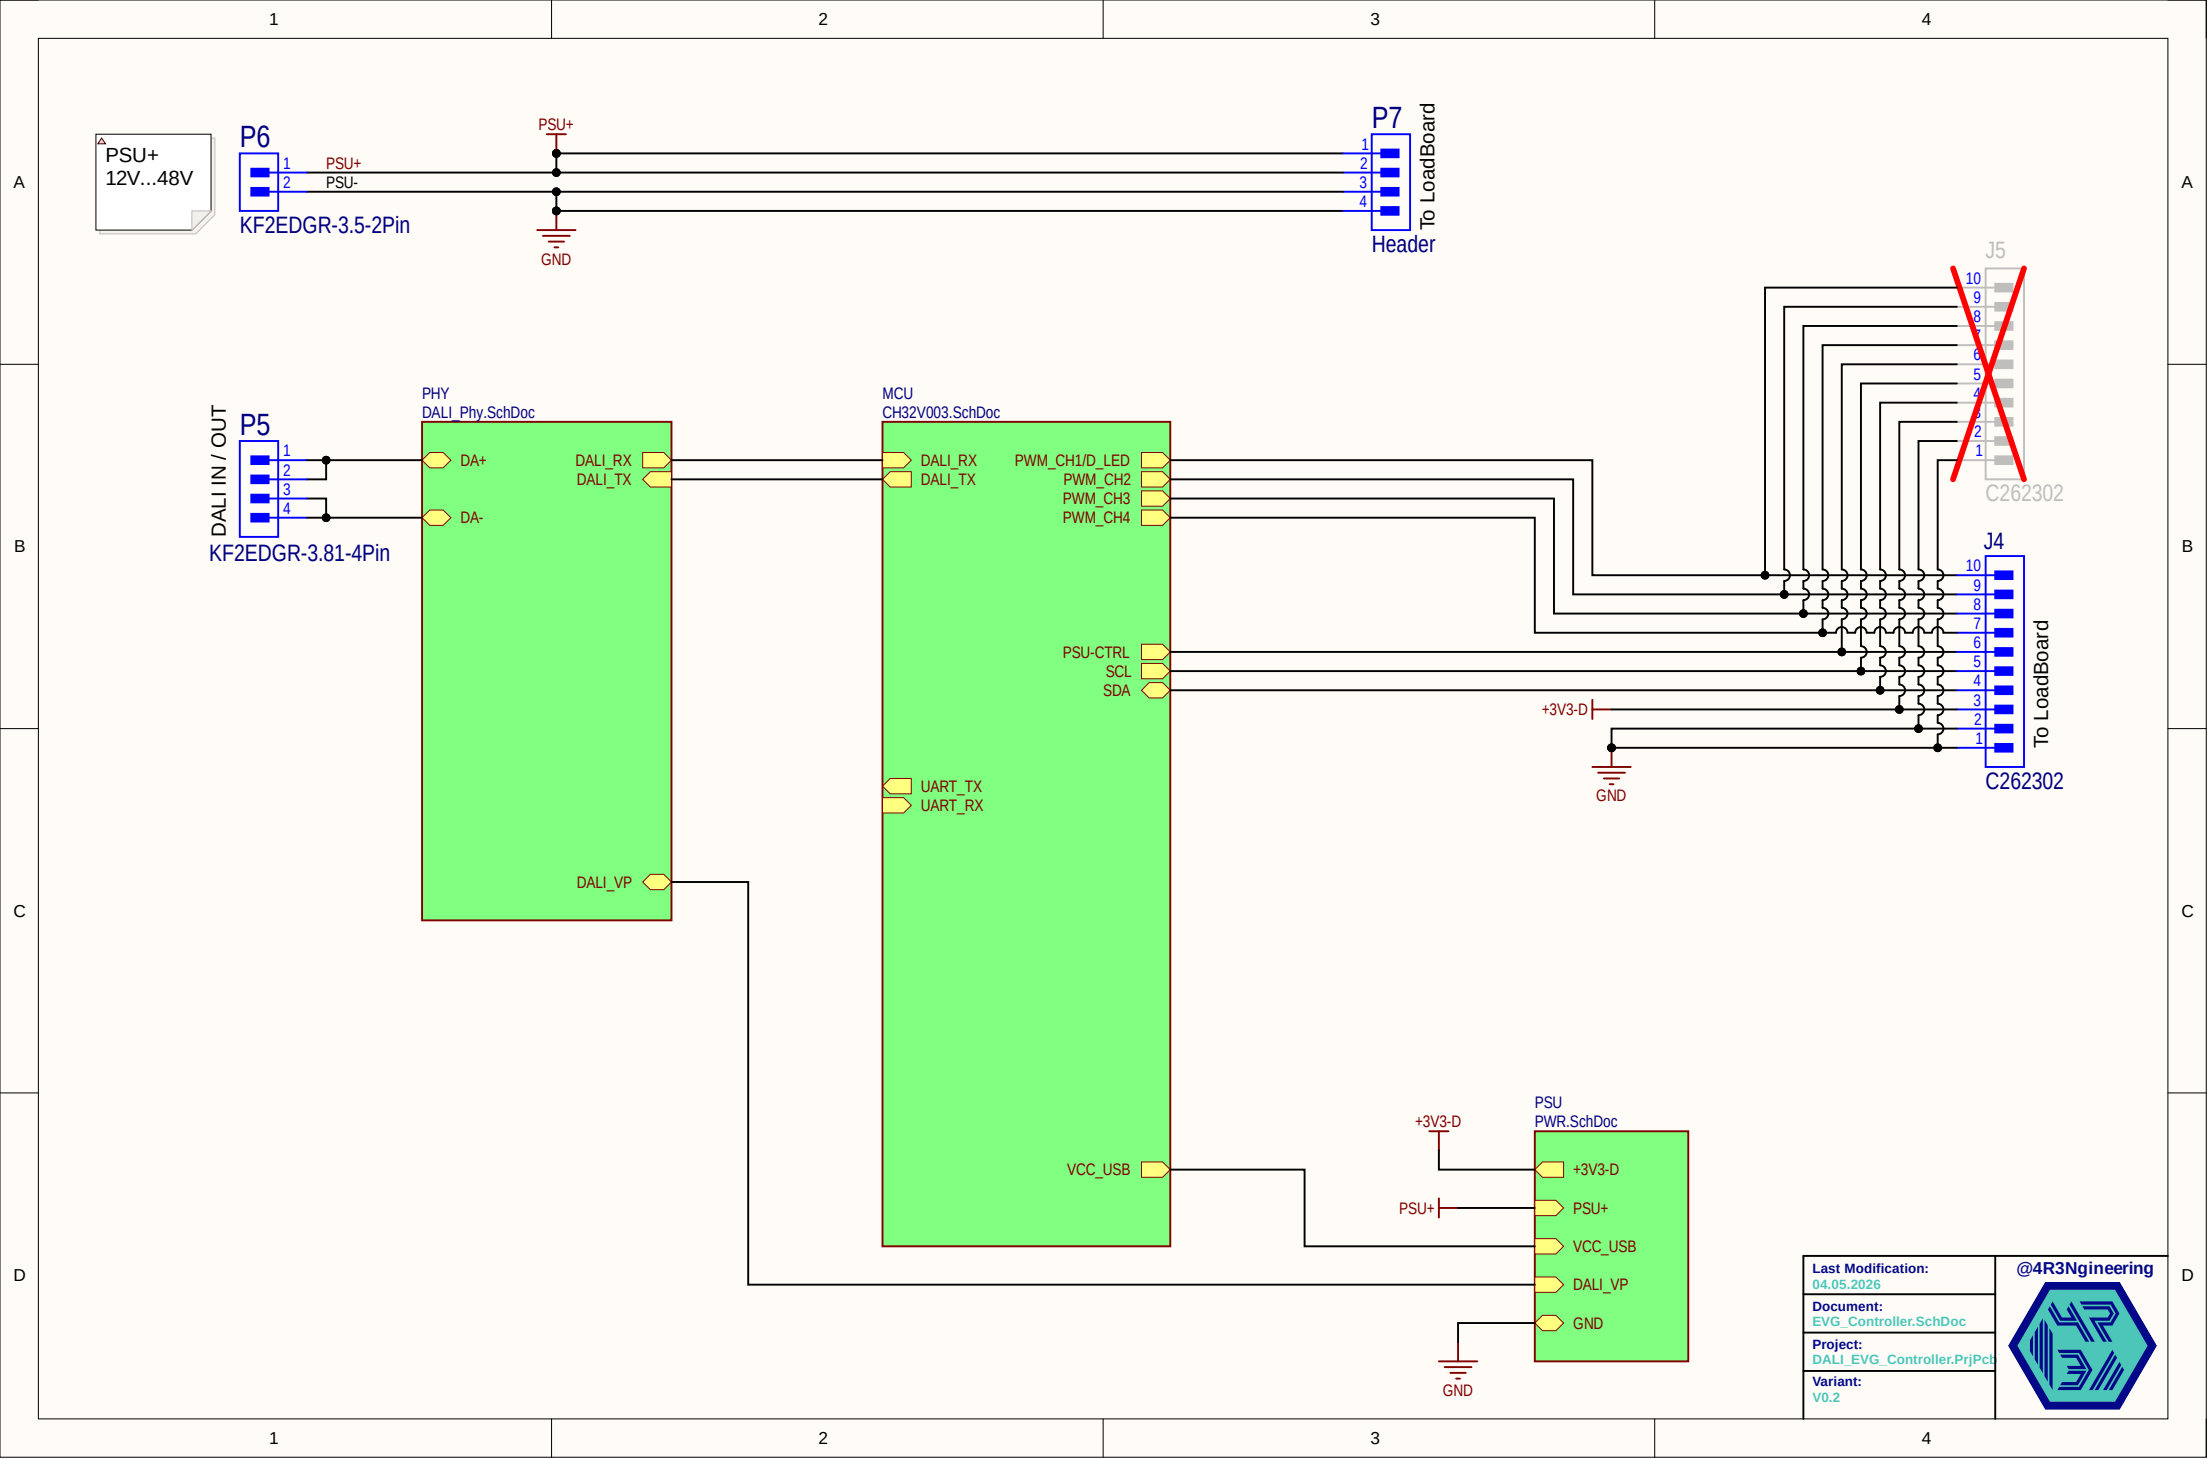







```
USB HID Bootloader from CNLohr Compiled with:
<bootloader.c>
#define DISABLE_BOOTLOAD


#define BOOTLOADER_BTN_PORT D
#define BOOTLOADER_BTN_PIN 0
#define BOOTLOADER_BTN_TRIG_LEVEL 0

#define BOOTLOADER_TIMEOUT_PWR 0


<usb_config.h>
#define USB_PORT D
#define USB_PIN_DP 4
#define USB_PIN_DM 3

#define USB_PIN_DPU 0
```

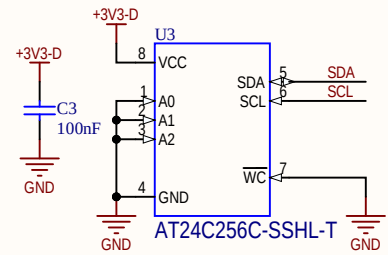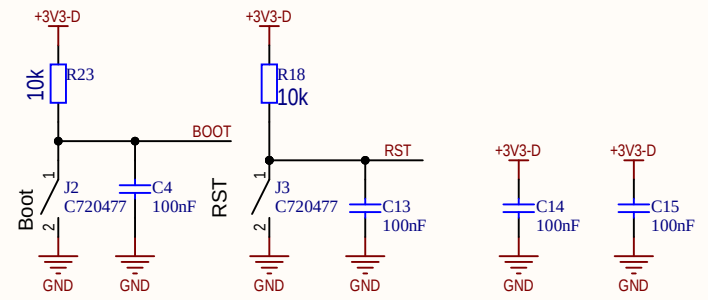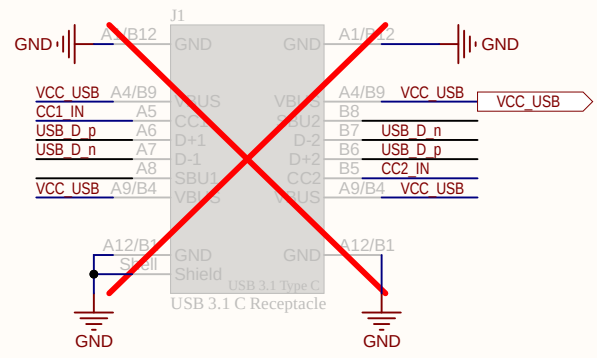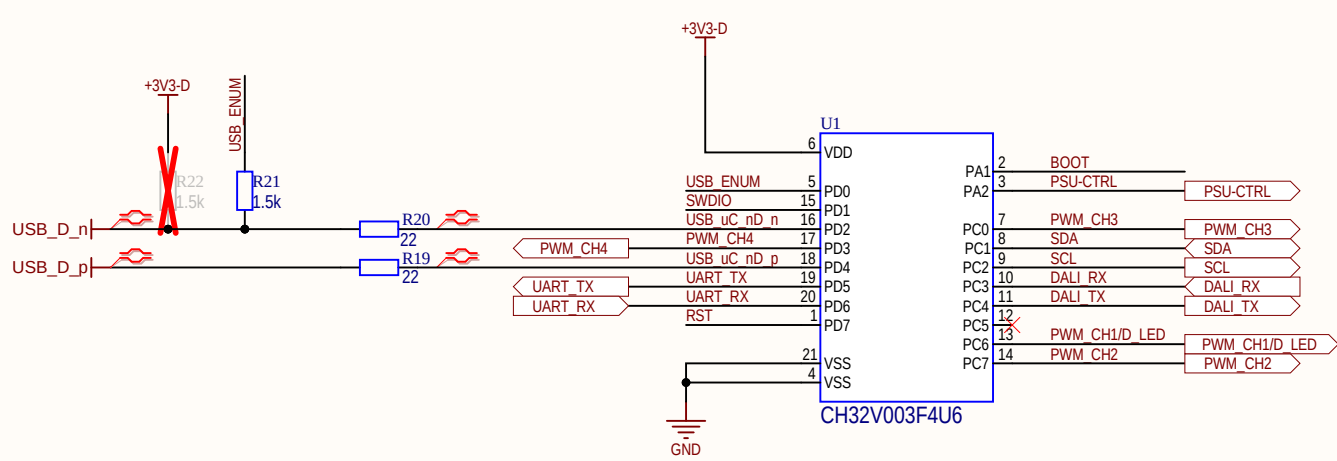

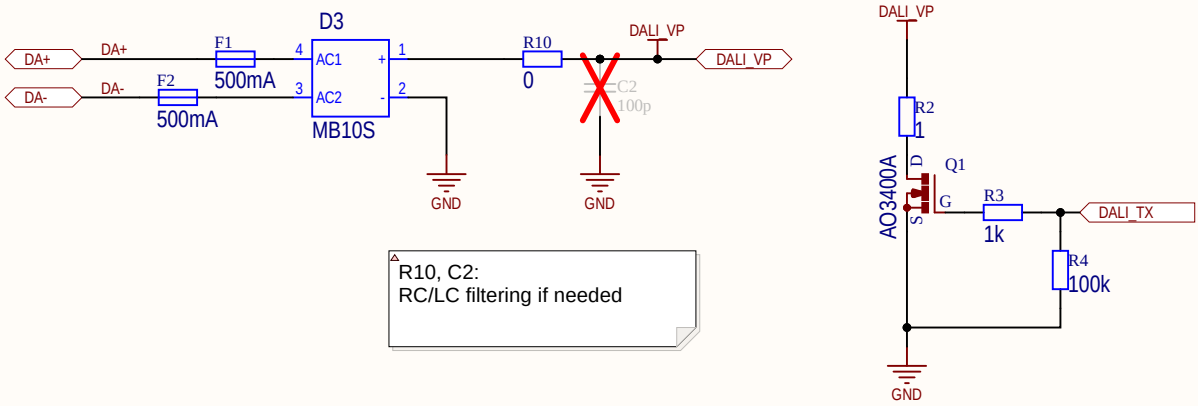

DALI Sender

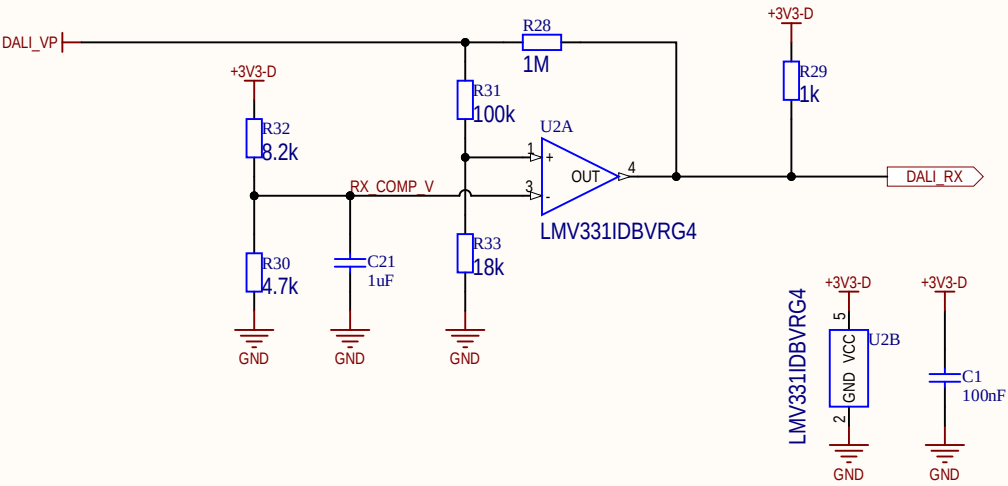

DALI Receiver

Last Modification:	04.05.2026
Document:	DALI_Phy.SchDoc
Project:	DALI_EVG_Controller.PrjPcb
Variant:	V0.2




△ Active Bus Disconnect:
When PSU+ is Powered, Q4 will conduct, puling base from Q3 low. Q3 conduct, shunting Gate-Q2 to Source-Q2.

This ensures that the whole system is powered by it's own PSU once the EVG wakes up, EVEN if PSU+ is lesser than DALI_VP.

D1 ensures gate voltage does not exceed 18V, D2 ensures in case of DALI-Voltage >18V no additional load current is flowing via DALI_VP.

△ System is designed to stay under 2mA standby current (can be measured via R27)

R27 doubles as inrush limiter

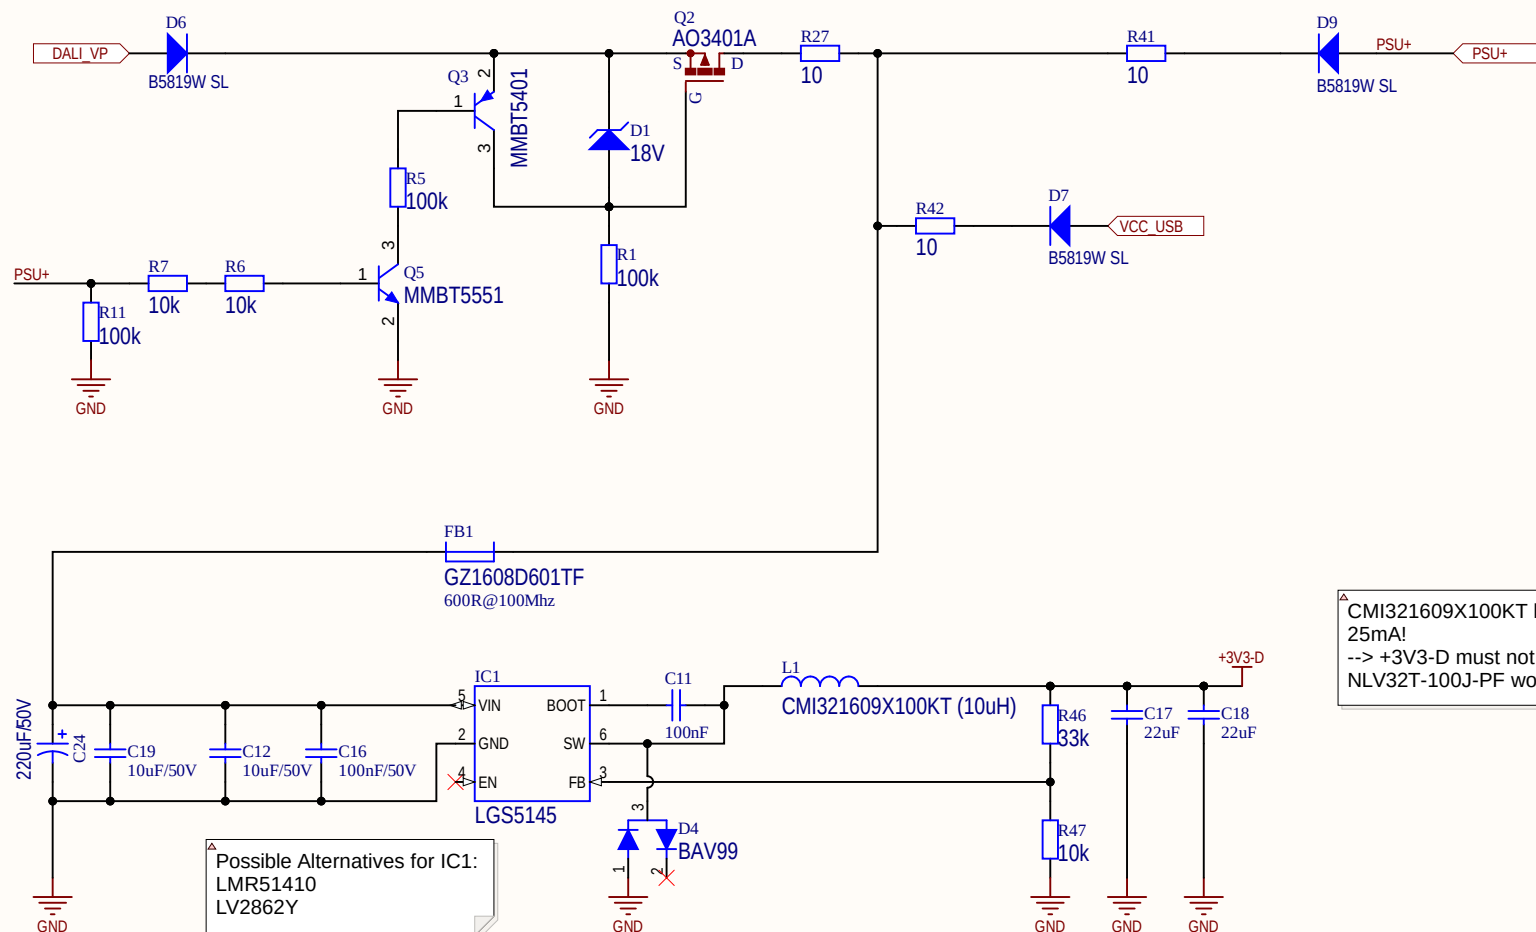

△ CMI321609X100KT has a maximum current rating of 25mA!
--> +3V3-D must not be loaded more than 25mA
NLV32T-100J-PF would be 150mA

△ Possible Alternatives for IC1:
LMR51410
LV2862Y

Last Modification:	@4R3ngineering
04.05.2026	
Document:	
PWR.SchDoc	
Project:	
DALI_EVG_Controller.PrjPcb	
Variant:	
V0.2	

