
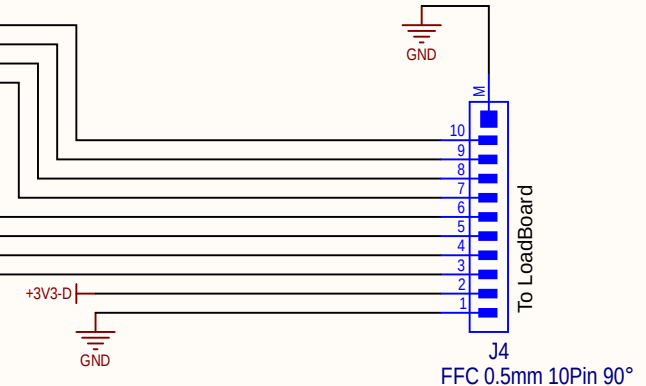

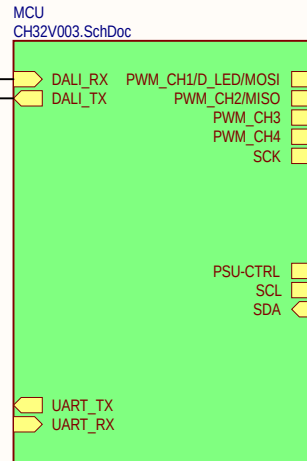


P6
KF2EDGR-3.5-2Pin






P7
To LoadBoard
Header

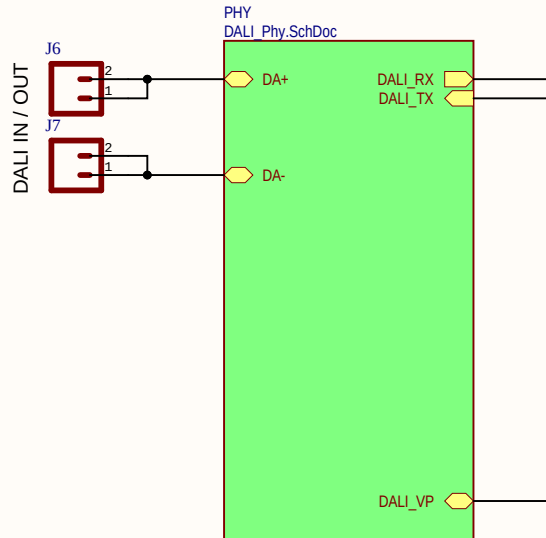

Attention!
Load board MUST Isolate the PWM signals! Otherwise there are some strange things happening

Quad-Channel:
 π 140(M/E)3x/ISO7040
Triple-Channel: π 130(M/E)3x
Dual-Channel: π 120(M/E)3x
Single-Channel: π 110(M/E)3x



--> Mit PSU I/O immer +1 kanal:
 π 160M30

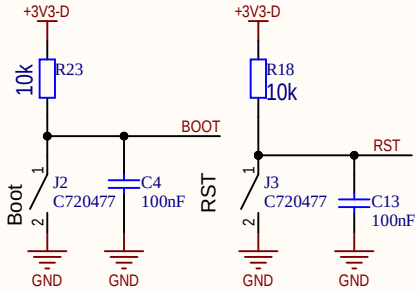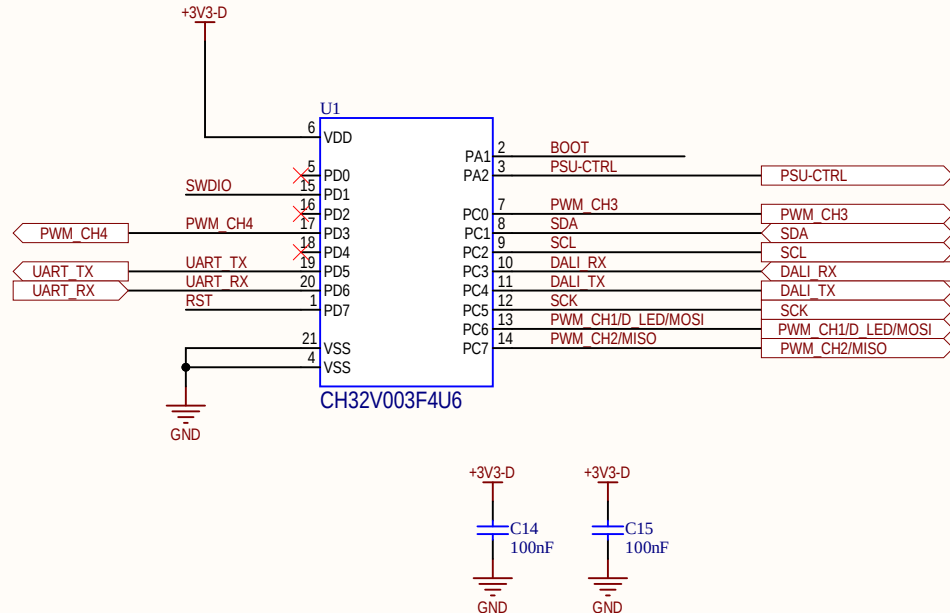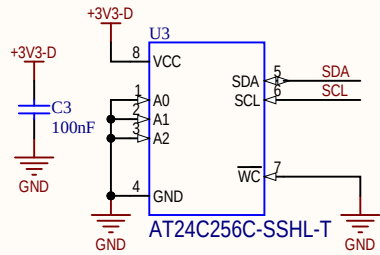


Last Modification:	@4R3Ngineering
08.07.2026	
Document:	
CH32V003.SchDoc	
Project:	
DALI_EVG_Controller.PrjPcb	
Variant:	
V0.3	

C7...C10
Bypass-Caps für GND-LF

FB2/FB3/C2:
HF-Noise Filtering

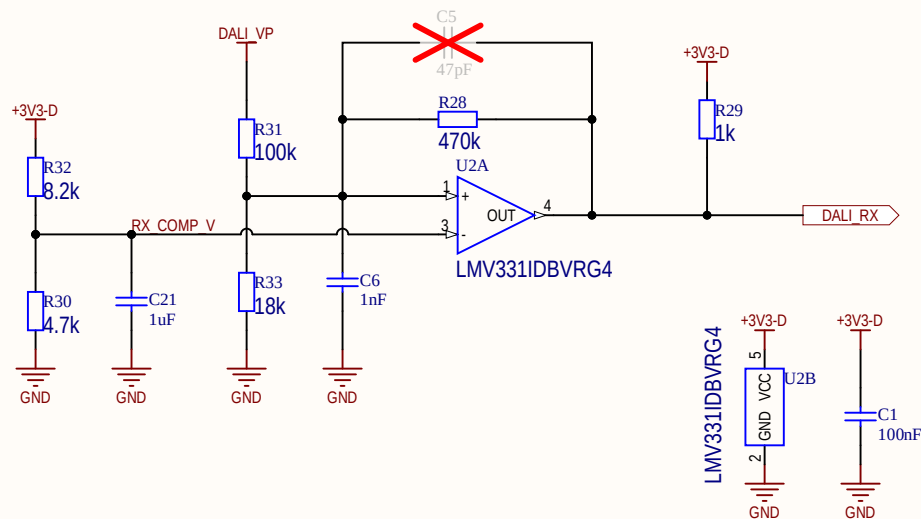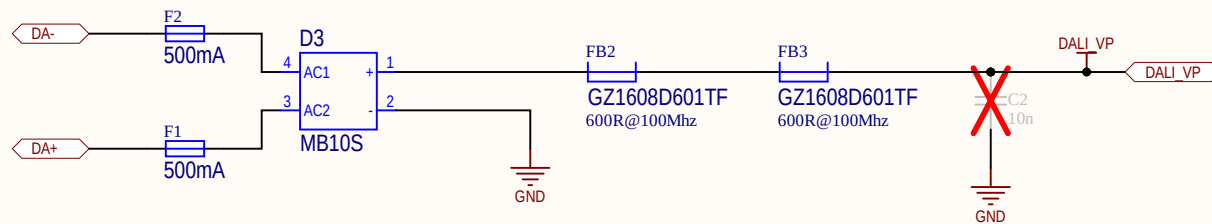


DALI Receiver

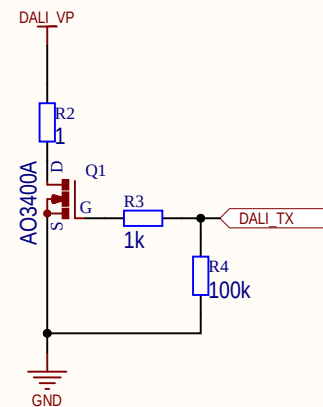

DALI Sender

Last Modification: 08.07.2026	
Document: DALI_Phy.SchDoc	
Project: DALI_EVG_Controller.PrjPcb	
Variant: V0.3	

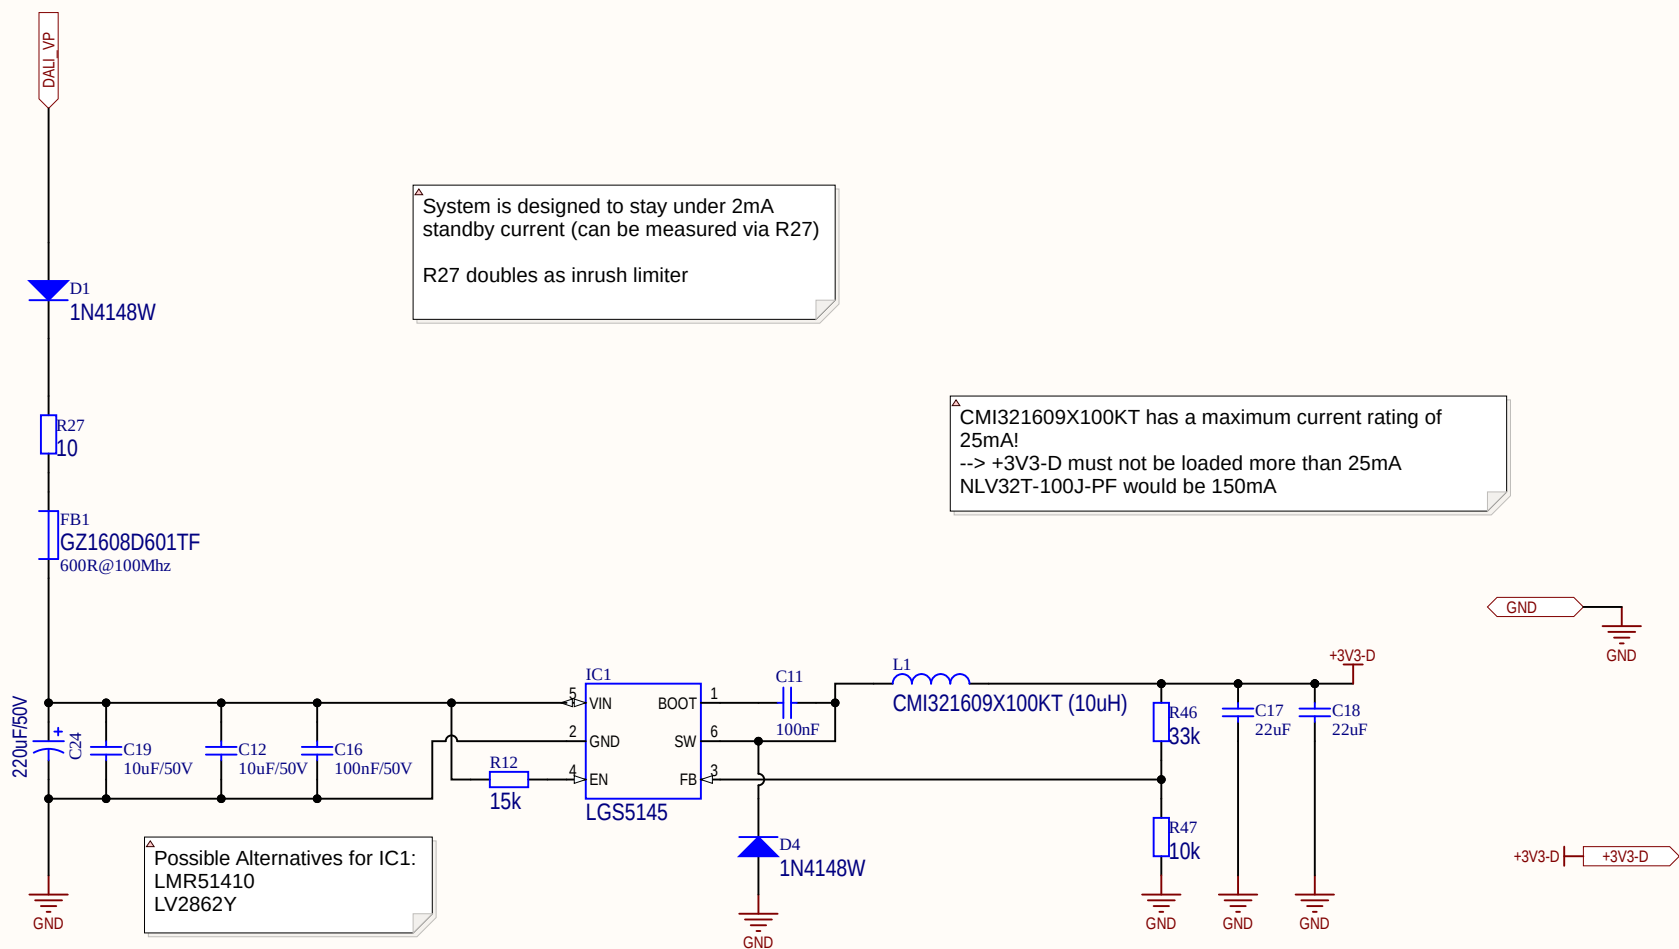

System is designed to stay under 2mA standby current (can be measured via R27)

R27 doubles as inrush limiter

CMI321609X100KT has a maximum current rating of 25mA!
--> +3V3-D must not be loaded more than 25mA
NLV32T-100J-PF would be 150mA

Possible Alternatives for IC1:
LMR51410
LV2862Y

Last Modification:	08.07.2026
Document:	PWR.SchDoc
Project:	DALI_EVG_Controller.PrjPcb
Variant:	V0.3

@4R3Ngineering