


ComfortFloor (elastic PU)

Total build-up: **~47.85 mm** · NTS — nominal thicknesses, verify substrate & system on site

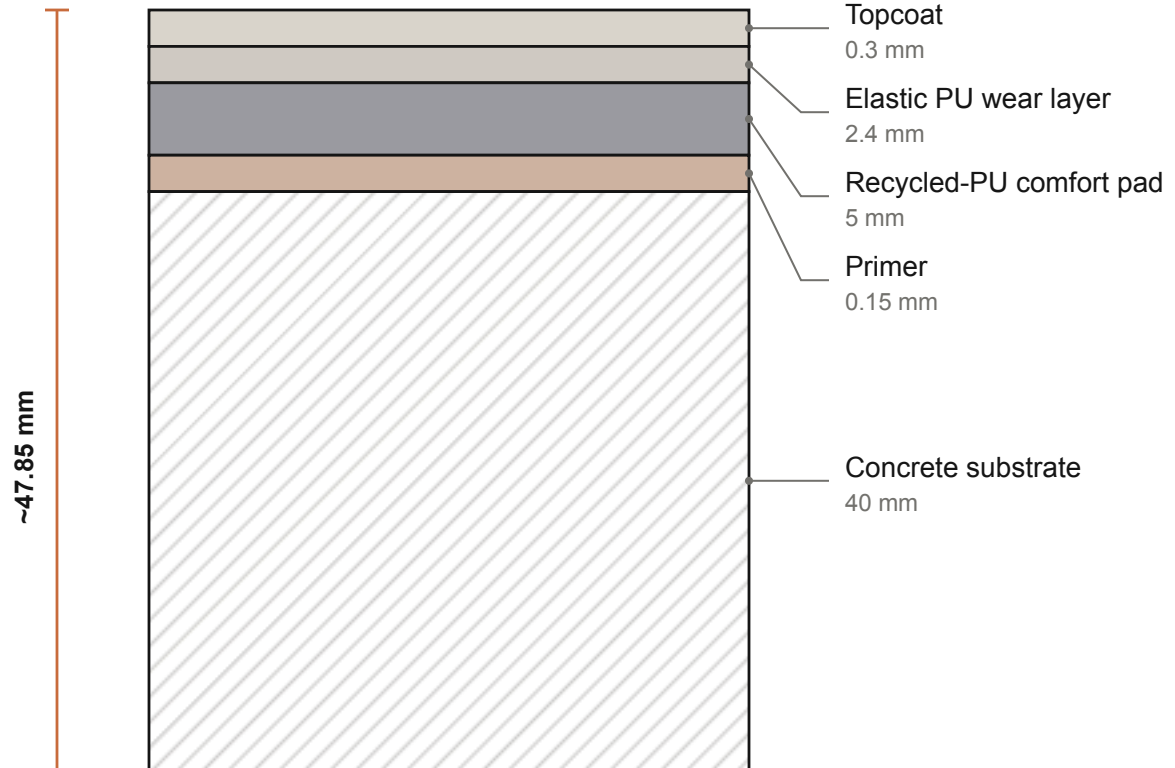

STANDARDS / REFERENCES

EN 13813 · EN ISO 10140 (acoustic) · ASTM F2170