

Foam Clamp


Model LC-N



EXCELLENT VISIBILITY

REDUCED WEIGHT, EFFECTIVE THICKNESS AND CENTRE OF GRAVITY.

Range: 1.400 - 3.200 Kg

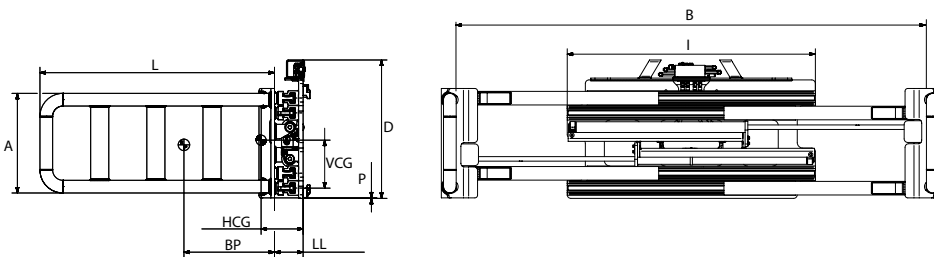

- Aluminium profile frame.
- Reduced weight, effective thickness and centre of gravity.
- Excellent visibility.
- Used to handle large and light blocks of rubber or polystyrene.
- Light tubular profile arms, to guarantee a good support and avoid damage to loads.

Model	Capacity	Load Centre	Frame Width	Opening Range	Arm Dimensions	Effective Thickness	Weight	Horizontal Center of Gravity	Vertical Center of Gravity	Ground Clearance	Mounting class
	Q kg	BP mm	I mm	B mm	L x A x E mm	LL mm	M kg	HCG mm	VCG mm		ISO 2328
LC 14 N8A 87-260	1.400	500	1.370	870-2.600	1.500x550x70	136	436	272	257	4	2 A
LC 18 N6A 87-260	1.800	500	1.370	870-2.600	1.300x550x70	158	539	232	265	3	3 A
LC 32 N6A 64-210	3.200	500	1.250	640-2.100	1.300x800x88	204	900	344	345	-	3 A

Notes:

- Two hydraulic function required.
- Check valve with power regeneration hydraulic circuit.
- Pressure relief valve.

Options:

- Special openings.
- Quick change lower hooks.
- Pressure gauge.
- Load backrest.
- Custom built arm dimensions.