



Rotating Multipurpose Clamps

Model LGC-U



SLIM ARMS FOR EASY KNIFING

360 DEGREE CONTINUOUS ROTATION

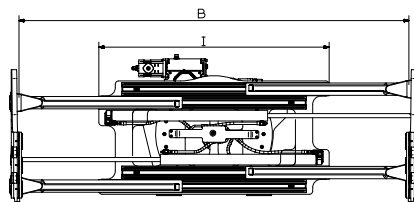

Range: 1.400 - 2.800 Kg.

- Rotating multipurpose clamp can safely transport various bales of cellulose pulp, cotton, wool and paper etc. between the thin profile load arms
- 360 degree continuous rotation in both directions
- Slim arms for easy knifing between bale stacks
- Reduced weight , effective thickness and centre of gravity
- Excellent visibility

Model	Code	Capacity	Load center	Opening Range in to in	Arm Dimensions	Frame Width	Weight	Horizontal Center of Gravity	Vertical Center of Gravity	Effective Thickness	Arms Toe-in	Mounting Class
		<i>Q</i> kg	<i>BP</i> mm	<i>B min</i> mm	<i>L x A x E x T</i> mm	<i>I</i> mm	<i>W</i> kg	<i>HCG</i> mm	<i>VCG</i> mm	<i>LL</i> mm	<i>C</i> mm	<i>ISO 2328</i>
LGC 14 U4A	55-178	1.400	500	550-1.780	1.000 400 25 58	940	503	279	247	236	28	II
LGC 28 U6B	64-237	2.800	500	640-2.370	1.200 400 30 79	1.400	808	297	292	266	21	III

Notes:

- Two hydraulic functions.
- Capacity during rotation depends on the clamping pressure and on the load
- Pressure relief valve.
- Rotating centre.
- Double check valve.
- Arms welded directly to the guides.

Options:

- Special openings.
- Quick change lower hooks.
- Pressure gauge.
- Load backrest.
- Arms of various dimensions.

BOLZONI INDIA

C/O-ALLIANCE IMPEX, DSV SOLUTIONS PVT LTD - CHAKAN INDUSTRIAL AREA PHASE II, KHALUMBRE VILLAGE,
TAL KHED DIST. - PUNE 410501, INDIA
TEL. +91 703 009 6599

www.bolzonigroup.com - pkothawade@bolzonigroup.com

BOLZONI

G R O U P