

# Brick & Block Clamps with Oscillating Pads

Models LS-A



The Bolzoni brick and block clamp with oscillating pads, Series LS-A, is used to handle bricks, concrete blocks, concrete vibro-compressed blocks (sumps, girders, etc.) without the use of pallet. This clamp is designed to compensate the load irregularities typical of the brick and block handling.


Arms are fitted with oscillating, replaceable, rubber contacts pads. Arms are equipped with an oscillation regulator with two positions plus a third fixed position, to suit different loads.

Available also with autocompensating pads, the KB-K Series has self-aligning vulkan blocks. On this brick and block clamp version the load irregularities are compensated through glycerine filled chambers.

## Features:

- Very rigid frame structure with single piece double "T" profile. Wide visibility window thanks to new vertical plates position at the extremity of the frame. Narrow vertical plates.
- Superior visibility through the frame grants safe and easy handling operations.
- New check valve for simple and precise arm synchronism, easy fitting, new position in the upper profile shadow granting valve protection and high visibility of the structure.
- New fixing system of the sliding pads to relief stress.
- New self-aligning cylinder fixing to avoid breakage.
- Versions with new separate side shift: cylinder position within the frame window to improve side shifting system. Upper and lower pads with greasers.



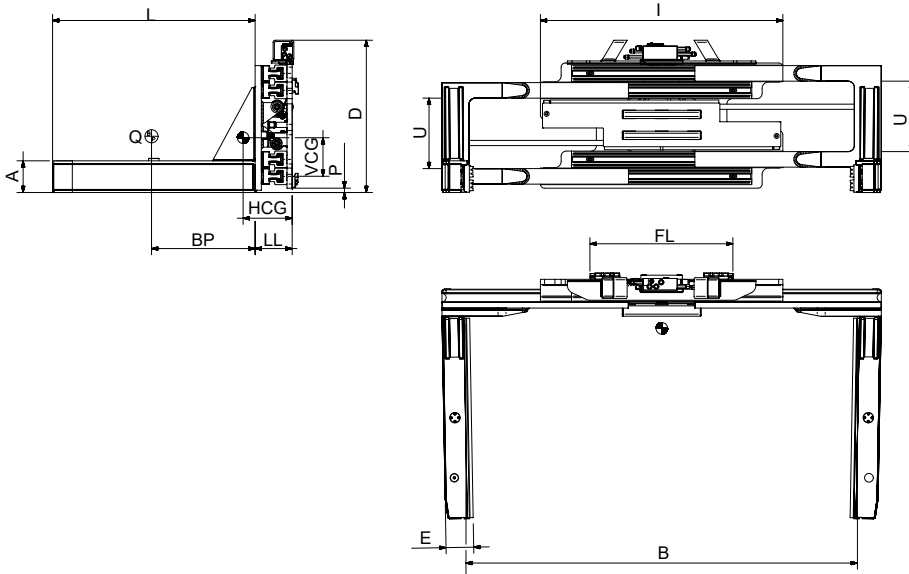

**Range:** 1400 Kg - 3500 Kg

### Plus:

- Strong double T-profile frame.
- Reduced weight, effective thickness and centre of gravity.
- Excellent visibility.
- Used in industries producing concrete blocks.
- Arms fitted with oscillating contact pads with replaceable rubber pads.
- Arms equipped with an oscillation regulator with two positions plus a third fixed position, to suit different loads

| Model     | Capacity | Load Centre | Opening Range | Arm Dimensions   | Frame Width | Minimum Carriage Width | Height  | Weight  | Horizontal Centre of Gravity | Vertical Centre of Gravity | Effective Thickness | Side Visibility | Central Visibility | Ground Clearance | Arm Toe-in | Mounting Class |
|-----------|----------|-------------|---------------|------------------|-------------|------------------------|---------|---------|------------------------------|----------------------------|---------------------|-----------------|--------------------|------------------|------------|----------------|
|           | Q<br>kg  | BP<br>mm    | B<br>mm       | LxAxE-T<br>mm    | I<br>mm     | FL<br>mm               | D<br>mm | W<br>Kg | HCG<br>mm                    | VCG<br>mm                  | LL<br>mm            | U<br>mm         | V<br>mm            | P<br>mm          | C<br>mm    | ISO<br>2328    |
| LS 22 A4A | 2.200    | 500         | 430 - 1.890   | 1000x153x134-150 | 1.170       | 690                    | 735     | 528     | 237                          | 186                        | 179                 | 340             | -                  | 21               | 20         | II A           |
| LS 28 A6B | 2.800    | 500         | 430 - 1.890   | 1200x153x134-150 | 1.170       | 720                    | 827     | 571     | 285                          | 210                        | 179                 | 432             | -                  | 21               | 24         | III A          |

### Notes:

- Two hydraulic functions required.
- E= arm thickness at half length.
- T= arm thickness at the base.
- Check valve with power regeneration hydraulic circuit.
- Pressure relief valve.
- Arms welded to the guides.

### Options:

- Special openings.
- Separate sideshift.
- Quick change lower hooks.
- Option to convert 2A in 3A mounting.
- Pressure gauge.
- Load backrest.

