

Suprathane

POLYURETHANE MALLET

FEATURES



SAFE

Protects workmen from injuries due to its superior design steel structure fully covered by Polyurethane.



SILENT

Low noise level makes for a more conducive work environment.



NON-REBOUND

Special mallet head design for greater impact without rebound.



SCRATCH-PROOF

Dent-free and scratch-free working protects work piece.



SPARK FREEDOM


No spark due to Polyurethane covering.



COST-EFFECTIVE

Longer life span and hence cost-effective.

Model	A Dia mm	B Width mm	C Handle mm	D Length mm	Weight g
SM-0	25	76	232	257	250
SM-1	37	76	233	270	400
SM-2	50	103	285	335	800

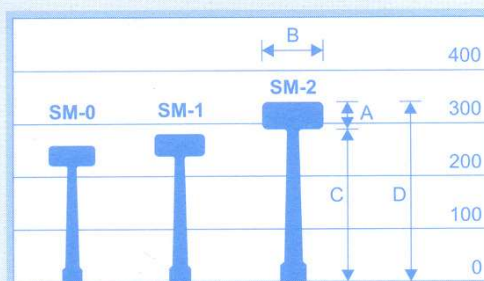

Die and Mould Making

Automobile Industry


Electronic Industry

Aluminium Frame Industry

Aircraft Industry

Various Assembly Lines

APPLICATIONS

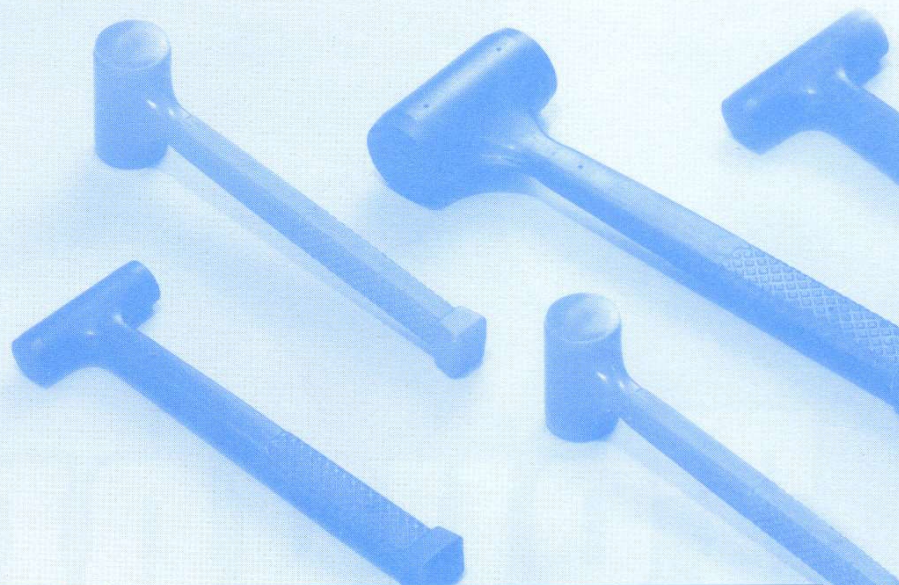

Represented by :

PVT. LTD.
Speciality Urethanes

Head Office : N-19, Additional MIDC, Satara - 415 004. (India).
Tel : (91) 2162 - 246054, 245078, 245342 Fax : (91) 2162 - 246202

Regd. & Branch Office : 324, Shaniwar Peth, Pune - 411 030. (India).
Tel : (91) 20 - 2445 3482 Fax : (91) 20 - 2448 0152

E-mail : info@suprathane.com

www.suprathane.com



The above information is based on our knowledge and information. We decline all responsibilities regarding consequences of applications. We reserve the right to change specifications without notice.