


Design Basis:

Drain Type: Covered Reinforced Concrete
U-Drain
Internal Width = 600 mm
Internal Depth = 600 mm
Total Length = 500 m
Precast Unit Length = 1500 mm
Design Code = BS 8110
Concrete Grade = C40 recommended
Reinforcement Grade = High Yield Steel fy =
460 N/mm²
Concrete Cover = 40 mm


Cross-Section Details

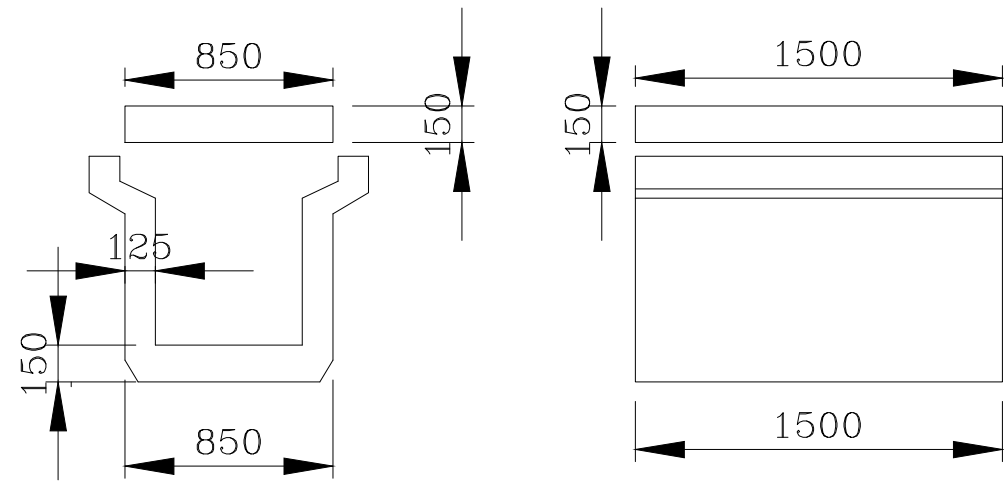


Quantities for 500 m

Number of Units:
 $500 / 1.5 = 333.3$
Provide 334 Units
Cover Slabs: 334 Nos

Reinforcement Details

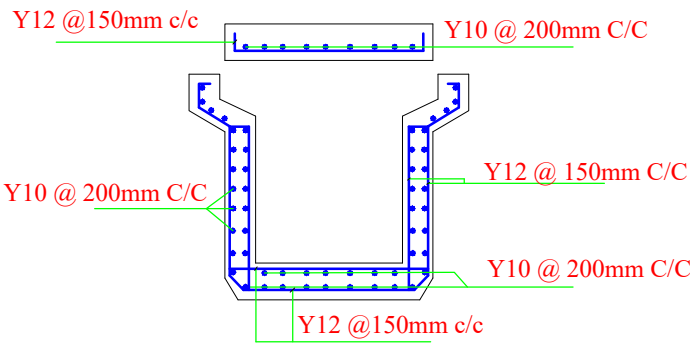


Installation Detail

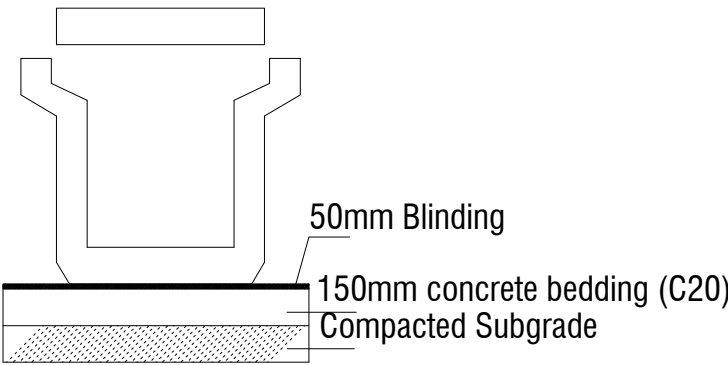

Joint Detail

Every 1.5m Unit A || 10 mm Joint || Unit B
Backer Rod+ Polyurethane Sealant

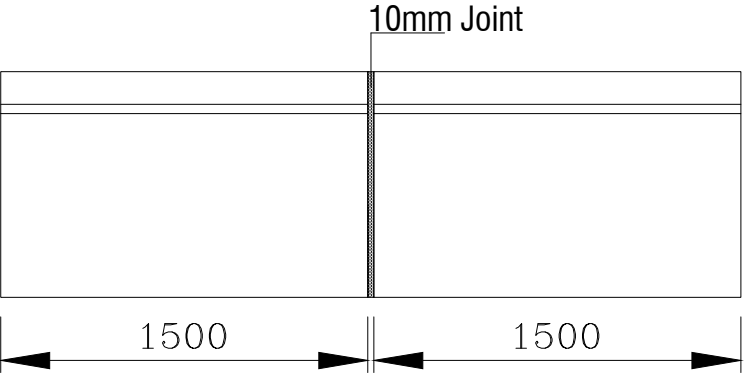

Notes

1. Only figured dimensions are to be taken
2. This drawing should be read in conjunction with all other architect's drawings
3. Concrete to be in grade 40 and attained a compressive strength of 40 N/mm2 at 28 days
Maximum aggregate size to be 19mm

architects:

:
Federal Ministry Of Works and Housing

ProjectTitle:

Plot J56(A-C), 310 close, Banana Island
Foreshore Estate, Federal Ministry of Works and
Housing off Onikoyi Road, Ikoyi. Eti-osa local
Government Area,

Drawing Title: