


Embedded format

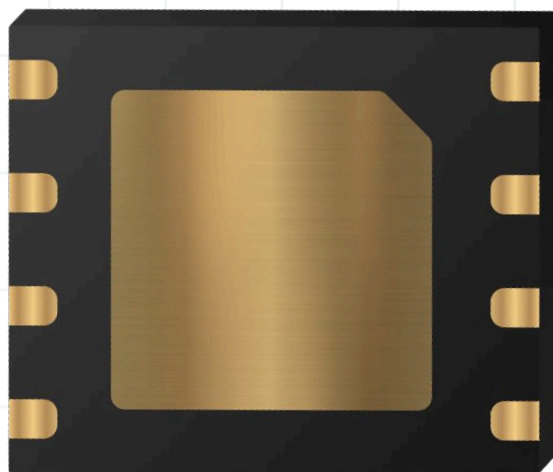

Hyper eUICC SIM

Hyper eUICC SIM – Embedded format

Product overview

A secure, device-agnostic IoT embedded SIM card for global deployments built for M2M data, with easy activation, transparent pricing, and developer-friendly tools. Hologram's Hyper SIMs use an eUICC OS to remotely update coverage over-the-air by adding or removing connectivity profiles, without requiring you to swap the SIM in your device. Network fallback functionality can dynamically switch profiles in the event that a profile loses connectivity.

Primary part number


G3-R-DFN8

Network availability


Works globally with Hologram's 2G through 5G network including LTE-M and NB-IoT where coverage is available. More information: <https://www.hologram.io/pricing/coverage>

Mechanical specifications

Bottom view

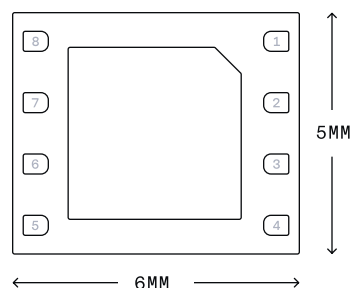


Top view

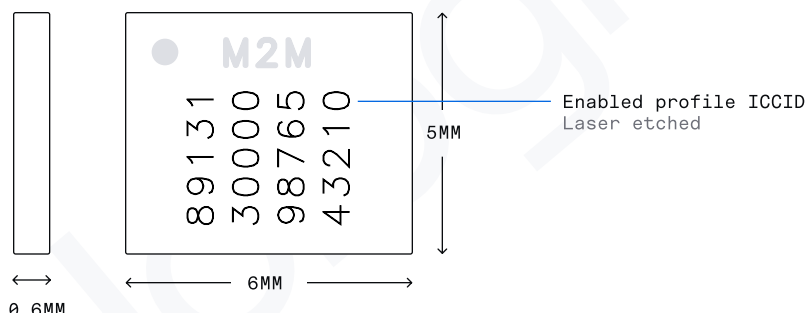

Physical characteristics

Top view

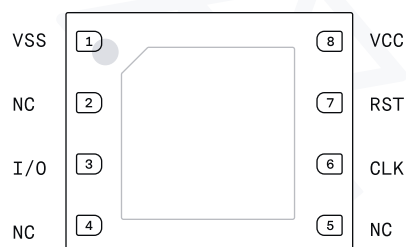

Pin definitions

1	VSS	Voltage Source Supply
2	NC	No Connect
3	I/O	Input/Output
4	NC	No Connect
5	NC	No Connect
6	CLK	Clock
7	RST	Reset
8	VCC	Input Voltage

Size

MFF2 (DFN8) Embedded SIM 6 × 5 × 0.82 mm

Compliance

Chip	 Common Criteria	EAL 4+ PP-0084 (chipset) Certificate: BSI-DSZ-CC-1126-V2-2021
OS		SGP22 RSP Technical Specification v2.5 SGP.32 eSIM IoT Technical Specifications v1.2
	 TRUSTED CONNECTIVITY ALLIANCE	eUICC Profile Package Interoperable Format Technical Specification v3.3.1
		Card Specification Version 2.3.1 Card Specification Amendments A, B, D & E
Software		Java Card 3 Platform, Classic Edition version 3.0.5
		Release 16
Remote SIM provisioning		SGP22 RSP Technical Specification v2.5 SGP.32 eSIM IoT Technical Specifications v1.2
Supplier's Declaration of Conformity	Manufactured according to the following standards: • RoHS 2015/863/EU • Reach certification • GSMA SAS-UP • ISO 9001:2015 • ISO 27001 • ISO 14001	

Hardware features

Hardware characteristics

Grade	Industrial
Operational temperature	-40°C to +105°C
Data retention	20 years @ 25°C
Write endurance	>2M cycles
Memory (NVM)	800 kB
Memory (SRAM)	20 kB

Chip type

Supplier	Infineon
Chip code	SLM17ECB800B

Hardware electrical characteristics

Operating voltage	1.62V to 5.5V
Interface standards	ISO/IEC 7816, T=0 standard for Cards with contacts – USB electrical interface and operating procedures
	ETSI 3GPP TS 102 221 v16.0.0 - Smart Cards; UICC-Terminal interface; Physical and logical characteristics

SIM features

Profiles and fallback

Available user memory	318,936 B
Maximum profiles	10
Applet version	v3 Recovery applet
Default fallback mode	Cyclical, 24 hour recovery

Part numbers

Active part numbers	Past part numbers	Multipack labeling	Part numbers
G3-R-DFN8	—	Single SIM	G3-R-DFN8
		250-pack	G3-R-DFN8-250
		2500-pack	G3-R-DFN8-2500