

ÉCOLE CENTRALE DE NANTES

UNIVERSITÀ DI GENOVA

MASTER CORO-IMARO
“CONTROL AND ROBOTICS”

MASTER ERASMUS MUNDUS
EMARO+ “EUROPEAN MASTER IN ADVANCED ROBOTICS”

2025 / 2026

Master Thesis Report

Presented by

Chiara Buono

26th August 2026

Modeling and Control of Cable-Driven UAV Systems for Collaborative Load Manipulation

Jury

Evaluators:	Marco Tognon	Associate Professor (INRIA)
	Olivier Kermorgant	Associate Professor (ECN)
Supervisor(s):	Arda Yigit	Researcher (LS2N - CNRS)
	Isabelle Fantoni	Research Director (LS2N - CNRS)
(EMARO)	Enrico Simetti	Associate Professor (UniGe)

Laboratory: Laboratoire des Sciences du Numérique de Nantes (LS2N)

Abstract

Acknowledgements

- My professors;
- All the people in the Shieldbot project
- People I left in Reggio and people I found in Genoa and Nantes

Notations

$F_0(O, x_0, y_0, z_0)$	Inertial reference world frame
$F_p(P, x_p, y_p, z_p)$	Platform reference frame at its center of mass
$F_i(A_i, x_i, y_i, z_i)$	Quadrotor reference frame at cable connection
$F_{C_i}(A_{C_i}, x_{C_i}, y_{C_i}, z_{C_i})$	Quadrotor reference frame attached to the quadrotor at its center of mass
$F_k(A_k, x_k, y_k, z_k)$	Ground vehicle reference frame

Abbreviations

ACT	Aerial Cable Towed
ACTR	Aerial Cable Towed Robot
ACTS	Aerial Cable Towed System
AW	Available Wrench set
CDPR	Cable-Driven Parallel Robot
DKM	Direct Kinematic Model
DoF	Degree of Freedom
IKC	Inverse Kinematic Controller
INDI	Incremental Nonlinear Dynamic Inversion
MPC	Model Predictive Control
NMPC	Nonlinear Model Predictive Control
OCF	Optimal Control Problem
ORCA	Optimal Reciprocal Collision Avoidance
rAW	Radius of the Available Wrench
SAW	Static Available Wrench set
SW	Static workspace
UAV	Unmanned Aerial Vehicle
UGV	Unmanned Ground Vehicle
VIC	Variable Impedance Control
WFW	Wrench Feasible Workspace

List of Figures

1.1	Robotic solutions developed by the ShieldBot project [1]	10
1.2	Solution proposed by TitanBot project [2]	11
2.1	ACTRs with land-fixed winches for firefighting applications (a) and repair of a large bridge (b) [3]	13
2.2	CDPR located at IRT Jules Verne [4, 5]	14
2.3	Kinematic scheme of the 3-DSR flying parallel robot [6]	15
3.1	Graphical representation of the platform	19
3.2	Forces acting on the ACTS	22
3.3	Over actuated ACTS with 6 ground cables and 3 UAVs	23
3.4	Possible UAVs connection to the payload	25
3.5	Possible UGVs connection to the payload	25
4.1	One drone system connected to the ground through a cable	31
4.2	Simplified ACTS with one drone and one ground anchor	33
4.3	Tension directed arbitrary	33
4.4	Payload connected through two cable to the ground	34
4.5	High level control scheme	35
4.6	Gogh Stewart schematics [7]	37
5.1	Architecture overview	41
5.2	Package Diagram	42
5.3	Drone Controller Class Diagram	43
6.1	Graphs	49
6.2	Possible 6 UGVs connections	50
6.3	Possible 3 UAVs connection with one cable	50
6.4	Testing poses	54

List of Tables

5.1	Fixed parameters used in the numerical experiments.	44
6.1	Ground anchor and hook attachment points for the Stewart baseline. . .	46
6.2	Ground cable unit directions.	46
6.3	Comparative performance indices and tracking errors for Stewart baseline configuration across Scenarios A and B.	49
6.4	Pre-screening feasibility of cable-routing architectures	52
6.5	Best routing quality across feasible architectures	53
6.6	Static and dynamic performance indices for the five candidate architec- tures, with rank (1 = best, 5 = worst) shown in parentheses.	54
6.7	Top five manual architectures	54
6.8	Number of target poses that could not be reached by any evaluated con- figuration for each ground-anchor footprint.	57
A.1	Classification of Singularity Types in Cable-Driven Parallel Systems . . .	64
C.1	Performance and force-related metrics for all platform configurations . .	68
C.2	Task execution, kinematic, and stability metrics for all platform configu- rations	69

Contents

1	Introduction	10
2	State of the Art	13
2.1	Cooperative Cable-Driven Aerial Systems	13
2.1.1	Aerial Cable-Towed Systems	13
2.1.2	Cable-Driven Parallel Robots	14
2.1.3	Flying Parallel Robots	14
2.2	Interaction with the Environment	15
2.3	Control of Cable-Suspended UAV Systems	15
2.3.1	Centralized Control	15
2.3.2	Cable Tension and Force Control	16
2.4	My work in the current state of the art	17
3	ACTS Design and Modeling	18
3.1	System Architecture	18
3.2	Kinematostatic model	19
3.2.1	Kinematic model	19
3.2.2	Static model	21
3.2.3	Kinematostatic model	22
3.3	Architecture Design	22
3.3.1	Design Variables	23
3.3.2	Performance Metrics	26
3.3.3	Selection Strategy	29
4	Control of the ACTS	31
4.1	Force control with a point-mass payload	31
4.1.1	Case: one drone connected to the ground through a cable	31
4.1.2	Case: payload connected to the ground and a drone	32
4.1.3	Case: payload connected to the ground through two cables	33
4.2	Extension to the Complete ACTS Architecture	35
5	Simulation Environment and Experimental Setup	39
5.1	Role of Simulation in the Thesis	39
5.2	Simulator Selection	39
5.2.1	Gazebo Environment	39
5.2.2	MuJoCo Environment	40
5.3	Software architecture (UML)	40
5.4	Simulation setup	43

5.5	Simulation methodology and evaluation framework	43
6	Simulation results	45
6.1	Stewart platform baseline	45
6.1.1	Numerical Verification of the Baseline Configuration	46
6.1.2	Comparison between tension allocation strategies	48
6.2	Statistic tests	51
6.3	Ground cable routing	51
6.4	Ground anchor placement	55
6.4.1	Results with reduced anchor spread	55
6.4.2	Results with increased anchor spread	56
6.4.3	Considerations on the anchor spacing	56
6.5	Drone hook placement	57
6.5.1	Stewart cable routing	57
6.5.2	Point	58
6.5.3	Aligned	58
6.5.4	Disaligned	58
6.5.5	Line	58
6.5.6	Diagonal	58
6.5.7	Triangle comparison analysis	58
7	Conclusions	60
	Appendix	63
A	Singularities and Performance Indices	64
B	Statistical Methods	65
B.1	Friedman Test	65
B.2	Cochran's Q Test	66
B.3	Pairwise Comparisons	66
B.4	Multiple Comparison Correction	66
C	Complete Evaluation Results	67

Introduction

This thesis work takes place in the context of the ShieldBot project, which aims to revolutionize the construction, renovation, and maintenance sectors by investigating and validating a new generation of robotic systems tailored to the industry's unique challenges [1]. The ShieldBot project focuses on three complementary robotic solutions:

- InnerShieldBot is designed for internal construction works to enhance the thermal performance of walls and ceilings.
- InspectionShieldBot is dedicated to identify structural or insulation needs, and ensure long-term building integrity.
- FaçadeShieldBot is designed to operate on building façades and install thermal shielding in order to improve insulation and reduce energy consumption.

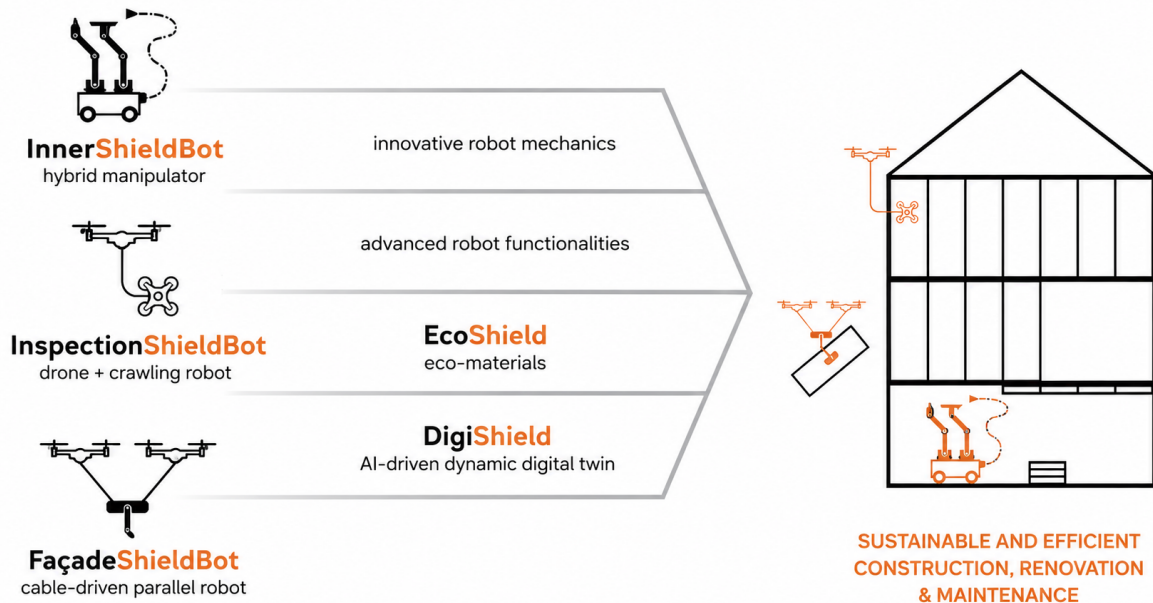


Figure 1.1: Robotic solutions developed by the ShieldBot project [1]

This thesis focuses on the robotic manipulation challenges inherent to the FaçadeShieldBot scenario. The system must generate sufficient force to manipulate the payload while

maintaining a stable pose, as the application requires transporting and accurately positioning a payload near a vertical surface. At the same time, it must operate across large façades without requiring complex or permanent infrastructure on the building.

The overall system employs a platform-mounted robotic arm to manipulate and position tools along the surface. However, the scope of this work is strictly centered on the aerial platform itself and its ability to maintain a controlled pose without relying on permanent building infrastructure.

Previous robotic developments have demonstrated the potential of cable-based systems for construction applications. For example, the TitanBot project investigates cable-driven parallel robotic (CDPR) systems capable of transporting loads over large areas and reducing the physical effort required from construction workers [2]. Such systems benefit from the mechanical simplicity and large workspace offered by cable-based actuation. Additionally, their actuators can be located away from the manipulated payload, which makes them particularly attractive for applications involving heavy loads. However, conventional configurations generally rely on fixed or ground-based cable attachment points, which can limit their flexibility when operating over complex or changing environments.

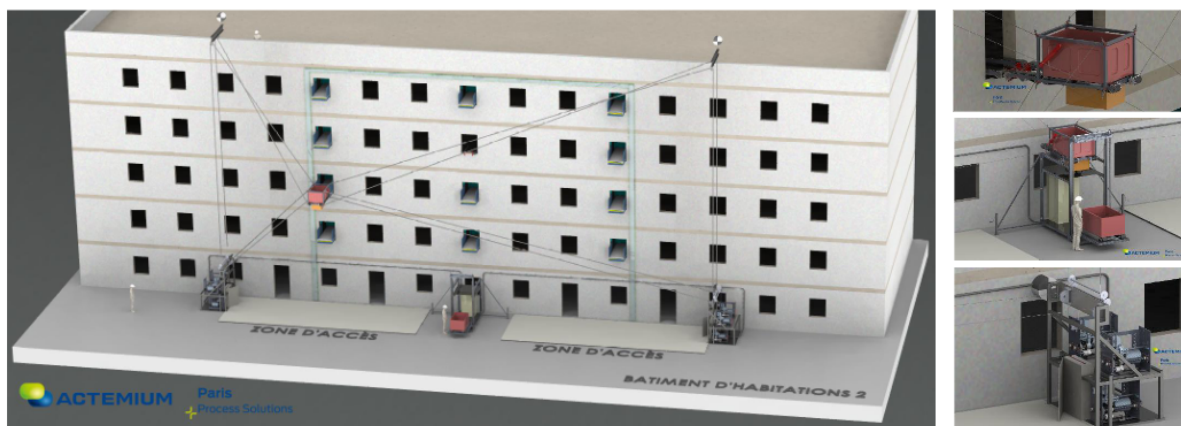


Figure 1.2: Solution proposed by TitanBot project [2]

Add a figure

Aerial robotic systems are a promising approach to access tight and difficult-to-reach areas while reducing the need for traditional scaffolding. Additionally, the use of cables introduces distance between the UAVs and the building, removing direct contact between the two. This is advantageous from a safety and operational perspective, as it reduces the risk of unintended collisions and the impact of the airflow generated by the rotors, allowing the system to safely come into contact with vertical surface [8].

Nonetheless, the position and orientation of the UAVs directly influence the forces and moments that can be generated through the cables. As a result, accurate positioning of the payload can become difficult, particularly when the system is required to perform precise manipulation close to a façade. These limits are especially critical in applications where the payload needs to be precisely positioned and then manipulated against a vertical surface.

The combination of aerial and ground-based actuation can improve the ability of the system to generate and control forces during interaction with the façade while retaining the flexibility of an aerial cable-towed system.

The resulting system, however, is characterized by a large set of design parameters that need to be selected at the design stage and remain fixed during the operation. They strongly influence the workspace, wrench feasibility, controllability, robustness, and energy efficiency of the system. The main design degrees of freedom include:

- The number of aerial and ground vehicles (UAVs and UGVs), which determines the level of actuation redundancy and force distribution capability;
- The number of cables and their routing, which affect the achievable wrench set and the system's stability;
- The cable length actuation strategy, such as fixed-length or winch-actuated cables;
- The system architecture and graph rigidity, including centralized and decentralized control configurations.

As a result, architectural design cannot be isolated from control system development. A configuration that is mechanically feasible may nevertheless provide poor force distribution or positioning performance in the region of interest. Conversely, an appropriate choice of architecture and attachment locations can improve the controllability and robustness of the system without necessarily increasing its mechanical complexity.

The main objective of this thesis is to study the modelling, design, and control of a hybrid Aerial Cable-Towed System (ACTS) for payload manipulation. In particular, the thesis focuses on how the architecture and cable configuration influence the ability of the system to manipulate a payload and generate the required payload wrench. The work focuses on the selection of suitable cable routing and attachment configurations and on the development of a control approach based on the resulting system model. The proposed configurations are evaluated through simulation to assess their performance and identify the most suitable architecture for the considered application.

The thesis is organized as follows.

Chapter 2

Chapter 3

Chapter 4

Chapter 5

Chapter 6

Chapter 7

State of the Art

2.1 Cooperative Cable-Driven Aerial Systems

Several robotic architectures can be considered for the manipulation of a payload using multiple aerial vehicles. Among them, Cable-Driven Parallel Robots (CDPRs), Aerial Cable-Towed Systems (ACTSs), and Flying Parallel Robots (FPRs) are particularly relevant to the problem considered in this thesis. These architectures differ mainly in how the payload is connected to the actuators and consequently in their workspace, force-generation capabilities, and mechanical complexity.

2.1.1 Aerial Cable-Towed Systems

An Aerial Cable Towed Robot (ACTR) is a robotic system where the load is connected to multi-rotor UAVs through cables [3]. Other cables may be actuated also by non-aerial devices, such as actuators fixed to the ground or UGVs. In these systems, the payload motion is achieved by coordinating the cable tensions generated by the different actuators.

While standard ACTRs are limited in the directions and magnitudes of forces they can generate, the combination of mobile UAVs and fixed ground anchors enables the system to adapt its available wrench set to task requirements. This allows the platform to exert higher and more controllable interaction forces compared to configurations without a ground-based tension reference [9].

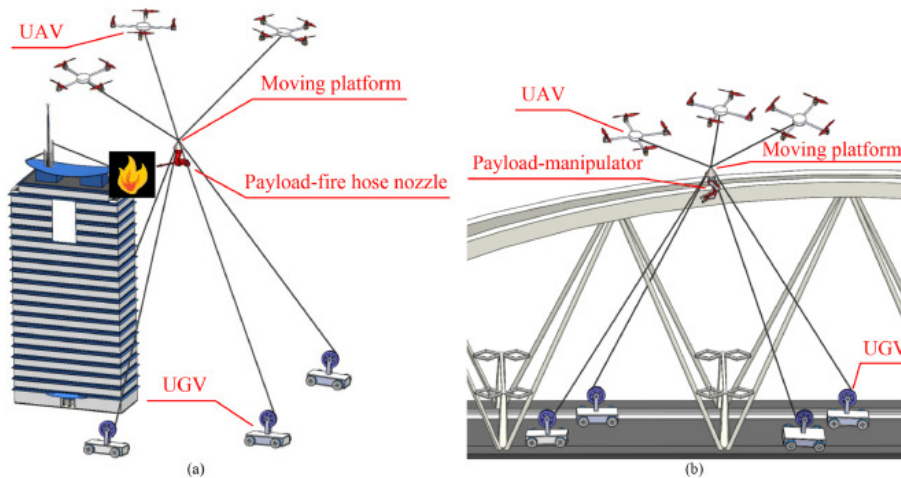


Figure 2.1: ACTRs with land-fixed winches for firefighting applications (a) and repair of a large bridge (b) [3]

2.1.2 Cable-Driven Parallel Robots

In conventional CDPRs, the end-effector is manipulated through flexible cables connected to fixed anchor points on the ground, and its motion is controlled by adjusting the cable lengths. Although CDPRs do not employ aerial robots, their analysis can be beneficial for making progress on ACTSs. As proposed by [8], ACTSs can be interpreted as reconfigurable CDPRs (RCDPRs), where fixed anchor points are replaced by mobile aerial platforms. For this reason, existing results on CDPR kinematics, dynamics, and control should not be ruled out a priori. A fundamental difference between CDPRs and ACTSs lies in the available tension space. In classical CDPR the tension's limits are fixed and do not depend on the robot's pose: the minimum tension is usually a small positive value to avoid slack, while the maximum tension is set by the motor torque. On the other hand, UAVs in ACTSs must always generate enough thrust to keep itself in the air and maintain its attitude, reducing the tension margin available for payload manipulation [10]. Therefore, CDPR findings can still be used for ACTSs, but they need to be adapted by introducing additional constraints due to the quadrotor actuation limits [8, 11].

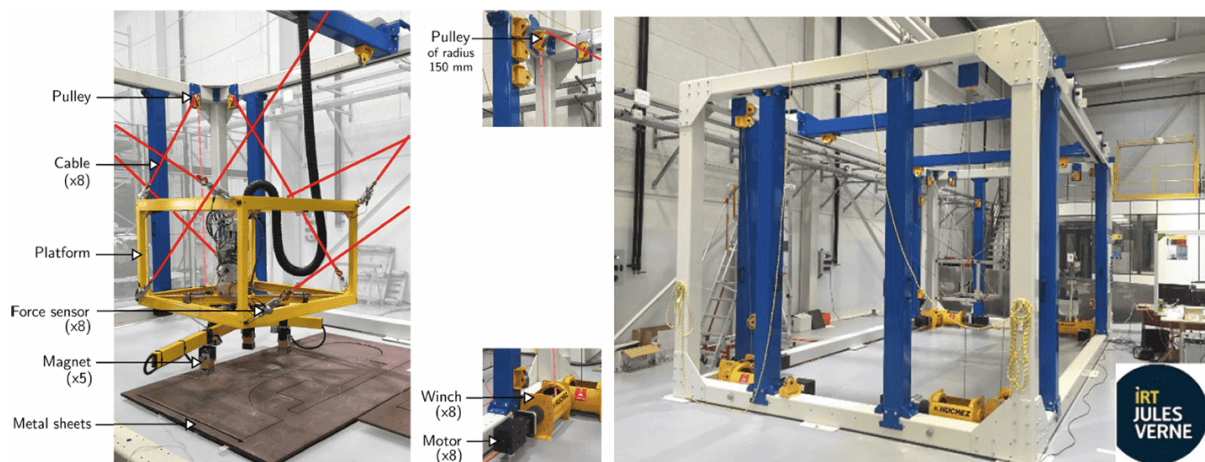


Figure 2.2: CDPR located at IRT Jules Verne [4, 5]

2.1.3 Flying Parallel Robots

Professor question: How is that different from ACTS? Make it more explicit

Flying Parallel Robots (FPRs) changes from the previous two designs in that they connect the UAVs to the manipulated platform by rigid connections rather than cables, allowing both pushing and pull forces to be transmitted. Thus, the payload can be moved more freely since it has extra passive degrees of freedom inside its legs, also known as kinematic chains. These can be reoriented without actuation, resulting into a platform that isn't over-constrained [12]. While this property can be helpful in interaction tasks, rigid links significantly increases the system's weight and the mechanical complexity [6]. Introducing UGVs in ACTSs as ground anchor points allows pulling forces, expanding the force applicable during interaction tasks. Lastly, even though cables cannot transmit compressive forces, the coordinated control of multiple cable tensions allows the system to counteract reaction forces arising during contact with vertical surfaces, achieving similar objectives without the need for rigid mechanical connections.

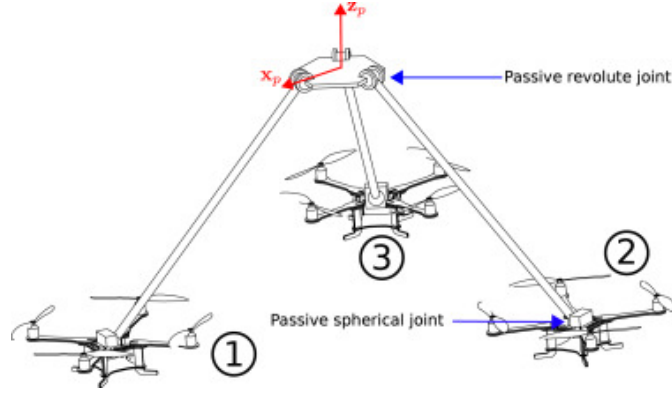


Figure 2.3: Kinematic scheme of the 3-DSR flying parallel robot [6]

2.2 Interaction with the Environment

How is it different from any robot?

Physical interaction is particularly challenging for aerial robotic systems because the motion of an aerial vehicle directly affects the forces it generates.

Aerodynamic disturbances and modelling uncertainties further complicate the control of the system [12]. In a cable-suspended system, these effects are coupled: a change in the position of one UAV or of the payload modifies the cable directions and consequently the forces experienced by the other agents [13].

These challenges become particularly important when the payload operates close to a vertical surface. Accuracy is a critical requirement in such applications, and interaction with the environment introduces additional force constraints that are not present during free-space motion [9].

Near-façade operation can also be affected by aerodynamic phenomena. Ground and ceiling effects modify the UAV dynamics, while the propeller wash generated by one UAV can disturb other vehicles operating in proximity [6, 13]. Furthermore, uncertainties in payload mass and inertia can affect the required thrust and lead to tracking errors or actuator saturation [8, 13].

Several forms of interaction have been considered for ACT systems, including unexpected collisions, planned contact, and active interaction with an external agent [14]. For the FaçadeShieldBot application, the relevant case is planned physical interaction with a vertical surface.

2.3 Control of Cable-Suspended UAV Systems

2.3.1 Centralized Control

Control architectures for cooperative aerial transportation can broadly be classified as centralized, distributed, or decentralized. In a centralized architecture, information about the UAVs, payload, and system configuration is available to a common controller. This allows the controller to coordinate the agents and explicitly account for the coupling between their motions.

A common approach is to model the ACTS as a continuously reconfigurable cable-driven parallel robot. In this framework, the controller can coordinate the payload mo-

tion, cable tensions, and UAV motion within a single control architecture [11, 8].

In [11], the design of a centralized trajectory tracking controller is proposed that explicitly accounts for both the kinematics and dynamics of the system. The control architecture is structured into three main layers:

- A task-space control loop that computes the desired wrench acting on the payload;
- A tension distribution algorithm that determines a feasible set of cable tensions realizing that desired wrench; and
- A joint-space control loop that converts the required cable forces into thrust and attitude commands for each quadrotor.

The difference is not clear to me

Differently, in distributed control systems, each agent computes its control action based on locally accessible information, which may be integrated with data resulting from the physical interaction with the shared payload. In this context, consensus algorithms allow individual robots to estimate global properties, such as formation parameters [15]. Lastly, in decentralized approaches, it is crucial that the ACTS maintains bearing rigidity in order to ensure that the system can reconstruct and preserve the formation geometry using only local measurements, avoiding uncontrolled motions and degenerate configurations.

The system considered here is assumed to operate under centralized control, for which the states and configuration of the relevant agents are available to a common controller.

2.3.2 Cable Tension and Force Control

Cable tension management is fundamental to the control of cable-driven systems because cables can only transmit tensile forces. The controller must therefore ensure that the tensions remain positive to prevent cable slackness and maintain the desired mechanical configuration.

In redundant cable-driven systems, several sets of cable tensions can generate the same net wrench on the payload. This redundancy can be exploited to satisfy additional constraints while maintaining the desired payload wrench. In particular, internal forces corresponding to the null space of the wrench mapping can be used to modify the tension distribution without changing the resulting payload wrench [11, 9].

For ACTSs, tension feasibility is further constrained by the UAVs' actuation limits. Each UAV must allocate part of its available thrust to compensate for its own weight and maintain its attitude, leaving only a limited portion of its actuation capability for payload manipulation [10]. A valid control solution must therefore consider both the desired payload wrench and the available actuation capabilities.

More recent approaches incorporate cable tension constraints directly into trajectory optimization, allowing future trajectories to be evaluated according to their feasibility with respect to cable tension and actuator limits [13]. Such approaches demonstrate the importance of considering cable forces explicitly when planning or controlling cooperative aerial systems.

2.4 My work in the current state of the art

Where does this work position in the current state of the art? What are the scientific challenges?

ACTS Design and Modeling

3.1 System Architecture

To formulate a general methodology, it is important to adopt a parameterization of the ACTS. We consider an ACTS with n_q quadrotors, n_g ground vehicles, m cables, and a load with d degrees of freedom. The i -th quadrotor is connected to the load at point B_i through a cable of length l_i , whose other end is fixed to the vehicle at point A_i , for $i = 1, \dots, n_q$. Similarly, the j -th ground vehicle is connected to the load at point B_j via a cable of length l_j , attached to the vehicle at point A_j , for $j = 0, \dots, n_g$. To avoid ambiguity between aerial and ground actuators, alphabetical indices may be used in the latter case to distinguish the two sets of vehicles [10].

We can also define the following systems of reference:

- $F_0(O, x_0, y_0, z_0)$ as the inertial reference world frame;
- $F_p(P, x_p, y_p, z_p)$ as the frame attached to the platform at its center of mass;
- $F_i(A_i, x_i, y_i, z_i)$ as the frame attached to the quadrotor at point A_i , with the z -axis normal to the plane of the rotors;
- $F_{C_i}(A_{C_i}, x_{C_i}, y_{C_i}, z_{C_i})$ as the frame attached to the quadrotor at its center of mass A_{C_i} with the x -axis pointing forward, the y -axis pointing left and the z -axis pointing upwards;
- $F_k(A_k, x_k, y_k, z_k)$ as the frame attached to the ground vehicle at point A_k , with the z -axis normal to the ground.

In particular, since the ground vehicles are considered fixed in pose, also their reference frame is inertial and the fixed in time transformation matrix T_k from the reference world frame to each ground vehicle is known.

In this thesis, the following assumptions are adopted:

- The cables are modeled as massless, non-extensible and perfectly straight [14, 10, 8];
- The cable attachment point coincides with the quadrotor's center of mass [6, 10, 12];
- There are no aerodynamic disturbances, such as the rotor wash [6, 12, 15];
- The flight is quasi-stationary and the aerodynamic friction and resistance can be neglected in the dynamic model [16, 10];

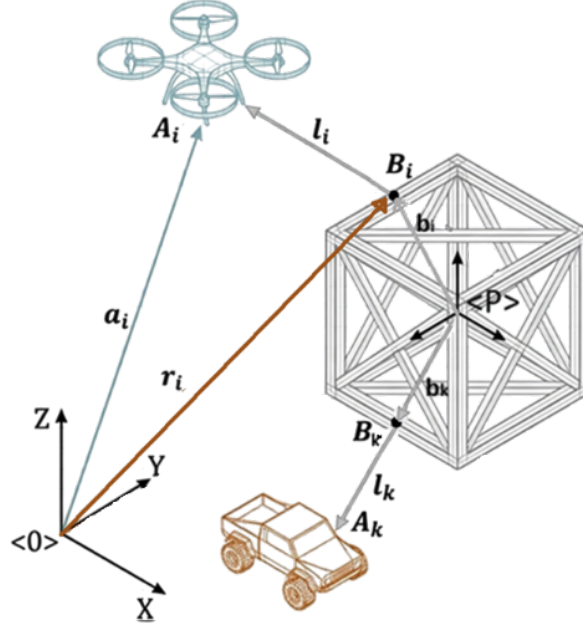


Figure 3.1: Graphical representation of the platform

If the flight is quasi-stationary, do we really have a dynamic model or just a static model?

Lastly, the ground vehicles will be considered fixed anchoring points, as the ShieldBot project is still at its early stages.

3.2 Kinemastatic model

As talked about in Section 2.1.2, it is possible to model cable-suspended UAV systems as reconfigurable cable-driven parallel robots (RCDPRs), where the traditional fixed actuators are replaced by mobile UAVs, possibly integrated with land-fixed winches to balance interaction forces at high altitudes.

A kinemastatic model is a model that combines kinematics (motion and geometry) with statics (forces and equilibrium) to describe how a mechanical system moves and how forces are transmitted through it.

3.2.1 Kinematic model

What is the convention for bold vs normal characters?

Given the payload twist ${}^0\xi = [{}^0v_p \ {}^0\omega_p]^\top$ in the inertial reference frame $\langle 0 \rangle$, we can write the position and velocity of the attachment point B_i (resp. B_k) of the aerial vehicle (resp. ground) in $\langle 0 \rangle$.

$${}^0\mathbf{r}_i = {}^0\mathbf{p} + {}^0_P R^P \mathbf{b}_i \quad (3.1)$$

where b_i is the attachment point on payload.

$${}^0\dot{\mathbf{r}}_i = {}^0\mathbf{v}_p + {}^0\boldsymbol{\omega}_p \times ({}^0_P R^P \mathbf{b}_i) \quad (3.2)$$

For definition, the cable vector is $\mathbf{l}_i = \mathbf{a}_i - \mathbf{r}_i = A_i - B_i$ with $\mathbf{a}_i$ being the anchor position. Under a centralized controller, the positions of all UAV A_i and UGV A_k are known which directly determine the anchor vector $\mathbf{a}_i$. Furthermore, the payload's position and orientation are assumed to be known together with the known locations of the attachment points relative to the payload, this information allows us to calculate the cable vectors $\mathbf{l}_i$.

The final form of cable vector variation is given by applying Equation 3.2 in its definition:

$$\dot{\mathbf{l}}_i = \dot{\mathbf{a}}_i - \dot{\mathbf{r}}_i = \dot{\mathbf{a}}_i - \frac{d}{dt} (\mathbf{p} + {}_P R^P \mathbf{b}_i) = \dot{\mathbf{a}}_i - (\mathbf{v}_p + \boldsymbol{\omega}_p \times ({}_P R^P \mathbf{b}_i)) \quad (3.3)$$

Each $\dot{l}_i$ corresponds to the projection of the relative velocity of B_i along the cable direction

$$\begin{aligned} \dot{l}_i &= \mathbf{u}_i^\top (\dot{\mathbf{a}}_i - (\mathbf{v}_p + \boldsymbol{\omega}_p \times ({}_P R^P \mathbf{b}_i))) \\ &= \mathbf{u}_i^\top \dot{\mathbf{a}}_i - [\mathbf{u}_i^\top \quad ({}_P R^P \mathbf{b}_i \times \mathbf{u}_i)^\top] \xi \\ &= J_{a,i} \dot{\mathbf{a}}_i - J_{p,i} \xi, \end{aligned} \quad (3.4)$$

This gives us the kinematic model that relates the variation of cable length vector $\boldsymbol{\rho}$ with the change in position of the anchors and the payload twist:

$$\dot{\boldsymbol{\rho}} = J_a \dot{\mathbf{a}} - J_p \xi = J_a \begin{bmatrix} \dot{a}^{(a)} \\ \dot{a}^{(g)} \end{bmatrix} - J_p \xi \quad (3.5)$$

Let $m = n_a + n_g$ be the total number of winches (or cables) and $u_i = l_i / \|\mathbf{l}_i\|$ the unit cable direction, then:

- $\dot{\boldsymbol{\rho}} = [\dot{l}_1 \quad \dot{l}_2 \quad \dots \quad \dot{l}_m]^\top$ is the cable length rate (dimension $[m \times 1]$).
- J_a is the Jacobian relating the anchor velocities to the cable-length rates $[m \times 3m]$. In particular, each cable depends only on its anchor velocity.

$$J_a = \begin{bmatrix} u_1 & 0 & \dots & 0 \\ 0 & u_2 & \dots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \dots & u_{n_a+n_g} \end{bmatrix}, \quad u_j = \frac{(a_j - r_j)}{\|a_j - r_j\|}. \quad (3.6)$$

- J_p is the Jacobian relating the payload twist to the cable-length $[m \times 6]$

$$J_p = \begin{bmatrix} \mathbf{u}_1^\top & ({}_P R^p \mathbf{b}_1 \times \mathbf{u}_1)^\top \\ \vdots & \vdots \\ \mathbf{u}_m^\top & ({}_P R^p \mathbf{b}_m \times \mathbf{u}_m)^\top \end{bmatrix} \quad (3.7)$$

The control allocation matrix maps the actuator inputs (cable tension vector) to the system (payload) wrench. For this definition $J_p^\top$ is the allocation matrix.

$$\mathbf{W}_p = J_p^\top \boldsymbol{\tau} \quad (3.8)$$

Let $\mathbf{W}_p^*$ be the desired payload wrench, the control allocation problem to solve is

$$J_p^\top \boldsymbol{\tau} = \mathbf{W}_p^*, \quad \text{s.t. } \tau_i > 0 \quad (3.9)$$

3.2.2 Static model

Let $\tau = [\tau_{uav}^\top, \tau_{ugv}^\top]^\top \in \mathbb{R}^{m \times 1}$ be the cable tension vector, then

$$\begin{aligned} \underbrace{\tau^\top \dot{\rho}}_{\text{total cable power}} &= \underbrace{\tau^\top J_a \dot{a}}_{\text{UAVs and UGVs mechanical power}} - \underbrace{\tau^\top J_p \xi}_{\text{payload power}} \\ &= (J_a^\top \tau)^\top \dot{a} - (J_p^\top \tau)^\top \xi \\ &= F_a^\top \dot{a} - W_p^\top \xi \end{aligned} \quad (3.10)$$

Each cable i applies a force on the payload $F_{a,i}$ and an equal and opposite force on the UAV (resp. UGV). We can write balance equation on our elements:

Payload Balance

$$\underbrace{W_p}_{J_p^\top \tau} + \underbrace{W_g}_{\begin{bmatrix} 0 \\ 0 \\ -m_p g \\ 0 \\ 0 \\ 0 \end{bmatrix}} + W_{contact} + \underbrace{W_{wind}}_{\text{let} = 0} = 0 \quad (3.11)$$

where since each cable produces a wrench on the payload, the contribution given by the i -th cable is:

$$\underbrace{w_{p,i}}_{6 \times 1} = \underbrace{J_{p,i}^\top}_{6 \times 1} \underbrace{\tau_i}_{1 \times 1} = [u_i^\top \quad ({}^P R^P b_i \times u_i)^\top]^\top \tau_i = \begin{bmatrix} \tau_i u_i \\ ({}^P R^P b_i \times \tau_i u_i) \end{bmatrix} \quad (3.12)$$

and $W_{contact} = 0$ when there is no contact with the environment.

UAV balance

$$-F_{a,i} + F_{prop,i} + \underbrace{F_{g,i}}_{\begin{bmatrix} 0 \\ 0 \\ -m_i g \end{bmatrix}} = 0 \quad (3.13)$$

with ${}^i F_{prop} = [0 \quad 0 \quad F_{prop,z,i}]^\top$ and $F_{a,i} = J_{a,i}^\top \tau_i = \tau_i u_i$.

UAVs must always generate sufficient thrust to maintain flight and ensure their own stability. As a result, only a portion of their available thrust can be allocated to payload manipulation, which reduces the effective force that can be transmitted through the cables.

UGV balance

$$-F_{a,j} + \underbrace{F_{ground,j}}_{\begin{bmatrix} F_{frict,x,j} \\ F_{frict,y,j} \\ F_{norm} \end{bmatrix}} + \underbrace{F_{g,j}}_{\begin{bmatrix} 0 \\ 0 \\ -m_j g \end{bmatrix}} = 0 \quad (3.14)$$

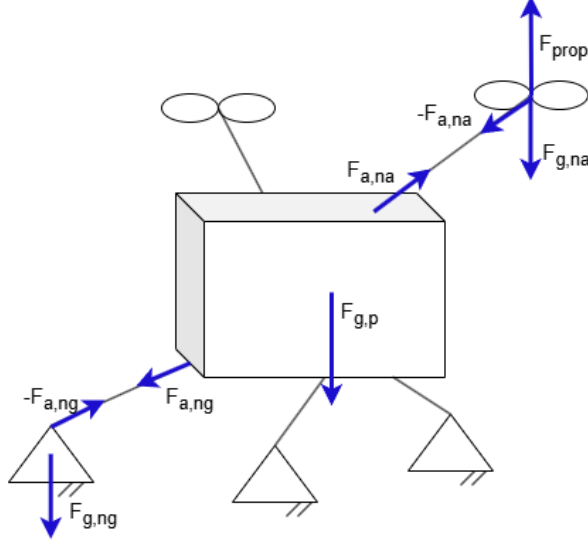


Figure 3.2: Forces acting on the ACTS

with $\|F_{frict}\| \leq \mu F_{norm}$, $F_{norm} = m_j g - F_{a,z,j}$ and $F_{a,j}$ is obtained through Equation 3.15.

Similarly, UGVs are subject to ground interaction constraints. In particular, they must satisfy friction limits to remain stationary when no motion is commanded. This imposes bounds on the admissible cable forces, as excessive tension may cause slipping. By Newton's third law, the force the cable exerts on the drone $F_{a,i}$ (resp. on the UGV $F_{a,j}$) is equal and opposite to the force it exerts on the payload. Since u_i points from B_i toward A_i , the cable pulls the drone with

$$F_{a,i} = J_{a,i}^\top \tau_i = \tau_i u_i \quad (3.15)$$

As a consequence, the total cable force on the payload is:

$$F_p = - \sum_{i=1}^{n_a} F_{a,i} - \sum_{j=n_a+1}^{n_a+n_g} F_{a,j} \quad (3.16)$$

where the payload wrench is $W_p = [F_p \quad M_P]^\top$

3.2.3 Kinemastatic model

Writing Equation 3.11, 3.13 and 3.14 in terms of τ , we obtain:

$$W_{sys} = \begin{bmatrix} W_p \\ F_a \end{bmatrix} = \begin{bmatrix} J_p^\top \\ J_a^\top \end{bmatrix} \tau = G\tau = \begin{bmatrix} -W_g - W_{contact} - W_{wind} \\ F_{prop} + F_{ground} + F_g \end{bmatrix} \quad (3.17)$$

where $F_{prop,j} = 0$ for the UGVs and $F_{ground,i} = 0$ for the UAVs. Then W_{sys} is $(6+3m) \times 1$ and

$$G\tau + \begin{bmatrix} W_g + W_{contact} + W_{wind} \\ -F_{prop} - F_{ground} - F_g \end{bmatrix} = 0 \quad (3.18)$$

3.3 Architecture Design

The configuration of a Aerial Cable Towed System (ACTS) has a direct influence on its workspace, force-generation capabilities, controllability, and energy consumption. For

a given payload pose, multiple equilibrium configurations may exist, corresponding to different distributions of internal cable forces that do not modify the resulting net wrench acting on the payload. Although these configurations satisfy the same static equilibrium conditions, they can require significantly different UAV positions and cable tensions, leading to different energy consumption and robustness properties [17]. Consequently, the architecture of the ACTS must be selected according to the requirements of the intended application.

3.3.1 Design Variables

Each configuration is characterized by parameters such as the number and arrangement of aerial and ground actuator, the cable attachment points, and the cable routing. More specifically, the ACTS consists of at least one UAV, required as the payload needs to be lifted from the ground, and one UGV, included for safety and operational constraints. Lastly, for a rigid payload with six degrees of freedom, at least six independent cable are required to generate a general six-dimensional payload wrench.

In this thesis, we suppose working with nine actuators, three aerial and six on the ground. Since we are interested in working with an over-actuated system, in this thesis we suppose working with nine actuators, three aerial and six on the ground. While the latter are used to fully control the payload pose, the three drones will act as an anti-gravitational force. A schematic is shown in Figure 3.3. The candidate architectures are subsequently evaluated using the performance indices introduced in Section 3.3.2.

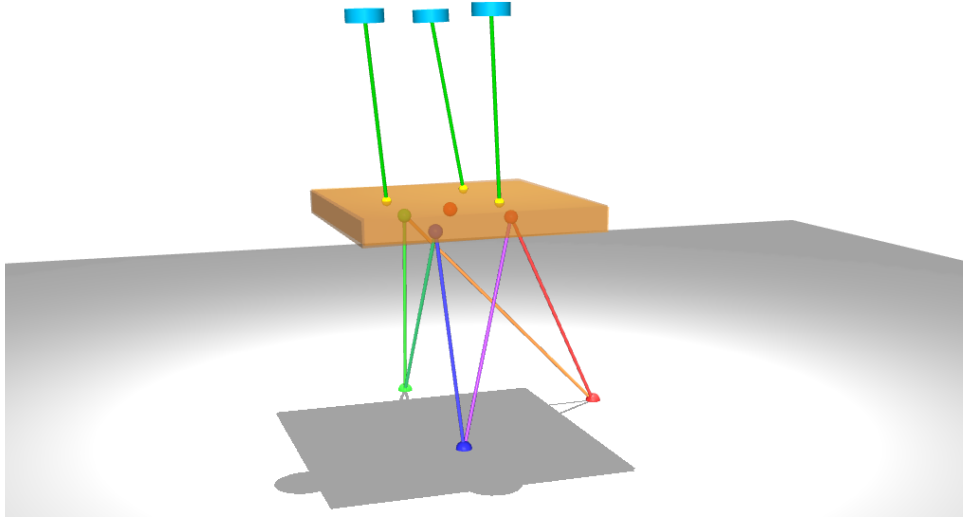


Figure 3.3: Over actuated ACTS with 6 ground cables and 3 UAVs

Aerial Actuators

The configuration of the UAV connections is crucial, as it directly affects how forces are applied to the payload: UAVs are responsible for generating the lifting force required to lift the payload. Consequently, their number depends strongly on the payload mass. However, an increased number of UAVs does not necessarily improve the performance of the system. Additionally, each UAV can be connected to the payload using either a single

cable or multiple cables. The choice of configuration affects controllability, wrench feasibility, robustness, and energy efficiency and should be evaluated accordingly. A practical compromise is to use three UAVs connected to the payload at distinct attachment points, providing a balance between the metrics just mentioned (Figure 3.4).

As we will see in later discussions, the main alternatives considered in this work are illustrated in Figure 6.3.

Ground Actuators and Anchors

In contrast, UGVs do not lift the payload, so the same stability arguments are not valid. If we treat the UGVs as fixed anchor points, connecting a single UGV to multiple hook points on the payload simplifies to a standard fixed-anchor scenario. Because each actuator operates independently, this configuration adds no extra mathematical complexity. However, if the UGVs are actively moving, multi-cable connections require precise winch coordination to ensure all cables remain taut at all times. In Figure 3.5, possible payload hook attachments can be found.

The number and spatial distribution of these anchors affect the directions of the corresponding cable forces and therefore the wrench that can be generated at the payload. Different anchor layouts can consequently lead to different force and moment capabilities.

Payload Attachment Points

The locations of the cable attachment points on the payload directly affect the moments generated by cable tensions. Attachment points that are more widely separated can provide larger moment arms, whereas closely spaced attachment points result in different wrench and conditioning properties.

The attachment points are therefore treated as design variables in the architecture selection process.

Ground Anchor Placement and Cable Routing

The positions of the ground anchors determine the directions of the ground cables for a given payload pose. Their arrangement consequently affects both the achievable wrench and the distribution of cable tensions.

In addition to anchor placement, the routing of the cables between the ground anchors and the payload attachment points is considered as a design variable. Candidate routings include crossed and uncrossed arrangements, as well as adjacent and diagonal connections. These different routings can produce different cable directions and therefore different force-generation capabilities.

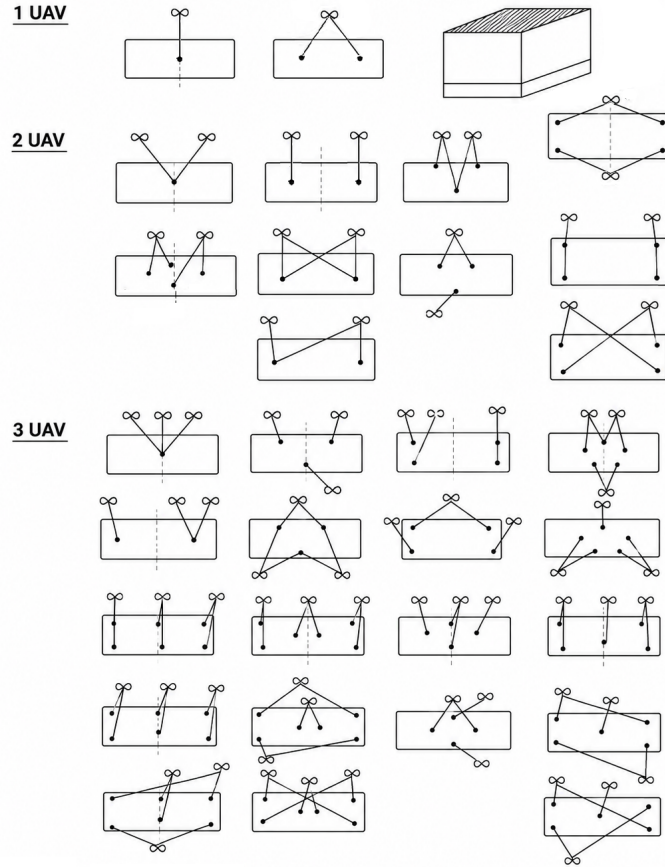


Figure 3.4: Possible UAVs connection to the payload

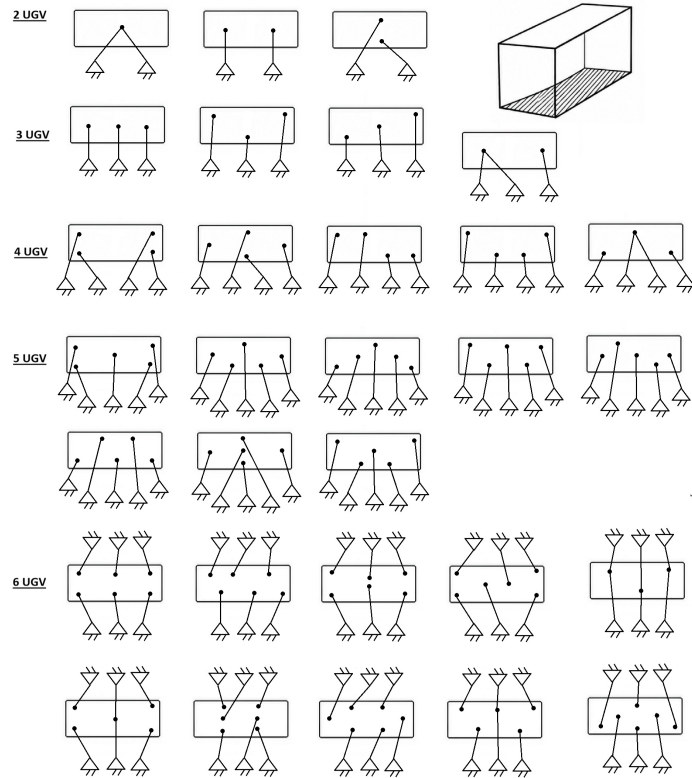


Figure 3.5: Possible UGVs connection to the payload

3.3.2 Performance Metrics

In the context of the ShieldBot project, we are working with two questions:

1. Which attachment geometry gives the best ability to generate the required payload wrench over the entire mission workspace?
2. Given the chosen architecture, where should the actuators (UAVs and anchor points in the ground) be positioned, and what cable lengths should be used during operation?

In both cases, we need an objective measurement that guides us in the selection. Every configuration to be eligible needs to satisfy feasibility metrics first, such as [18]:

- Wrench closure conditions (WCC), which guarantees that the payload is fully constrained and arbitrary wrenches can be generated. Mathematically: $\text{rank}(J_p) = 6$ and positive tensions exist.
- Wrench Feasible Condition (WFC), which checks whether tensions remain in the feasible bound $0 \leq \tau_{\min} \leq \tau \leq \tau_{\max}$, included UAV thrust limits, cable strength limits and UGV friction limits in a future where the ground anchor point will be movable.
- Interference-Free Condition (IFC), ensuring that there is no cable rubbing and no collision with payload edges. Mathematically:

$$\begin{aligned} d_{ij} &\geq d_{\text{safe}}, \quad \text{where } d_{ij} = \text{dist}(\text{cable } i, \text{cable } j) & \forall i, j \\ d_i &\geq d_{\text{safe}}, \quad \text{where } d_i = \min_{s \in [0,1]} (\text{dist}(r_i + s(a_i - r_i), P)) & \forall i \end{aligned} \quad (3.19)$$

where P is the payload geometry and d_{safe} is a clearance threshold.

However, assuming that all cable attachment points are on the same face of the payload, the only feasible interference between the latter and one of the cables is a near-tangent cable that touches that face.

After passing the feasibility filters, we need a way to assign a score to each hook configuration.

Capacity margin or minimum degree of constraint satisfaction

The capacity margin is a robustness index that is used to analyze the degree of feasibility of a configuration. The feasibility region is the set of all poses and geometric configurations in which the system can physically balance a required task wrench, such as gravity or external interaction forces, while satisfying the quadrotor's actuation limits and the physical constraints of the cables [10]. It is defined as the shortest signed distance from the task wrench to the boundary of the available wrench set (AWS). Mathematically, it is the minimum of the distances of each one of the n vertices $w_{e,j}$ to each one of the p facets $(\mathbf{a}_l, b_l)$ of the AWS.

$$\gamma = \min_{j=1 \div n} \min_{l=1 \div p} \gamma_{j,l}, \quad \text{where } \gamma_{j,l} = \frac{b_l - w_{e,j}^\top \mathbf{a}_l}{\|\mathbf{a}_l\|_2} \quad (3.20)$$

where $\mathbf{a}_l$ is the normal vector to the l -th facet and b_l is its offset [19].

The wrench vector combines force components (N) and moment components (Nm), which are not directly comparable in a Euclidean sense. Computing the capacity margin γ by measuring facet distances in the raw, mixed-unit wrench space would make γ depend on the arbitrary choice of length unit used to express the cable attachment points, rather than on the physical robustness of the configuration. Following Ruiz et al. [19], the moment components of the wrench are therefore rescaled by a characteristic length.

$$r = \sqrt{\frac{1}{m} \sum_i \|b_i\|^2} \quad (3.21)$$

Where b_i is the position of the i -th cable attachment point relative to the payload center of mass, before the capacity margin is evaluated. This rescaling renders all six wrench components dimensionally homogeneous (in force units) and ensures γ is independent of the chosen length scale.

Worst-Case Capacity Margin

Additionally, we can define the worst-case capacity margin as to how far the system remains from actuator saturation in the most demanding operating condition. Mathematically:

$$\zeta = \min \left(1 - \max_i \frac{\tau_i}{\tau_{i,max}} \right) \quad (3.22)$$

Radius of Available Wrench (rAW)

The radius of the available wrench (rAW) is the maximum magnitude of force that the system can generate uniformly in all directions while remaining within admissible tension limits [9]. Its optimization helps identify arrangements that simultaneously maximize force robustness, geometric and collision-avoidance constraints, resulting into an enlargement of the static workspace [9].

$$rAW = \min_i \left(\min \left(\frac{|d_{pi}|}{\|\mathbf{n}_{null,i}\|}, \frac{|d_{qi}|}{\|\mathbf{n}_{null,i}\|} \right) \right) \quad (3.23)$$

being $u_{null,i} = \text{null}(M_i)$ with M_i containing combinations of linearly independent cable unit vectors, d_{pi} and d_{qi} defined as:

$$\begin{aligned} d_{pi} &= \sum_{j \in I^+} \tau_{max} u_{null,i}^T u_j + \sum_{j \in I^-} \tau_{min} u_{null,i}^T u_j - m |u_{null,i}^T g| \\ d_{qi} &= - \sum_{j \in I^-} \tau_{max} u_{null,i}^T u_j - \sum_{j \in I^+} \tau_{min} u_{null,i}^T u_j - m |u_{null,i}^T g| \end{aligned} \quad (3.24)$$

Since the formulation of rAW in [9] considers a point-mass payload, it does not account for the moments generated by the cable tensions about the payload's attachment points. To capture both effects, the radius of the available wrench is therefore split into two independent quantities: rAW_{force} , the maximum pure force the system can generate uniformly in any direction while producing zero net moment, and rAW_{moment} , the analogous quantity for pure moment generation with zero net force. Whereas rAW_{force} admits the closed-form null-space expression of Eq. 3.23, rAW_{moment} is instead obtained through a vertex-enumeration procedure: candidate cable tension vectors satisfying zero net force

at the bounds of the admissible tension box are computed, their corresponding moments $\tau_i(\mathbf{b}_i \times \mathbf{u}_i)$ are collected, and rAW_{moment} is taken as the distance from the origin to the nearest facet of the convex hull of these moment vectors.

Conditioning index

The conditioning index measures how uniformly the system can generate forces and moments in different directions. Mathematically:

$$\nu = \frac{\sigma_{\min}(J_p)}{\sigma_{\max}(J_p)} \in [0, 1] \quad (3.25)$$

$\sigma_{\min}$ and $\sigma_{\max}$ are the minimum and maximum singular values of the Jacobian matrix, obtained via Singular Value Decomposition (SVD) [15]. A small conditioning number indicates a well-conditioned system, far-away from singular configuration.

Isn't it the opposite? Not small but big

Manipulability

The manipulability index, defined as

$$w = \sqrt{\det(J_p J_p^T)} \quad (3.26)$$

measures the volume of the wrench ellipsoid. A value close to 0 means that the system hit a kinematic singularity, while large value means a large overall wrench generation capability.

Composite score

Once the feasibility constraints are satisfied, we may want to proceed either by

$$N = w_1 \hat{\gamma} + w_2 \text{rAW} + w_3 \hat{\zeta} \quad (3.27)$$

where all the metrics are scaled to $[0, 1]$,

$$U^* = \arg \max_U (N(U)) \quad (3.28)$$

3.3.3 Selection Strategy

The architecture search involves a potentially large number of candidate ground-cable routings. Evaluating the complete nonlinear ACTS model for every candidate would be computationally expensive, particularly because the UAV positions and cable directions depend on the selected architecture. Therefore, a two-tier selection strategy is adopted to progressively eliminate unsuitable configurations before performing the more expensive full-system analysis.

Initially, candidate ground-cable routings are screened using the ground-cable subsystem alone. For each routing, the ground-only payload Jacobian ($J_{p,\text{ground}}$) is constructed from the six ground cables and evaluated against the Wrench Closure Condition (WCC), $\text{rank}(J_{p,\text{ground}}) = 6$, and the Interference-Free Condition (IFC), restricted to ground-cable pairs. A routing is discarded immediately if it violates either criterion at any tested pose.

The surviving ground routings are subsequently combined with candidate UAV attachment geometries. For each resulting complete ACTS configuration, the full payload Jacobian, $J_{p,\text{full}}$, is assembled from the ground and aerial cables. Wrench feasibility is then evaluated by solving the bounded optimization problem

$$\min_{\boldsymbol{\tau}} \|J_{p,\text{full}}\boldsymbol{\tau} - \mathbf{W}^*\|^2, \quad \text{subject to} \quad \boldsymbol{\tau}_{\min}^* \leq \boldsymbol{\tau} \leq \boldsymbol{\tau}_{\max}^*, \quad (3.29)$$

where $\mathbf{W}^*$ denotes the desired payload wrench and the tension bounds account for the admissible cable tensions, including the maximum tension imposed by the UAV thrust capabilities.

A configuration is considered wrench-feasible when the minimum residual of Eq. 3.29 is below a prescribed tolerance. The surviving configurations are subsequently compared using the performance metrics defined in Section 3.3.2.

This strategy separates the inexpensive combinatorial screening of ground-cable routings from the more computationally demanding analysis of the complete aerial-ground system. It therefore reduces the number of configurations requiring full nonlinear evaluation while retaining the relevant UAV-dependent constraints for the final architecture selection.

Integrate this?

To eliminate this source of bias, an exhaustive routing search is performed for every pair of payload and ground layouts. All physically valid routings are enumerated while respecting the maximum cable capacity of each attachment point. For every routing, the corresponding payload Jacobian J_p is constructed according to Equation 3.7, and the routing is evaluated over a representative set of payload poses. At each pose, the routing must satisfy the necessary conditions introduced in Section 3.3.2. Routings that fail any of these conditions are discarded. Among the surviving candidates, the routing is assigned its worst-case performance across all poses, and the architecture is finally characterized by the routing that maximizes the conditioning index. In this way, architectures are compared according to their best achievable routing rather than to an arbitrary cable assignment. Architectures are subsequently ranked against one another by worst-case conditioning index.

The composite score N is not used for ranking routings during the exhaustive search because it requires information that is only available after solving the tension planner, such as the optimal cable tensions and the available wrench set. Computing its capacity-based terms is also computationally expensive and unreliable near singular configurations. Additionally, its weighting factors have not been experimentally validated, making it

unsuitable for selecting the best routing. Instead, the search uses the conditioning index (with manipulability as a supporting metric), as it is a parameter-free, geometry-based measure that can be efficiently computed directly from the Jacobian. The composite score and capacity-based metrics are therefore evaluated later during closed-loop simulations, once a routing and tension solution are available.

for the best routing found by conditioning index, the joint (ground+drone) Wrench Feasible Condition is re-evaluated using the nominal drone positions which place each drone directly above its payload hook. If this strict check fails, rather than discarding the routing outright, the drone positions are instead optimized – within their fixed cable length – to minimize the joint WFC residual (`optimize_drone_positions_for_wfc`), and the routing is accepted only if this repositioned configuration satisfies the WFC tolerance at every tested pose. An architecture is reported as *feasible* if at least one routing survives WCC and IFC at every pose and passes the WFC check, either directly or after this rescue.

Algorithm 1 Cable Routing Optimization and Architecture Ranking

```

1: for all (payload_layout, ground_layout) pairs do
2:   Enumerate every valid 6-cable routing
3:   for all routing do
4:     for all pose  $\in$  test-pose set do
5:       Build  $J_p$   $\triangleright$  Eq. 3.7
6:       Check Wrench Closure  $\triangleright \text{rank}(J_p) = 6$ 
7:       Check Wrench Feasibility  $\triangleright 0 \leq \tau_{\min} \leq \tau \leq \tau_{\max}$ 
8:       Check Interference-Freedom  $\triangleright$  Eq. 3.19
9:     end for
10:    Record this routing's worst-case score across all poses
11:  end for
12:  Keep the best surviving routing for this architecture
13: end for

```

Control of the ACTS

Add intro

Drone control the magnitude and direction of thrust, winches control cable length for bottom cables.

4.1 Force control with a point-mass payload

Before going into details on the full consideration, let's analyze some simpler configurations.

4.1.1 Case: one drone connected to the ground through a cable

The goal is to design the drone force F_{prop} such as that the ground tension is controlled. Since only a tension in the cable direction is imposable, an arbitrary force f^* at the ground anchor can be achieved only by moving the drone, changing the cable direction u . Called a the drone's position and b the attachment point to the ground:

$$u = \frac{a - b}{\|a - b\|} \quad (4.1)$$




Figure 4.1: One drone system connected to the ground through a cable

Option 1

Defined the desired cable tension τ^* and the desired cable direction u^* as:

$$\tau^* = \|f^*\| \quad (4.2) \quad u^* = \frac{f^*}{\|f^*\|} \quad (4.3)$$

The ground tension is obtained using the geometric constraint which relates the anchor point to the drone position:

$$a^* = b + l u^* \quad (4.4)$$

where l is the cable length. Equation 4.4 is then used as a reference to compute the propeller force.

$$F_{prop} = m_i g e_3 + K_p(a^* - a) + K_d(\dot{a}^* - \dot{a}) + \tau^* u \quad (4.5)$$

Option 2

Given Newton's Second Law applied to the drone described in Equation 3.13, we are able to estimate the cable force $\hat{f} = F_{a,i}^{est}$

$$m_i \ddot{a}_i = F_{prop,i} - \hat{f} + F_{g,i} \quad \rightarrow \quad \hat{f} = F_{prop,i} + F_{g,i} - m_i \ddot{a}_i \quad (4.6)$$

where all the forces are in the world frame and $\ddot{a}_i$ is the drone linear acceleration. Using Equation 3.13, we would like to apply a propulsion force equal to

$$F_{prop,i}^* = f^* - F_{g,i} \quad (4.7)$$

Finally, the closed loop equation is:

$$F_{prop,i} = F_{prop,i}^* + K_p e + K_d \dot{e}, \quad \text{with } e = f^* - \hat{f} \quad (4.8)$$

The result is given to the attitude controller, which aligns the body z-axis with the commanded thrust vector.

4.1.2 Case: payload connected to the ground and a drone

In this case, we are working with the simplified case of an ACTS composed by a drone, a ground anchor and a point-mass payload. Called with subscript 1 the cable that connects the payload to the drone and with 2 the one that connects it to the ground, for definition the vector u_i , $i = 1 \div n$ is given by

$$u_i = \frac{a_i - p}{\|a_i - p\|} \quad (4.9)$$

being a_i and p respectively the actuator and the payload position.

Payload position control

The goal is to design $F_{prop,1}$ such that the payload reaches a desired position ($p \rightarrow p^*$), which is reachable for the length of the cable.

The payload dynamics is given by:

$$\begin{aligned} m_p \ddot{p} &= \tau_1 u_1 + \tau_2 u_2 - m_p g e_3 \\ &= F_{a,1} + F_{a,2} + F_g \quad \rightarrow \quad F_p = m_p(\ddot{p} + g e_3) \\ &= F_p + F_g \end{aligned} \quad (4.10)$$

The desired payload force is defined using an impedance controller:

$$F_p^* = m_p(\ddot{p}^* + g e_3) + K_p(p^* - p) + K_d(\dot{p}^* - \dot{p}) \quad (4.11)$$




Figure 4.2: Simplified ACTS with one drone and one ground anchor

with $\dot{p}^* = 0$ and $\ddot{p} = 0$ as we required the payload to maintain the position once it is reached. The remaining force to be generated by cable 1 is:

$$F_{a,1}^* = F_p^* - F_{a,2} \quad (4.12)$$

where $F_{a,2} = \tau_2 u_2$. This brings us back to the situation in Section 4.1.1, where $F_{a,1}$ is f^* .

Tension and orientation control

The goal can also be design $F_{prop,1}$ such that an arbitrary force f^* on the ground can be applied ($F_2 \rightarrow f^*$). In other words, $u_2 \rightarrow u_2^*$ and $\tau_2 \rightarrow \tau_2^*$. This case can be interesting to study as in a redundancy system situation, it may be helpful to add additional constraint in one of the cables. The only difference from the previous case is that the desired position for the payload p^* is not an input anymore, but obtained such that the 2nd cable is aligned along the desired direction given by f^* (Equation 4.2 and 4.3). Then:

$$p^* = a_2 - l_2 u_2^* \quad (4.13)$$




Figure 4.3: Tension directed arbitrary

4.1.3 Case: payload connected to the ground through two cables

The ACTS consists of a point-mass payload connected to the ground through two cables and to an UAV. The enumeration is shown in Figure 4.4.

Payload position control

If the input is the desired payload position p^* , we find ourselves in three situations:




Figure 4.4: Payload connected through two cable to the ground

1. p^* lies precisely on the intersecting boundary arcs dictated by the maximum lengths of the ground cables;
2. p^* is out of reach;
3. p^* is inside the triangle A_1A_3P , resulting into slack cables

In the first case, p^* is used to compute the desired payload force F_p^* (Equation 4.11). Using the simplified payload balance equation related to the forces acting on the payload (Equation 3.16), we obtain the following.

$$F_{a,1}^* = F_p^* - \sum_{i=2}^n F_{a,i} \quad (4.14)$$

which brings us back to the previous case.

Because the payload is physically constrained at a boundary where both ground cables are stretched straight, any movement or external disturbance is perfectly resisted by the tension of the cables.

In the second case, since the ground cables physically block the payload from reaching p^* , a steady error $e = (p^* - p) \neq 0$ builds up. The actual tension will be directly proportional to the control gains and the distance of the unreachable input:

$$\sum F_{virtual} \propto (p^* - p_{geom}) \implies \sum F_{virtual} = K(p^* - p_{geom}) \quad (4.15)$$

where p_{geom} is the closest reachable point that lies on the workspace boundary. In this case, we may impose a controlled tension on the ground cables directed along $(p^* - p_{geom})$ to ensure the drone continues to pull toward the desired target:

$$F_{a,1}^* = F_p^* - \sum_{i=2}^n F_{a,i} + F_{virtual} \quad (4.16)$$

In the last case, the distance from the anchors to the payload is less than the cable length, resulting into slack cables as the latter cannot push. Mathematically $\tau_2 = 0$ and/or $\tau_3 = 0$. Then, $F_{a,1}^* = F_p^*$

Desired tension in the cable on the ground

The desired variable to control is the tension of one of the cables $F_{a,2} \rightarrow f^*$.

$$F_{a,1}^* = F_p^* - f^* - F_{a,2} \quad (4.17)$$

where $F_p = m_p(\ddot{p} + ge_3)$ and $F_{a,2} = \tau_2 u_2$.

Desired tension difference between the cables on the ground

The desired variable to control a linear combination of the two $F_{a,2} + \alpha F_{a,3} \rightarrow f^*$.

$$F_{a,1} = F_p - F_{a,2} - F_{a,3} \quad \Rightarrow \quad \begin{aligned} F_{a,1}^* &= F_p - (f^* - \alpha F_{a,3}^* + F_{a,3}^*) \\ &= F_p - f^* - (1 - \alpha)F_{a,3} \end{aligned} \quad (4.18)$$

For the specific case where $F_{a,2} - F_{a,3} \rightarrow f^*$:

$$F_{a,1}^* = F_p - f^* - 2F_{a,3}^* = F_p - f'^* \quad (4.19)$$

4.2 Extension to the Complete ACTS Architecture

At high level, the architecture that enables the system to reach the goal is shown in Figure 4.5.

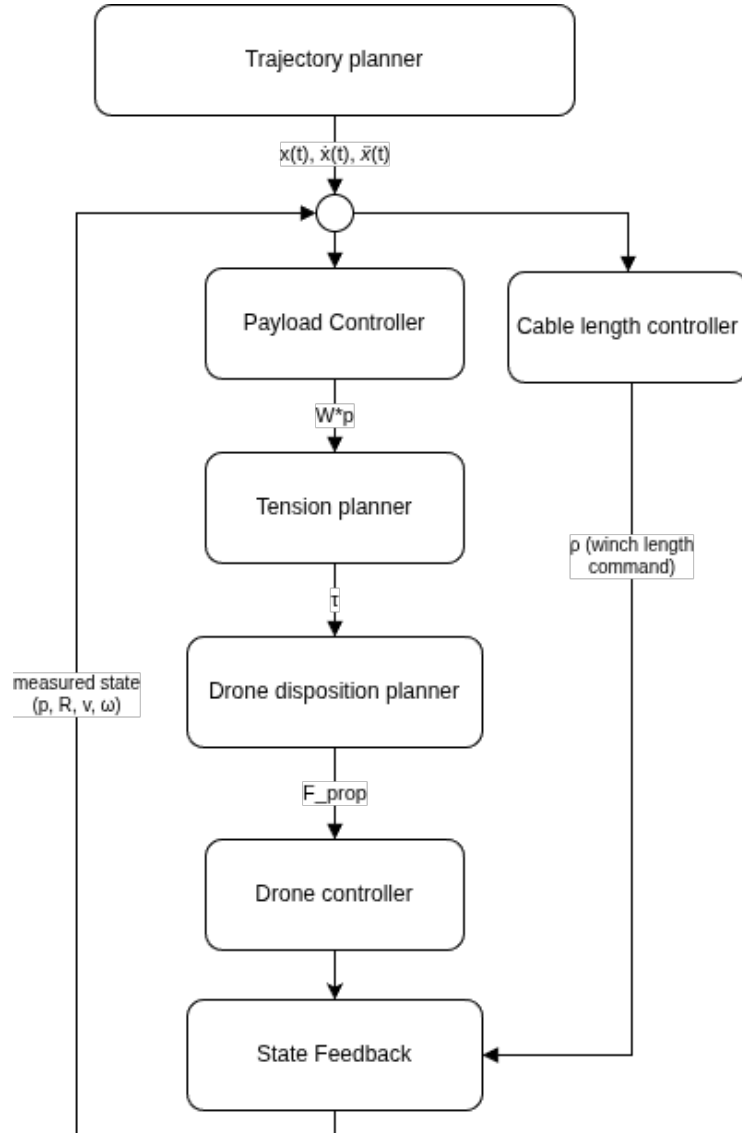


Figure 4.5: High level control scheme

Trajectory planner

The trajectory planner is able to compute the payload trajectory $x(t)$ and its velocity $\dot{x}(t)$ and acceleration $\ddot{x}(t)$ given the system's goal, such as:

1. Make the payload fly;
2. Bring the payload at the right height and orientation;
3. Approach the façade.

And/or the initial and final position of the payload.

Payload Controller

Then, the desired payload wrench W_p^* is computed for each point in the trajectory based on the previous state of the system. The desired payload wrench is computed from a geometric PD controller. The translational component is given by

$$F_p^* = m_p g + K_p(p^* - p) + K_d(\dot{p}^* - \dot{p}), \quad (4.20)$$

where p^* and p are the desired and current payload positions, respectively. For the rotational dynamics, the controller follows the geometric formulation on $SE(3)$ [20]. The attitude error and angular velocity error are defined as

$$\begin{aligned} e_R &= \frac{1}{2} (R^{*\top} R - R^\top R^*)^\vee \\ e_\Omega &= \Omega - R^\top R^* \Omega^* \end{aligned} \quad (4.21)$$

Where $(\cdot)^\vee$ denotes the inverse of the skew-symmetric (hat) operator. Since the controller performs set point regulation, the desired angular velocity is zero: $\Omega_d = \mathbf{0}$, yielding $e_\Omega = \Omega$. The desired control moment in the world frame is then

$$M_p^* = R(-K_R e_R - K_\Omega e_\Omega) \quad (4.22)$$

and the desired payload wrench becomes

$$W_p^* = \begin{bmatrix} F_p^* \\ M_p^* \end{bmatrix}. \quad (4.23)$$

Winch-Level Cable Length Controller

When transitioning the payload to a target pose along the planned trajectory, operational priority is given to the ground actuators due to their significantly higher mechanical stiffness and positioning precision compared to UAVs.

The ground subsystem is modeled as a 6-DOF Gough-Stewart parallel mechanism where the six ground cables act as active legs. Given the target payload position p^* and target orientation matrix R^* , the ideal length ρ_i^* for the i -th ground cable is defined geometrically by:

$$\rho_i^* = \|a_i - (p^* + R^{* \top} b_i)\| \quad (4.24)$$

To account for the finite velocity of the winch motors, the desired cable length is not applied instantaneously. Instead, the cable-length reference is updated incrementally at each control step according to

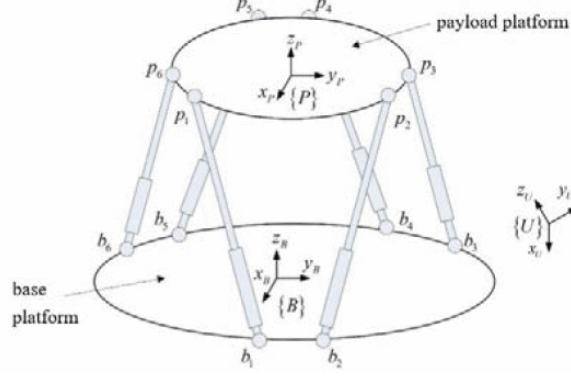


Figure 4.6: Gogh Stewart schematics [7]

$$\rho_i(t + \Delta t) = \rho_i(t) + \Delta \rho_i, \quad (4.25)$$

where the increment $\Delta \rho_i$ is limited such that $|\Delta \rho_i| = v_{\max} \Delta t$, with $v_{\max}$ being the maximum winch speed. The resulting cable-length reference is then sent to the actuator position controller. Consequently, the commanded cable length converges toward the desired value while respecting the physical velocity limits of the winch motors and avoiding unrealistically fast spool motions.

Tension planner

The tension planner is the layer responsible for guaranteeing that every cable stays taut throughout the motion. In fact, when working with ACTS, a payload wrench configuration is statically admissible if and only if there exists a set of strictly positive cable tensions ($\tau_i \geq \tau_{\min} > 0$) that balance the target operational wrench. This is due to the fact that cables can only pull and not push. Mathematically, this layout optimization is formulated as:

$$\begin{aligned} \min_{p_a} \quad & \sum_{i=1}^{n_a} \|F_{prop}(p_{a,i}, \tau_{optimal,i})\|^2 + K \|J_p \tau_{optimal} - W_p^*\|^2 \\ \text{subj. to} \quad & x_i^2 + y_i^2 + z_i^2 = l_i^2 \quad \forall i \in [1, n_a] \\ & \rho_{WCC}(\mathcal{U}) \leq 0 \\ & \rho_{IFC}(\mathcal{U}) \leq 0 \end{aligned} \quad (4.26)$$

Which is a Nonlinear optimization Problem (NLP) due to the Euclidean distance constraints.

This objective function aims to minimize the propulsion force of the drones while satisfying the wrench equilibrium equations on the payload. The parameter K acts as a penalty weight that prioritizes the tracking performance over energy efficiency; setting a high value (e.g., $K = 100$), heavily penalizes any mismatch between the generated wrench and the commanded target wrench W_p^* .

For whatever positions p_a , the cable tensions τ are determined by a second inner loop

$$\begin{aligned} \tau_{optimal} &= \arg \min_{\tau} \frac{1}{2} \tau^\top H \tau \\ \text{subj. to } & J_p^\top(\mathbf{u}) \tau = W_p^* \\ & \tau_{min,i} \leq \tau_i \leq \tau_{max,i} \quad \forall i \in [1, n_a + n_g] \end{aligned} \quad (4.27)$$

The lower bound $\tau_{min,i} > 0$ in the wrench feasible condition is what enforces the taut-cable requirement.

As the winch-level control drives $\rho \rightarrow \rho^*$, tracking the payload's motion toward its target pose, and $\mathbf{u} \rightarrow \mathbf{u}^*$, the achievable wrench set used by the tension planner is itself changing over the trajectory, since it depends on $\mathbf{u}$. As a consequence, $\mathbf{W}_p^*$ may be reachable at the target configuration but momentarily unreachable at the actual configuration, with all tensions kept strictly positive. When this occurs, Equation 4.27 should relax the equality constraint $\mathbf{J}_p^\top(\mathbf{u}) \tau = \mathbf{W}_p^*$ to a least-squares objective, while keeping $\tau_{min,i} > 0$ as a hard constraint.

$$\begin{aligned} \tau_{optimal} &= \arg \min_{\tau} \left(\frac{1}{2} \tau^\top H \tau + \gamma \|J_p^\top(\mathbf{u}) \tau - W_p^*\|^2 \right) \\ \text{subj. to } & \tau_{min,i} \leq \tau_i \leq \tau_{max,i} \quad \forall i \in [1, n_a + n_g] \end{aligned} \quad (4.28)$$

This guarantees that the tension planner always returns a taut solution, one that approximates the desired wrench as closely as the actual geometry allows, rather than returning no solution at all during the transient.

For the initial stage of development, this general QP is replaced by a simplified strategy: every cable tension is fixed at the minimum admissible value,

$$\|\tau_i^*\| = \tau_{min}, \quad \forall i \in [1, n_a + n_g]. \quad (4.29)$$

Drone disposition planner

Once the tension planner computes the scalar target tension magnitudes, the drones must dynamically adjust their orientation and propeller thrusts to impose these forces.

From the static equilibrium balance (Equation 3.13) the required propeller thrust vector is given by:

$$\mathbf{F}_{prop,i} = \mathbf{F}_{a,i} - \mathbf{F}_{g,i} = \mathbf{J}_{a,i}^\top \tau_i + m_i \mathbf{g} = T_i {}^0\mathbf{R}_i \mathbf{e}_3, \quad T_i = \|\mathbf{F}_{prop,i}\| \quad (4.30)$$

which is then handed to the attitude controller, responsible for aligning the body z -axis with the commanded thrust vector.

Simulation Environment and Experimental Setup

5.1 Role of Simulation in the Thesis

The development of the ACTS requires the interaction of several coupled mechanical and control components. A physics-based simulation environment is therefore used to evaluate the proposed architectures and control strategies before physical implementation.

Simulation provides a controlled environment in which the system can be tested under repeatable conditions. It also enables the evaluation of the controller without the risks and practical constraints associated with experiments on a physical system.

An additional advantage of using a physics engine is that the complete coupled equations of motion do not need to be explicitly derived and numerically integrated for each configuration. Instead, the mechanical bodies, joints, constraints, actuators, and contact properties are defined in the simulation model, while the physics engine performs the corresponding numerical integration. Nevertheless, the validity of the simulation remains dependent on the assumptions and simplifications made in the model.

5.2 Simulator Selection

Two simulation environments were investigated during the development of the thesis: Gazebo and MuJoCo. Gazebo was initially considered because of its integration with ROS2 and the availability of existing UAV models and visualization tools. However, difficulties were encountered when attempting to represent the closed cable-constrained structure of the ACTS. MuJoCo was therefore selected for the final simulation environment.

5.2.1 Gazebo Environment

Gazebo Harmonic [21] was initially selected as a potential simulation environment because of its established use in robotics and its integration with ROS2. However, the ACTS architecture presents a particular modeling challenge. Indeed, Gazebo assigns each physical element in the simulation a parent, generating a tree-like structure. While this does not constitute a problem for conventional articulated robot, ACTS contains ground cables constrained at both ends (resp. on the payload and on a point fixed on the ground), resulting in closed kinematic constraints.

Additionally, cables as soft body cannot be modelled in Gazebo, as it only manages rigid object. To go around the problem, they are modelled using multiple rigid links connected using universal joints. Although it solved the problem, implementing it resulted into an impracticable slow-down simulation.

Several preliminary simulations were nevertheless successfully implemented in Gazebo, including a pulley mechanism, a UAV connected to the ground through a cable, and a UAV connected to a payload. While individual components of the system could be simulated, such as pulley mechanism and single drone-cable simulation, extending this approach to the complete ACTS resulted in a more complex and computationally demanding model.

These experiments were useful for validating the initial modeling approach and identifying the main limitations before transitioning to another simulation environment.

Add photos

Given the additional modeling effort required to represent the complete ACTS architecture and the limited time available for the thesis, continuing the Gazebo implementation was not considered the most effective approach for obtaining the required simulation results.

5.2.2 MuJoCo Environment

MuJoCo (Multi-Joint dynamics with Contact) was selected as the final simulation environment because it is well suited to the closed-loop structure of cable-driven robots. In particular, MuJoCo provides tendon elements that can be used to represent cable-like connections between bodies, including constraints associated with their geometric configuration [22].

This capability significantly simplifies the representation of the ACTS compared with the rigid-link approximation investigated in Gazebo. The complete system can therefore be represented using the payload, UAVs, ground anchors, and cables while maintaining the closed-loop constraints required by the architecture.

For the simulations presented in this thesis, the cables are modeled as ideal geometric constraints. Their stiffness and damping are neglected, such that the cables transmit tensile forces without introducing additional elastic dynamics. This simplification is consistent with the quasi-static and geometric analysis used for the architecture evaluation, while allowing the simulation to focus on the influence of cable configuration, attachment geometry, and actuator placement.

5.3 Software architecture (UML)

All implementation code¹ is available on GitHub [23]. The repository is organized into three functional groupings:

- a `create_xml` package, an offline configuration and model-generation stage;
- an `acts_simulator` package, a runtime simulation stage;
- a `simulation_run` package, a mass-evaluation stage.

¹https://github.com/chiarabueno/acts_simulator.git

The `create_xml` package handles architecture search and MuJoCo model generation offline, producing XML files that are loaded at startup.

A visual interface (`xml_generator.py`) is also provided to build a custom XML model interactively, ready to be tested without going through the automated architecture search.

The resulting models can be run by two independent codes: `acts.py`, a single-model, single-pose driver used for qualitative verification; and `batch_run.py`, a headless driver that iterates over every candidate XML model and every target pose in a batch pose list.

Both codes are meaningful for different reasons. `acts.py` runs one simulation at a time with a live visual interface; this makes it slower, but well suited to the qualitative verification of the controller, which is what it was used for in the early stages of development. Each run saves a single indices row to `collected_data`, together with a video recording and live plots of the tracking performance. `batch_run.py` executes the same underlying pipeline without the visual interface, which makes it considerably faster over many configurations: it accumulates one results row per (model, pose) combination directly into `results.xlsx`. This is the driver used to collect performance data across architectures and poses, from which the conclusions of Chapter 6 are drawn. This overall process is summarized in Figure 5.1.

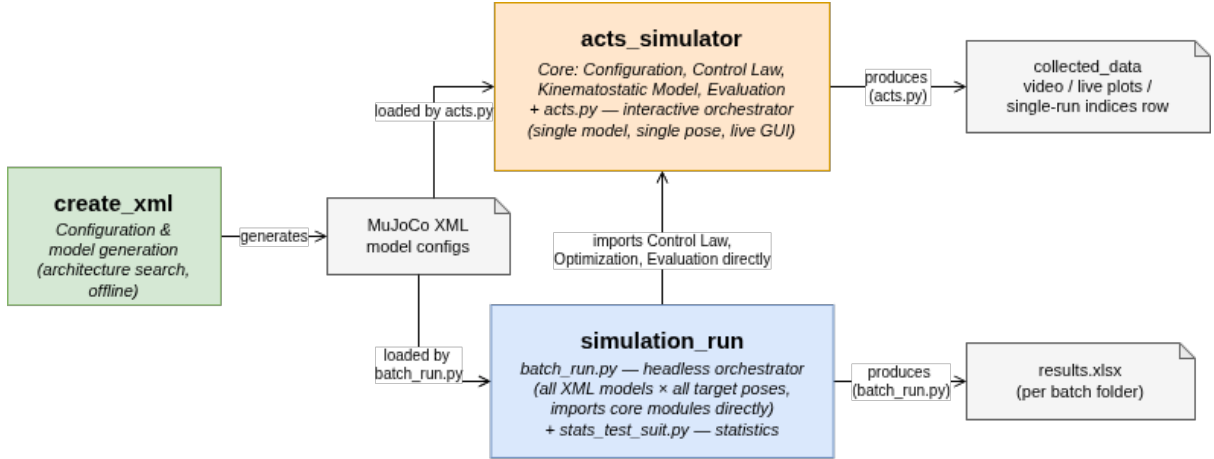


Figure 5.1: Architecture overview

Figure 5.2 details the internal organization of `acts_simulator`. `acts.py` runs the simulation, calling into three modules at each control step:

- the control-law layer (`utils_control.py`), which is described in Figure 5.3
- the kinemastatic/optimization layer (`utils_optimization.py`), which solves for the drone positions and cable tensions that best realize the desired payload wrench
- and the evaluation layer (`utils_performance_indices.py`), which compute the performance indices described in Section 3.3.2 and saves them to file.

The drone control-law layer introduced above is implemented as a small class hierarchy, as shown in Figure 5.3. In fact, a shared base class, `BaseDrone`, computes everything common to every configuration, such as the motor-mixing matrices, the attitude controller and the necessary rotor speeds. Each subclass replaces only `position_controller()`, providing the force law appropriate to what that drone is physically attached to.

The four subclasses correspond directly to the successive force-control cases developed in Chapter 4, and to the order in which the controller was actually developed and tested:

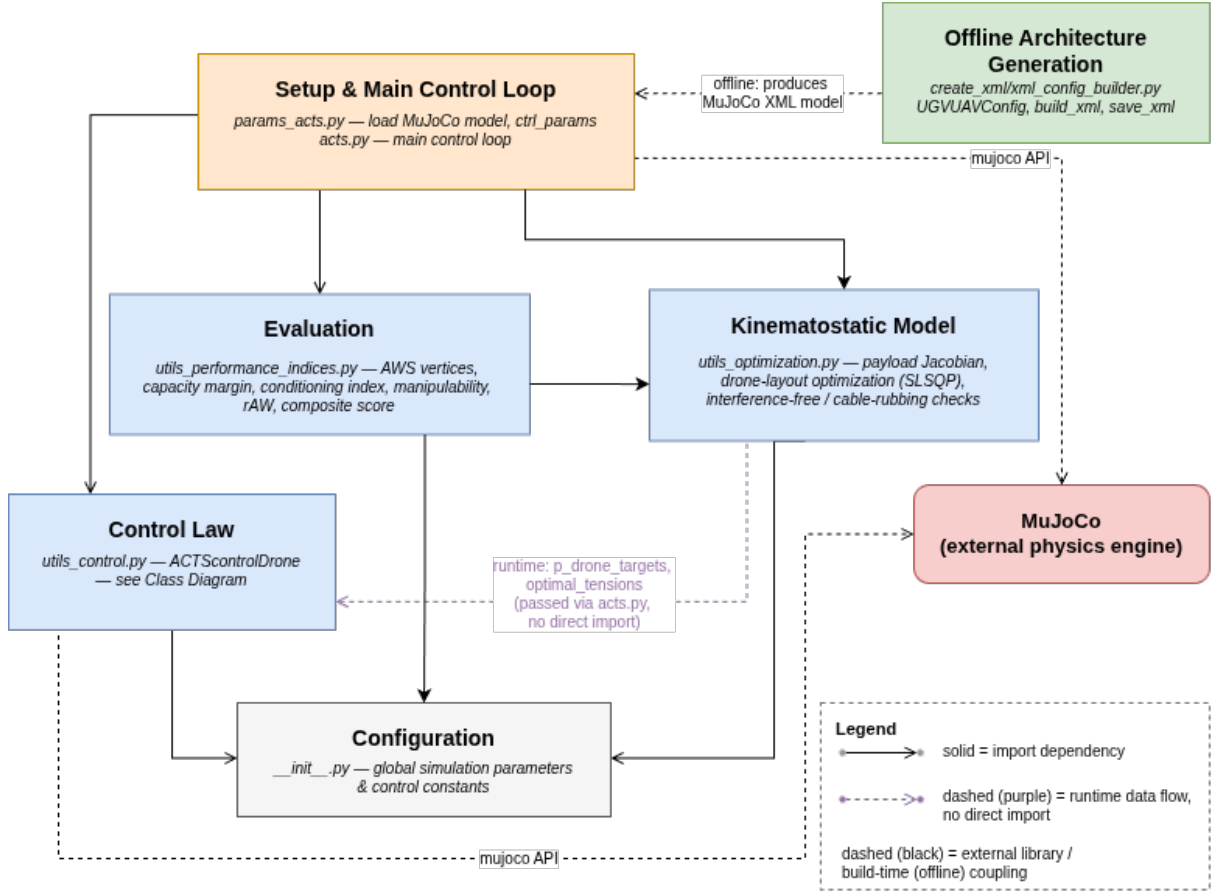


Figure 5.2: Package Diagram

- **FreeFlightDrone** implements the unconstrained case and was the first to be tested, to verify that a single drone could reach a desired position with no cable constraint at all;
- **CableTetheredDrone** extends this to a drone tethered directly to a fixed ground anchor by a cable described in Section 4.1.1
- **PayloadControlDrone** extends the cable case further to include a payload described in Section 4.1.2;
- **ACTScontrolDrone** is the controller ultimately used in the full ACTS architecture, driven directly by `acts.py`.

This progressive structure allowed each force-control case to be validated in isolation before being combined into the final system, and it keeps `position_controller()` as the single, well-defined extension point where a new case could be added without touching the shared attitude and motor-mixing logic.

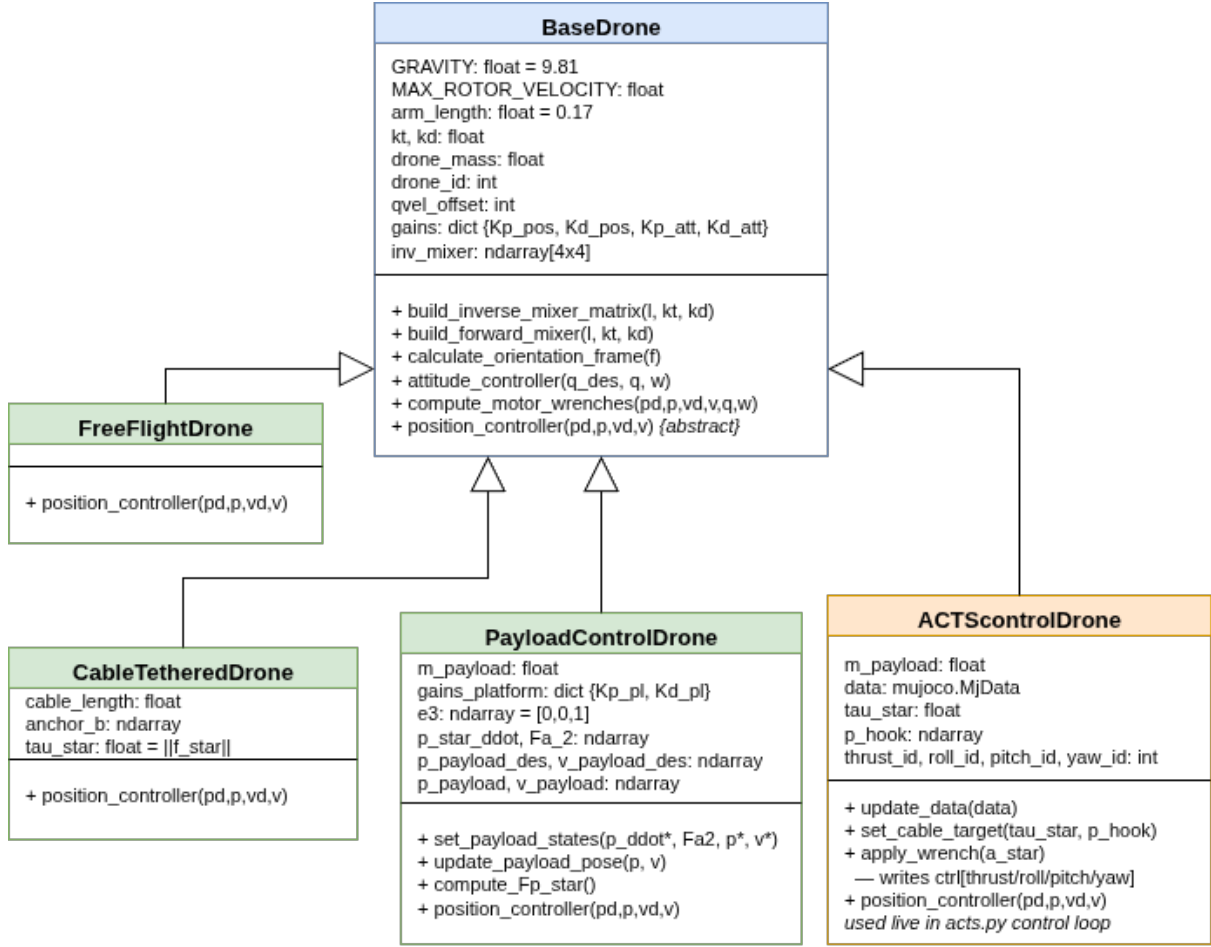


Figure 5.3: Drone Controller Class Diagram

5.4 Simulation setup

The simulations use the same payload, UAV model, cable properties, controller parameters, and numerical settings to ensure a fair comparison between different architectural configurations. These values are shown in Table 5.1. Additionally, the simulation time is equal to 0.002 seconds.

The architectural variables investigated in Chapter 6 are the ground-cable routing, ground-anchor placement, and UAV attachment geometry. At the start of the simulation, the payload is on the ground along with the drones, which are resting on its top surface.

5.5 Simulation methodology and evaluation framework

The geometric and static performance indices provided during the model generation stage, describe the instantaneous ability of a given architecture to generate payload wrenches and identify configurations that are close to kinematic singularities. However, these indices are evaluated under static or quasi-static assumptions and therefore cannot fully characterize the behavior of the closed-loop system during motion. In the latter case, cable directions, tensions and payload dynamics continuously evolve. Consequently, a

Simulation parameter	Value
Payload and initial conditions	
Payload mass	1 kg
Initial payload position	$[0.0, 0.0, 0.0]^\top$ m
Initial payload orientation	$\mathbb{I}$
Cable and winch parameters	
Minimum cable tension $\tau_{\min}$	5.5 N
Maximum cable tension $\tau_{\max}$	150 N
Maximum winch speed $v_{\text{winch},\max}$	1.5 m/s
UAV actuation parameters	
Maximum rotor velocity $\omega_{\max}$	1666 rad/s
Thrust coefficient k_t	5.5×10^{-6}
Drag coefficient k_d	3.299×10^{-7}
Minimum thrust $T_{\min}$	1.0 N
Maximum thrust $T_{\max}$	$4k_t\omega_{\max}^2$
Safety constraints	
Minimum UAV–UAV distance	0.4 m
Minimum cable–cable distance	0.05 m
Evaluation parameters	
Position tolerance	0.1 m
Orientation tolerance	3°

Table 5.1: Fixed parameters used in the numerical experiments.

configuration that appears favorable according to static indices may still exhibit oscillations, poor tracking or instability. Closed-loop simulation is therefore necessary to verify whether the theoretical advantages translate into practical performance.

The resulting analysis distinguishes between architectures that are favorable according to the analytical performance indices and those that provide favorable closed-loop behavior in simulation.

Simulation results

The objective of this chapter is to evaluate how the architectural design of an ACTS influences its ability to accurately and robustly manipulate a payload. The focus is on how different cable routing strategies, UAV attachment configurations, and ground hook placements influence the overall system performance.

In fact, a configuration is considered successful if the desired payload is reached with sufficiently small position and orientation errors, all cables remain under positive tension throughout the maneuver, and the payload converges to an equilibrium without persistent oscillations.

First, the classical Stewart configuration is analyzed and used as a reference architecture due to its geometric symmetry and extensive use in the literature. In fact, if even Stewart-like performs poorly, the problem is likely the controller rather than the architecture.

Two desired payload poses are taken in considerations. In the first scenario, the desired payload orientation coincides with the world reference frame; while in the other scenario a non-zero desired orientation is imposed. This allows to analyze separately the rotational motions from the translation tracking.

The remaining experiments then investigate how modifications to the ground cable routing, UAV attachment geometry, and hook placement affect both the theoretical performance indices and the closed-loop behavior of the system. This progressive analysis makes it possible to identify which geometric features have the greatest influence on payload manipulation performance.

6.1 Stewart platform baseline

The Stewart platform configuration is used as a baseline for evaluating the proposed ACTS architectures. Its symmetric arrangement of the six ground cables provides a well-defined reference configuration against which alternative cable routings can be compared. The baseline is first examined using the static performance indices introduced in Section 3.3.2.

In particular, the conditioning index, manipulability, radius of available wrench, capacity margin, and composite score are evaluated at the prescribed payload pose. These quantities provide a reference for assessing the wrench-generation capability and isotropy of the ground-cable arrangement. The complete ACTS configuration is then evaluated by incorporating the aerial cables and their actuation constraints. Finally, the resulting configuration is simulated in MuJoCo to verify the dynamic payload tracking behavior.

6.1.1 Numerical Verification of the Baseline Configuration

This section verifies that the implemented optimization and control algorithms correctly reproduce the mathematical model derived in Chapters 3. For one representative Stewart-platform configuration, each stage of the computation is independently reconstructed from the governing equations: cable directions are computed from the geometry, the resulting Jacobian is assembled, cable tensions are substituted to recover the payload wrench, and the required UAV thrust is recomputed from the static equilibrium equations. Agreement between these hand calculations and the implementation provides confidence that subsequent comparisons between ACTS architectures reflect architectural differences rather than implementation errors.

Configuration

Payload dimensions: $2.0 \times 2.0 \times 0.2$ m

Desired pose: $p^* = [0.5, -0.5, 2.0]^\top$ m

Desired orientation: $R^* = \mathbb{I}$

Desired payload wrench: $W_p^* = [0, 0, 9.81, 0, 0, 0]^\top$

attachment		hook points	
$A_4 \equiv A_5$	$[0.0, 1.1, 0.0]^\top$	$B_4 \equiv B_9$	$[0.5, 0.05, 1.9]^\top$
$A_6 \equiv A_7$	$[-0.9526, -0.55, 0.0]^\top$	$B_5 \equiv B_6$	$[-0.0237, -0.775, 1.9]^\top$
$A_8 \equiv A_9$	$[0.9526, -0.55, 0.0]^\top$	$B_7 \equiv B_8$	$[0.9763, -0.775, 1.9]^\top$

Table 6.1: Ground anchor and hook attachment points for the Stewart baseline.

Using Equation 3.6b, the ground cable directions u_i are:

$$\begin{aligned}
 u_4 &= [-0.2245, 0.4713, -0.8529]^\top & u_7 &= [-0.7100, 0.0828, -0.6993]^\top \\
 u_5 &= [-0.0089, 0.7024, -0.7117]^\top & u_8 &= [-0.0124, 0.1176, -0.9930]^\top \\
 u_6 &= [-0.4545, 0.1047, -0.8846]^\top & u_9 &= [0.2215, -0.2937, -0.9299]^\top
 \end{aligned}$$

Table 6.2: Ground cable unit directions.

$$J_{p,\text{ground}} = \begin{bmatrix} -0.22445 & 0.47135 & -0.85291 & -0.42197 & 0.02245 & 0.12345 \\ -0.00888 & 0.70238 & -0.71175 & 0.26597 & -0.33812 & 0.33656 \\ -0.45452 & 0.10475 & -0.88456 & 0.25373 & -0.37586 & 0.29632 \\ -0.70998 & 0.08282 & -0.69934 & 0.20060 & 0.40409 & -0.52834 \\ -0.01239 & 0.11759 & -0.99298 & 0.28483 & 0.47420 & -0.47636 \\ 0.22151 & -0.29365 & -0.92989 & -0.54081 & -0.02215 & -0.12183 \end{bmatrix} \quad (6.1)$$

Drone Attachment Geometry

Unlike the ground anchors, the drone attachment points a_1, a_2, a_3 are not fixed geometry — they are the output of the layout optimization of Section 4.2. The corresponding cable directions u_1, u_2, u_3 are therefore extracted from a converged simulation run for this configuration rather than computed from known attachment coordinates:

$$a_1 = [1.1020, -0.2692, 3.5972]^\top, \quad a_2 = [0.1802, -0.7553, 3.4976]^\top, \quad a_3 = [0.9397, -1.2760, 3.5192]^\top. \quad (6.2)$$

With $r_i = p^* + R^* {}^p b_i$ and the drone hook offsets ${}^p b_i$, the resulting drone cable directions are

$$u_1 = [0.0837, -0.0294, 0.9961]^\top, \quad u_2 = [0.1042, -0.3528, 0.9299]^\top, \quad u_3 = [0.2926, -0.1504, 0.9443]^\top, \quad (6.3)$$

with $\|a_i - r_i\| \approx 1.503$ m for all three, consistent with the nominal drone cable length of 1.5 m and confirming the optimizer converged to a geometrically taut solution. The corresponding drone Jacobian is

$$J_{p,\text{drones}} = \begin{bmatrix} 0.0837 & 0.1042 & 0.2926 \\ -0.0294 & -0.3528 & -0.1504 \\ 0.9961 & 0.9299 & 0.9443 \\ 0.2769 & 0.2910 & -0.5043 \\ -0.4661 & 0.4533 & 0.0293 \\ -0.0370 & 0.1394 & 0.1609 \end{bmatrix}. \quad (6.4)$$

Cable Tensions

For this configuration, the optimizer returns

$$\tau_{\text{UAV}} = [13.6970, 11.1548, 14.4154]^\top \text{ N}, \quad \tau_{\text{ground}} = [5.4903, 5.4740, 5.4901, 5.4784, 5.4860, 5.4708]^\top \text{ N} \quad (6.5)$$

All six ground tensions lie close to $\tau_{\min} = 5.5$ N. This behavior is physically expected. Because the desired wrench is almost entirely vertical, the UAVs provide most of the lifting force while the Stewart cables primarily stabilize the payload orientation and prevent lateral motion. Consequently, the optimizer drives the ground tensions toward their minimum admissible values, maintaining taut cables while minimizing unnecessary internal forces.

Payload Wrench Verification

Combining $J_{p,\text{drones}}$ and $J_{p,\text{ground}}$ into the full Jacobian J_p and evaluating $W_p = J_p \tau$ with the tensions above:

$$W_p = J_p \tau = \begin{bmatrix} -0.0023 \\ 0.0018 \\ 9.8110 \\ -0.0003 \\ -0.0001 \\ -0.0009 \end{bmatrix}, \quad W_p^* = \begin{bmatrix} -0.0158 \\ 0.0180 \\ 9.7341 \\ -0.0022 \\ 0.0019 \\ -0.0151 \end{bmatrix}. \quad (6.6)$$

All six components match to within 0.08 in force units and 0.015 in moment units. This residual is expected rather than an error: with `MODE = "tau_optimal"`, tensions are found by a bounded least-squares solve (Eq. 4.27) that *penalizes* wrench mismatch rather than enforcing $J_p^\top \tau = W_p^*$ as a hard equality constraint, so a small, non-zero residual is the expected outcome of the optimization rather than a sign of implementation error.

Required Drone Thrust

Under the steady-state assumption $p_d = p$, $\dot{p}_d = \dot{p} = 0$, Eq. 4.30 reduces to $F_{\text{prop},i} = \tau_i u_i + m_i g e_3$, giving the hand-computed thrust magnitudes

$$T_1 = 33.29 \text{ N}, \quad T_2 = 30.27 \text{ N}, \quad T_3 = 33.57 \text{ N}. \quad (6.7)$$

The controller-computed thrust commands for the same converged pose are 33.2793, 30.2683, and 33.5657 N respectively, matching the hand-computed values to within floating-point precision and confirming that `compute_motor_wrenches` correctly implements Eq. 4.30.

Discussion

Both checks confirm the implementation is correct, at two different tolerances appropriate to what each is verifying. The thrust-command comparison, which involves no optimization step, matches to floating-point precision, confirming that the geometric force-to-thrust mapping in the drone controller (Eq. 4.30) is implemented exactly as derived. The wrench-tracking comparison shows a small, non-zero residual, which is the expected signature of the tension planner’s least-squares formulation (Eq. 4.27) rather than an error: the optimizer trades a small wrench-tracking residual for reduced drone propulsion effort, weighted by K in the objective of Eq. 4.27. Together, these results validate both the geometric optimization and the low-level control implementation for this representative configuration, providing the basis for the comparative architecture study that follows.

6.1.2 Comparison between tension allocation strategies

As mentioned in Section 4.2, we evaluate two distinct tension allocation strategies:

- Minimal tension strategy, in which a minimum cable tension is imposed to each cable tension such that $\|\tau_i\| = \tau_{min}$.
- Optimal tension strategy, in which cable tensions are determined by the quadratic optimization problem in Equation 4.28

The performance indices and tracking errors under both strategies across two operational scenarios are summarized in Table 6.3.

The minimal tension strategy has negative consequences on the system’s robustness. By locking all cable tensions to their absolute lowest limit (τ_{min}), the range of available tension choices shrinks to a single point. As a result, the controller loses its ability to adjust forces, reducing the payload’s Available Wrench Set (AWS) to just a single fixed outcome. [24] As a result, any deviation of the desired payload wrench W_p^* from this single point results in a negative capacity margin (as seen in Scenario A where $\gamma = -0.19343$). This indicates that the system is theoretically incapable of resisting external disturbances or maintaining equilibrium without violating the tension constraints.

Switching to the optimal tension allocation, allows the cable tensions to vary dynamically between τ_{min} and τ_{max} . As a result, the radius of the Available Wrench increases and the capacity margin takes on a positive value ($\gamma = 10.46403$). Thus, also the composite score increases. Differently, changing the tension allocation algorithm has no effect on the conditioning index or manipulability because they are kinematic metrics that only depend on the platform’s geometric position.

On the other hand, it is worth to notice that, since the objective function does not contain any state-tracking terms, this optimizer does not directly minimize the payload’s real-time position or orientation tracking errors. Because of this, a spatial configuration that yields globally minimal propulsion effort does not guarantee a minimum in tracking error.

Metric / Parameter	Scenario A		Scenario B	
	$\tau_{\min}$	τ_{opt}	$\tau_{\min}$	τ_{opt}
Desired Position	$[0.5, -0.5, 2.0]^\top$		$[0.5, -0.5, 2.0]^\top$	
Desired Orientation	$[1.0, 0.0, 0.0, 0.0]^\top$		$[1.0, 0.1, -0.1, 0.1]^\top$	
Conditioning Index	0.10259	0.09617	0.07052	0.05550
Manipulability	0.47775	0.43700	0.31471	0.24108
Radius Avail. Wrench	49.29711	47.90399	52.21278	53.22707
Capacity Margin	-0.19343	10.46403	-3.83256	2.65386
Worst-case CM	0.90998	0.76401	0.90998	0.75072
Composite Score	17.35180	20.62849	17.64446	19.42488
Position Error	0.00201	0.00284	0.00187	0.00262
Orientation Error	0.00121	0.00209	0.00379	0.00385

Table 6.3: Comparative performance indices and tracking errors for Stewart baseline configuration across Scenarios A and B.

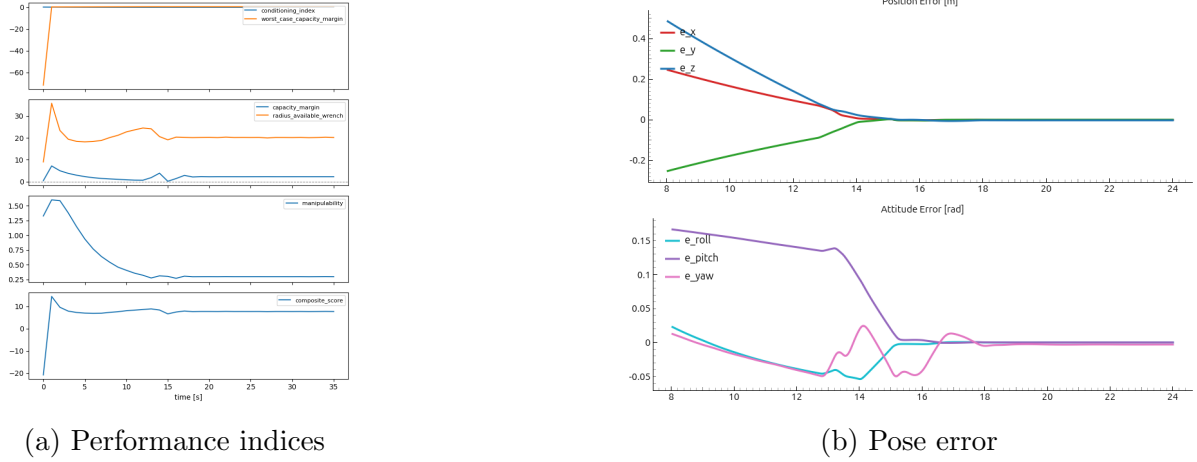


Figure 6.1: Graphs

Although the Stewart configuration exhibits good overall performance and provides an excellent reference architecture, the proposed ACTS differs from a classical Stewart platform because the UAV cables can be connected to the payload in several different ways. Moreover, different ground cable routings may further improve specific performance aspects such as stability, wrench generation capability, or robustness. For these reasons, the Stewart configuration is adopted as a baseline against which all alternative architectures are compared.

An ideal ACTS architecture should remain far from singular configurations, generate payload wrenches efficiently in every direction, and maintain sufficient redundancy to accommodate disturbances while respecting cable tension limits. Consequently, all the considered performance indices should be as big as possible.

The considerations from now on will be done using the optimal tension strategy.

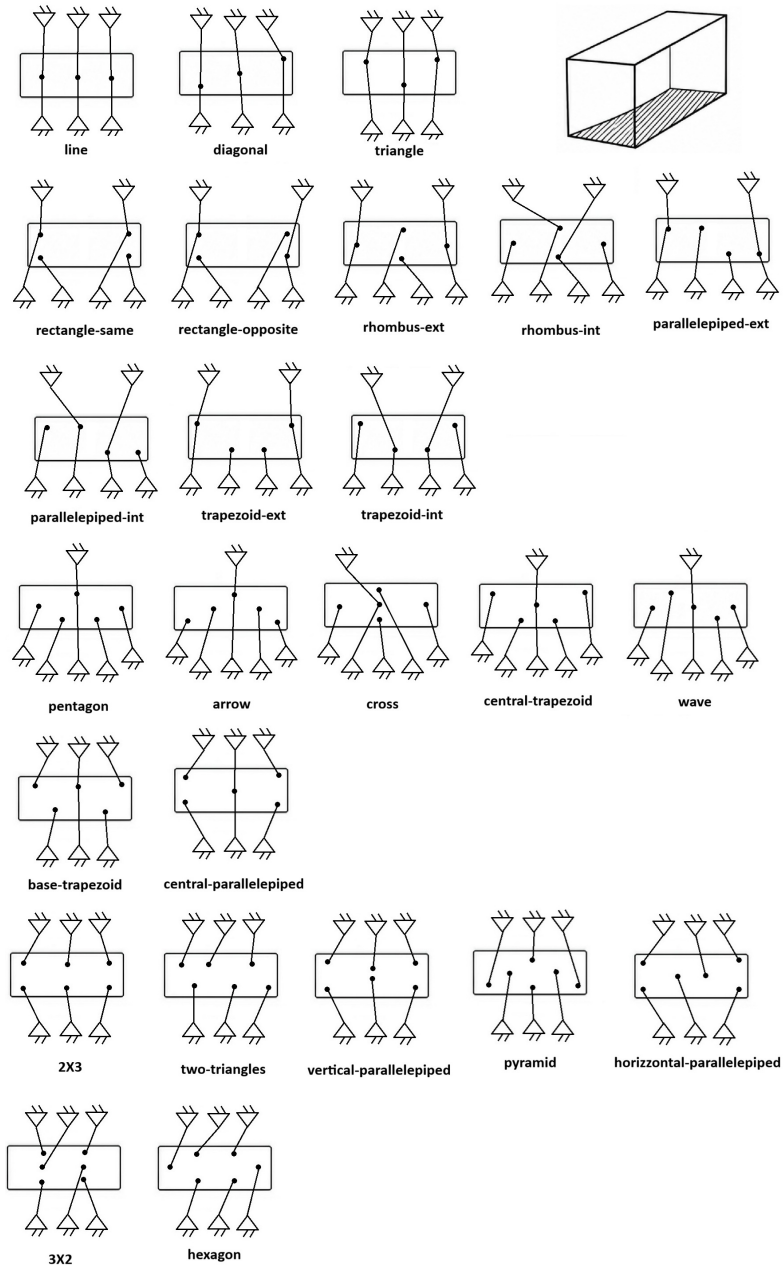


Figure 6.2: Possible 6 UGVs connections

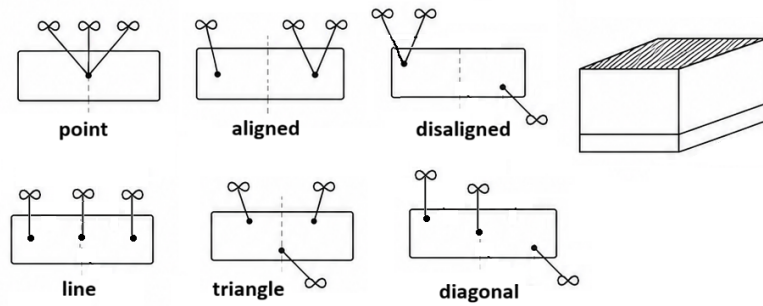


Figure 6.3: Possible 3 UAVs connection with one cable

6.2 Statistic tests

Adjust this

The performance of each robot configuration was evaluated using a set of primary and diagnostic metrics extracted from the simulation results. These metrics were selected to assess not only the overall task success but also the quality, robustness, and physical feasibility of each configuration.

Because every robot configuration was evaluated on the same set of target poses, the resulting data constitute a repeated-measures design.

Continuous metrics were compared across configurations using the Friedman test, while binary metrics were analysed using Cochran’s Q test, both of which are appropriate for repeated, non-independent observations. To control the family-wise error rate across multiple performance metrics, the resulting omnibus p-values were adjusted using the Benjamini-Hochberg False Discovery Rate (BH-FDR) procedure. For metrics exhibiting a statistically significant omnibus result, post-hoc comparisons were performed against the reference configuration. Continuous variables were analysed using paired Wilcoxon signed-rank tests, whereas binary variables were analysed using McNemar’s exact test. Holm’s correction was applied to all pairwise comparisons to account for multiple testing.

The Friedman test was selected because each robot configuration was evaluated on the same set of target poses, resulting in repeated, paired observations.

Cochran’s Q test - repeated binary outcomes. Wilcoxon signed-rank test - post-hoc pairwise comparison for paired continuous data. McNemar’s exact test - post-hoc comparison for paired binary outcomes. Benjamini-Hochberg FDR - controls the expected proportion of false discoveries across multiple omnibus tests. Holm correction - controls the family-wise error rate for pairwise comparisons.

Throughout the analysis, statistical significance was assessed using a significance level of ($\alpha = 0.05$).

6.3 Ground cable routing

Once the controller has been validated using the Stewart baseline, we can proceed to consider different ways to connect six ground cables to the platform (Figure 6.2) and the drone (Figure 6.3). The same ground configuration hook-anchor can change the system’s stability based on which hook is connected to which anchor point on the ground. Therefore, we will start considering the drone attachment configuration as fixed to the triangular arrangement and vary only the routing of the six ground cables. This specific UAV configuration is chosen because it provides a symmetric distribution of the three drones around the payload. This approach allows one to isolate the influence of the ground cable routing and attribute differences in performance solely to the ground architecture. Finally, in Section 6.5, the impact of various UAV attachment geometries is examined independently.

Focusing on the ground cable routing, there are at most $6! = 720$ physically distinct valid ways to route the six ground cables. Scoring an architecture using only one arbitrarily chosen routing raise the question on how lucky the routing choice was and how good the architecture actually is. Therefore, implementing the selection strategy explained in Section 3.3.3 is essential to make a guided choice and conclusions on the results.

Ground screening

The pre-screening results are shown in Table 6.4 and Table 6.5, where ground cable routings were evaluated over 10 different poses.

A routing is discarded as soon as it violates either WCC or IFC at any tested pose (see Section 3.3.3). For this reason, the WCC and IFC counts in Table 6.4 reflect per-routing failures, whereas the WFC count is not directly comparable, since it represents the total number of pose-level failures accumulated across all candidate routings. The dominant source of rejection is the WFC, indicating that many routings remain kinematically valid but cannot generate the required wrench while maintaining admissible cable tensions. WCC failures are comparatively limited, showing that rank deficiency is less common than tension infeasibility. IFC failures are exclusively caused by cable-cable interference, whereas no exit-angle violations were observed.

The quality of the selected routing is evaluated through four complementary metrics. The smallest singular value, $\sigma_{\min}$, measures the distance from singular configurations, while the conditioning index ν evaluates the isotropy of the wrench generation capability. Manipulability quantifies the overall size of the achievable wrench space, whereas $d_{\min}$ characterizes the minimum cable-to-cable clearance over all tested poses.

Table 6.5 shows how no single architecture simultaneously maximizes every performance metric. The two-triangles configuration provides the largest minimum singular value and the best conditioning index, indicating the greatest robustness against singular configurations. Conversely, the rectangle-opposite architecture achieves the highest manipulability, suggesting a larger overall wrench capability. Finally, the parallelepiped-int layout provides the largest minimum cable clearance, reducing the likelihood of cable interference. These results highlight the trade-off between kinematic robustness, wrench capability, and geometric clearance.

Layout (Payload – Ground)	WCC Failures	WFC Failures	IFC Failures	Feasible
two-triangles – vertical-parallelepiped	64	2538	507	✓
rectangle-opposite – 2X3	72	146	94	✓
parallelepiped-int – 2X3	52	340	102	✓
parallelepiped-ext – horizontal-parallelepiped	24	630	116	✓
central-trapezoid – horizontal-parallelepiped	16	1186	255	✓

Table 6.4: Pre-screening feasibility of cable-routing architectures

Talk about triangle-triangle combination why it does not pass the pre-screening?

Notice something very odd. It never even reached WCC/WFC/IFC failures. This suggests the algorithm never found a routing to evaluate, or the architecture was rejected before the screening loop. That is not something you can conclude from the tables.

I would first verify the code. If it is indeed skipped because: payload layout equals ground layout, or there are only six identical permutations, then discuss that.

Overall, the pre-screening substantially reduces the number of candidate routings while preserving at least one feasible solution for every payload–ground architecture. The results also demonstrate that different routing choices can significantly affect the kinematic quality of the same geometric layout. Consequently, the routing-selection strategy

Layout (Payload – Ground)	$\sigma_{\min}^a$	ν^b	w^c	$d_{\min}^d$
two-triangles – vertical-parallelepiped	0.1911	0.0797	0.0450	0.0638
rectangle-opposite – 2X3	0.1875	0.0786	0.0957	0.2027
parallelepiped-int – 2X3	0.1892	0.0784	0.0344	0.3213
parallelepiped-ext – horizontal-parallelepiped	0.1825	0.0750	0.0302	0.1921
central-trapezoid – horizontal-parallelepiped	0.1676	0.0696	0.0290	0.1452

Table 6.5: Best routing quality across feasible architectures

^a $\sigma_{\min}$ = smallest singular value of the payload Jacobian.

^b ν = conditioning index (Eq. 3.25)

^c w = manipulability (Eq. 3.26)

^d $d_{\min}$ = minimum cable-to-cable clearance of the selected routing over all tested poses.

is an essential preprocessing step before comparing the dynamic performance of the different cable robot architectures in the following sections.

Simulation run

The theoretical indices evaluate the geometric and static properties of a cable routing. They identify configurations that are close to kinematic or wrench singularities and rank architectures according to their ability to generate payload wrenches. However, they cannot predict the transient response of the closed-loop system. Dynamic effects such as payload inertia, controller gains and load redistribution are only captured by simulation. Consequently, while poor theoretical indices almost always indicate poor dynamic performance, the opposite is not necessarily true: a routing with good static indices may still exhibit oscillations or poor tracking.

For each configuration derived in the previous step, a simulation is run over 60 different poses (shown in Figure 6.4) and conclusions are drawn. Additionally, extra simulations have been run to test specific ground cable routing and see if they lead us to further conclusions.

In Table 6.6 are shown the metrics obtained from the statistic tests explained in Section 6.2. For all the metrics, the best rank is associated to 1, while the worst is at 5. However, while for metrics like "cable rubbed" and "instability" rank 1 corresponds to the lower value, for the others is the higher.

Adapt with new results

What does the table tells us about?

How the results before simulation and after simulation differ?

Supplementary simulations have been run on configurations realized manually, rather than selected through a systematic search.

Does this give us additional results?

The exhaustive screening consistently rejects the line and diagonal ground-routing configurations. This result is expected, as in these layouts several cable directions become nearly coplanar or aligned, resulting in cable arrangements that are close to kinematic singularities. Consequently, the cable system can no longer generate a full six-dimensional wrench space. This result could have also been explained geometrically. In the line configuration, cable attachments lie along a single axis, which limits the system's ability

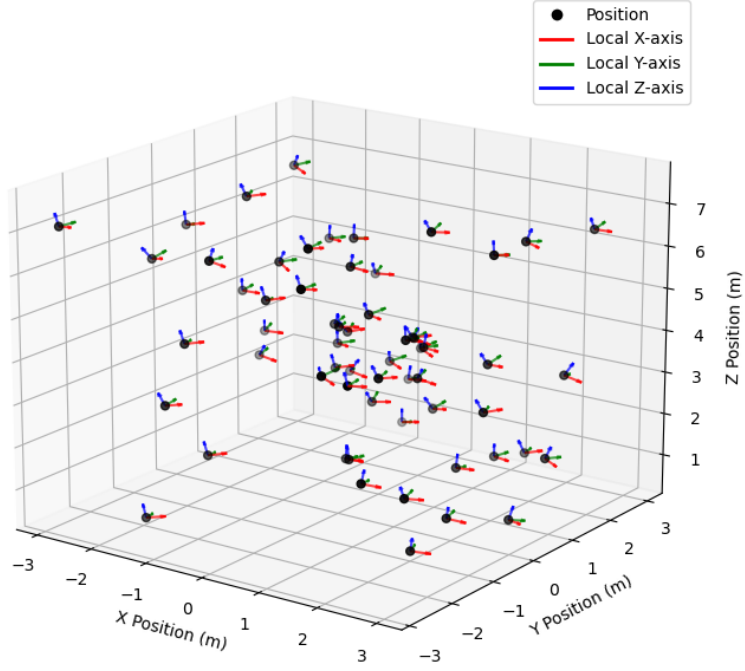


Figure 6.4: Testing poses

Architecture	ν	w	N	Pose Reach	Cable Rub	Instab.
pentagon-rect-same	0.0869 (5)	0.3522 (4)	6.4366 (1)	0.8333 (1)	0.6500 (3)	0.0000 (1)
2X3-rect-same	0.1135 (2)	0.7820 (1)	6.3929 (2)	0.5833 (5)	0.6167 (2)	0.0500 (3)
2triangles-2X3	0.1140 (1)	0.5953 (2)	6.2580 (3)	0.6667 (3)	0.7667 (4)	0.1333 (5)
2triangles-vert-parall	0.1107 (3)	0.4907 (3)	5.9310 (4)	0.6667 (3)	0.9167 (5)	0.0667 (4)
2triangles-pentagon	0.0950 (4)	0.3520 (5)	5.8146 (5)	0.7000 (2)	0.5500 (1)	0.0167 (2)

Table 6.6: Static and dynamic performance indices for the five candidate architectures, with rank (1 = best, 5 = worst) shown in parentheses.

ν = conditioning index; w = manipulability; N = composite score;

Pose Reach = fraction of trials reaching the target pose (identical to `orientation_reached` in this dataset);

Cable Rub = fraction of trials with cable rubbing;

Instab. = `simulation_unstable` rate.

Architecture	ν	w	N	Pose Reach	Cable Rub	Instab.
rect-same-rect-opposite	0.1077 (2)	9.1356 (1)	9.1356 (1)	0.6167 (5)	1.0000 (4)	0.2500 (3)
2X3-rect-same	0.1226 (1)	8.5115 (2)	8.5115 (2)	0.7000 (3)	1.0000 (4)	0.4833 (5)
horiz-parall.-horiz-parall.-3	0.0647 (3)	6.6252 (3)	6.6252 (3)	0.7833 (1)	0.4000 (1)	0.0667 (1)
horiz-parall.-horiz-parall.	0.0645 (4)	6.5651 (4)	6.5651 (4)	0.7167 (2)	1.0000 (4)	0.2500 (3)
rect-opposite-2X3-2	0.1126 (5)	6.4080 (5)	6.4080 (5)	0.5667 (4)	1.0000 (4)	0.1667 (2)

Table 6.7: Top five manual architectures

to generate forces and torques in directions perpendicular to that line. Similarly, the diagonal configuration introduces a strong directional bias along the axis on which the cable attachments are positioned.

Simulation results using hand-crafted configurations confirm this conclusion: line-based and diagonal-based ground cable layouts never rank among the highest-performing architectures in terms of composite score. The drop in performance becomes particularly pronounced when both the payload and the ground attachments are arranged in a one-dimensional configuration. In such cases, the desired pose is achieved less than half the time, like in the LINE-LINE-TRIANGLE configuration that succeeds only 40% of the time. Success rates nearly double when at least one attachment expands into two dimensions, as seen in LINE-PENTAGON-TRIANGLE (56.67%) or LINE-HEXAGON-TRIANGLE (76.67%).

two-triangles-vertical-parallelepiped

two-triangles has the largest σ_{min} , it also has the largest conditioning index, but it has lower manipulability than rectangle-opposite.

This is nice because it illustrates that: manipulability measures the overall volume of the wrench ellipsoid, whereas σ_{min} measures the worst-case direction.

So an architecture can have: slightly smaller manipulability, but a larger σ_{min} , meaning it is more isotropic and farther from singularity, even if its total wrench capability is not maximal.

Other combinations that give interesting results?

6.4 Ground anchor placement

The influence of the ground-anchor footprint was evaluated by comparing three geometrically similar datasets in which the ground attachment locations were uniformly scaled while preserving the same cable-routing topologies. The comparison was restricted to the triangle-UAV configurations to isolate the effect of anchor placement from that of cable routing.

Increasing the distance between the ground anchors is expected to improve the robot's mechanical performance. A larger anchor footprint increases the moment arm between the payload and the cable attachment points, allowing the cables to generate larger restoring moments and a wider achievable wrench set. Consequently, higher wrench quality, better conditioning, and improved tracking performance are expected.

The complete numerical results for all evaluated metrics, workspace sizes, and platform configurations are reported in Appendix C. Tables C.1 and C.2 provide the complete metric values together with the statistical significance of each comparison relative to the reference `acts_stewart` configuration.

6.4.1 Results with reduced anchor spread

Reducing the anchor spacing consistently degrades the performance of all alternative architectures. Static performance indicators, including the capacity margin, manipulability, radius of available force, and conditioning index, decrease across almost every configuration. Likewise, cable rubbing becomes more frequent as the anchors are brought closer

together, indicating that the cable directions become increasingly parallel and clearance between neighbouring cables is reduced.

The effect is particularly evident in the task-level metrics. The pose reached metric shows the clearest deterioration: whereas the reference Stewart configuration successfully reaches 65% of the target poses, all compressed alternatives achieve only 35-60%. This difference is statistically significant ($p = 0.0001$) and is reflected in the number of unreached poses, which increases from 10/60 in the nominal dataset to 15/60 in the reduced-scale dataset.

write tables? Is it even worst than the worst of the small?

Among the evaluated layouts, the compact **small13X2-2X3-TRIANGLE** configuration performs worst, obtaining the lowest composite score within the triangle-UAV subset together with one of the smallest available-force radii. These results indicate that reducing the ground-anchor footprint substantially limits both the feasible wrench space and the achievable workspace.

6.4.2 Results with increased anchor spread

Increasing the anchor spacing produces the opposite trend. Every static performance metric improves, with higher capacity margins, larger radii of available force, better conditioning indices, and increased manipulability across all evaluated architectures. Position and orientation tracking errors also decrease for nearly every routing, demonstrating that the improved static properties translate into better closed-loop performance.

The wider anchor footprint also improves task completion. Only three of the sixty target poses remain unreachable, compared with ten in the nominal configuration and fifteen in the reduced-scale configuration. Interestingly, the overall difference in pose completion between routing topologies is no longer statistically significant ($p = 0.069$). This suggests that, once the anchor spread is sufficiently large, the system operates well within its feasible wrench region and the choice of cable routing becomes considerably less critical.

One notable exception is the **CENTRAL-TRAPEZOID-HORIZONTAL-PARALLELEPIPED** routing, which exhibits increased position and orientation errors despite improvements in all static indices. This behaviour mirrors the discrepancy between static performance measures and dynamic tracking discussed previously, indicating that favourable wrench metrics alone do not necessarily guarantee improved closed-loop accuracy.

Is it even better than the better one?

The best overall performance is obtained by the **HEXAGON-HEXAGON-TRIANGLE** configuration, whose large anchor footprint achieves the highest composite score and capacity margin among all evaluated triangle-UAV layouts.

6.4.3 Considerations on the anchor spacing

The experimental results consistently support selecting the largest feasible ground-anchor footprint. Compared with the nominal and reduced configurations, the larger footprint provides superior composite performance, larger wrench margins, better conditioning, lower tracking errors, and substantially fewer unreached poses. Furthermore, it is the only tested scale for which the routing topology no longer has a statistically significant influence on pose completion, indicating increased robustness to architectural choices.

The improvement in reachability is also spatially meaningful. As the anchor footprint increases, failures at low altitude disappear completely, while the few remaining unreached poses are located near the upper boundary of the tested workspace. This behaviour is consistent with the underlying mechanics: increasing the anchor spacing enlarges the available moment arm most effectively when the payload is close to the ground anchors. At greater heights, the cable directions become nearly vertical regardless of the anchor spacing, reducing the benefit of further increasing the footprint.

The principal drawback of a larger anchor footprint is practical rather than mechanical. A wider anchor distribution requires a larger installation area around the deployment site, which may be constrained by the available space during façade operations. Consequently, although the largest tested footprint provides the best mechanical performance, the final design should balance these gains against the physical limitations of the intended deployment environment.

Ground-anchor footprint	Unreached poses
Small	15/60
Normal	10/60
Large	3/60

Table 6.8: Number of target poses that could not be reached by any evaluated configuration for each ground-anchor footprint.

6.5 Drone hook placement

This section focuses on analyzing how the UAVs attach to the payload. First, we compare a common cable-routing scheme across all configurations shown in Figure 6.3, keeping every other design variable fixed. This isolates the influence of the attachment topology itself. Afterward, we rerun the prescreening and subsequent simulations using the results obtained from this comparison.

6.5.1 Stewart cable routing

How drone attachment influences reaching the goal? Show evolution graph

If one of those give better results, analyze also the two previous section

For each analyze

- what are the results for the pre-screening?
- if something pass through, how are the results compared to the ones with triangle?
- which could be the reason why no results in the pre-screening/no good results in the simulations?

6.5.2 Point

The point attachment configuration is never able to command the payload to reach the desired pose, yielding 0 out of 60 successful poses across all setups that employ this drone-placement strategy. This demonstrates that relying on a single shared UAV attachment point is a fundamentally weak design choice, largely independent of the ground routing paired with it. A particularly illustrative comparison emerges when evaluating the same ground cable routing under different UAV attachment topologies. For example, contrasting LINE-LINE-TRIANGLE with LINE-LINE-POINT shows the reachability dropping from 40.00 % to 0.00%, underscoring how dramatically the attachment geometry influences achievable payload poses.

Insert a table, if so which?

6.5.3 Aligned

6.5.4 Disaligned

6.5.5 Line

6.5.6 Diagonal

[hand-made] Among the tested alternatives to a fully triangular attachment, diagonal is the least poor: best capacity margin (-0.63), best position error (0.79 m) and orientation error (0.69 rad) of the five, and joint-best pose-reached rate (11.7%). This is consistent with diagonal being the topology structurally closest to triangular among the non-triangular options in Figure, offering the most independent moment arms of the alternatives. Nonetheless, the gap to the fully triangular attachment used throughout (up to 85% pose-reached) is large enough that this exploratory comparison offers no evidence to prefer any tested alternative to the triangular UAV attachment adopted as the fixed baseline for this thesis.

TODO test also the ones resulted

6.5.7 Triangle comparison analysis

Across all tested ground layouts, the two-triangle UAV attachment consistently exhibits the highest conditioning index while satisfying the feasibility constraints. This indicates that the triangular topology provides a well-conditioned wrench mapping independently of the particular ground anchor arrangement, supporting its use as the reference configuration throughout the remainder of the thesis.

This makes composite score an actively misleading selection criterion for UAV attachment topology. Within the TRIANGLE-TRIANGLE family, the point attachment achieves the *highest* composite score of the five non-triangular options (3.08, ahead of line at 2.36 and diagonal at 1.95), driven by its radius of available force (14.3, the highest of the five) — yet it is the single worst performer on every task-level metric: worst position error (3.61 m, roughly 4–5× the error of the other attachments), worst capacity margin (-10.57), and 0% pose reached. A composite score built from static, quasi-steady indices rewards the point attachment’s large theoretical force envelope without penalizing the fact that a single shared attachment point gives the controller far less independent authority over the payload’s six degrees of freedom in practice. This is the most severe

instance found in this exploratory batch of the static/dynamic disagreement discussed in , and it argues for excluding point-type UAV attachment from the automated search's candidate set on physical grounds, independent of whatever score the search's objective function would assign it.

Conclusions

Future developments

- Consider different configuration rather than 6 on the ground and 3 on the top
- Façade interaction

Also answering these questions:

- Is it better having the drone connected through one or two cables to the payload in terms of easy maneuverability, feasible workspace, available wrench set and energy consumption?
- How accuracy on drones' position affects the accuracy on the platform's position?
- Are UAVs (resp. UGVs) strictly connected to the upper (resp. down) face or can they be attached to the down (resp. upper) face?

Bibliography

- [1] ShieldBot Project Consortium. (2025) Robotic solutions for construction, renovation & maintenance — the shieldbot project. Horizon Europe Grant Agreement No 101235093. [Online]. Available: <https://shieldbot.eu/the-project/>
- [2] CNRS. (2025, Nov.) Développer des robots parallèles à câbles pour l'industrie avec le projet Titanbot. Centre National de la Recherche Scientifique. [Online]. Available: <https://www.cnrs.fr/fr/actualite/developper-des-robots-paralleles-cables-pour-lindustrie-avec-le-projet-titanbot>
- [3] H. Xiong, H. Cao, X. Diao, W. Lu, and Y. Lou, “On the optimal energy efficiency of the multi-rotor UAVs of an aerial work platform based on an aerial cable towed robot,” *Mechanism and Machine Theory*, vol. 176, p. 105002, 2022. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S0094114X22002531>
- [4] A. Pott and T. Bruckmann, *Cable-driven parallel robots*. Springer, 2013, vol. 116.
- [5] É. Picard, S. Caro, F. Claveau, and F. Plestan, “Pulleys and force sensors influence on payload estimation of cable-driven parallel robots,” in *2018 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, 2018, pp. 1429–1436.
- [6] D. Six, S. Briot, A. Chriette, and P. Martinet, “Dynamic modelling and control of flying parallel robots,” *Control Engineering Practice*, vol. 117, p. 104953, 2021. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S0967066121002306>
- [7] J. Wang, Z. Zuo, K. Xia, and Y. Zou, “Adaptive position tracking control of uncertain stewart platform,” in *2023 2nd Conference on Fully Actuated System Theory and Applications (CFASTA)*, 2023, pp. 815–821.
- [8] J. Erskine, A. Chriette, and S. Caro, “Control and configuration planning of an aerial cable towed system,” in *2019 International Conference on Robotics and Automation (ICRA)*, 2019, pp. 6440–6446, ISSN: 2577-087X. [Online]. Available: <https://ieeexplore.ieee.org/document/8794396>
- [9] H. Jamshidifar and A. Khajepour, “Static workspace optimization of aerial cable towed robots with land-fixed winches,” *IEEE Transactions on Robotics*, vol. 36, no. 5, pp. 1603–1610, 2020. [Online]. Available: <https://ieeexplore.ieee.org/document/9119199>
- [10] J. Erskine, A. Chriette, and S. Caro, “Wrench analysis of cable-suspended parallel robots actuated by quadrotor unmanned aerial vehicles,” *Journal*

- of Mechanisms and Robotics*, vol. 11, no. 20909, 2019. [Online]. Available: <https://doi.org/10.1115/1.4042513>
- [11] C. Masone, H. H. Bühlhoff, and P. Stegagno, “Cooperative transportation of a payload using quadrotors: A reconfigurable cable-driven parallel robot,” in *2016 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, 2016, pp. 1623–1630.
 - [12] S. Liu, I. Fantoni, A. Chriette, and D. Six, “Wrench estimation and impedance-based control applied to a flying parallel robot interacting with the environment,” *IFAC-PapersOnLine*, vol. 55, no. 14, pp. 151–157, 2022. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S2405896322010096>
 - [13] S. Sun, X. Wang, D. Sanalidro, A. Franchi, M. Tognon, and J. Alonso-Mora, “Agile and cooperative aerial manipulation of a cable-suspended load,” *Science Robotics*, vol. 10, no. 107, pp. 1–46, 2025, publisher: American Association for the Advancement of Science (AAAS). [Online]. Available: <https://hal.science/hal-05360829>
 - [14] D. Sanalidro, M. Tognon, A. J. Cano, J. Cortés, and A. Franchi, “Indirect force control of a cable-suspended aerial multi-robot manipulator,” *IEEE Robotics and Automation Letters*, vol. 7, no. 3, pp. 6726–6733, 2019. [Online]. Available: <https://ieeexplore.ieee.org/abstract/document/9779498>
 - [15] J. Erskine, “Dynamic control and singularities of rigid bearing-based formations of quadrotors,” issue: 2021ECDN0044. [Online]. Available: <https://theses.hal.science/tel-03699595>
 - [16] F. Forte, R. Naldi, A. Macchelli, and L. Marconi, “Impedance control of an aerial manipulator,” in *2012 American Control Conference (ACC)*, 2012, pp. 3839–3844.
 - [17] M. Tognon, C. Gabellieri, L. Pallottino, and A. Franchi, “Aerial co-manipulation with cables: The role of internal force for equilibria, stability, and passivity,” *IEEE Robotics and Automation Letters*, vol. 3, no. 3, pp. 2577–2583, 2018. [Online]. Available: <https://ieeexplore.ieee.org/document/8286868>
 - [18] H. H. Cheng and D. Lau, “Cable attachment optimization for reconfigurable cable-driven parallel robots based on various workspace conditions,” *IEEE Transactions on Robotics*, vol. 39, no. 5, pp. 3759–3775, 2023. [Online]. Available: <https://ieeexplore.ieee.org/document/10269667>
 - [19] A. L. C. Ruiz, S. Caro, P. Cardou, and F. Guay, “ARACHNIS: Analysis of robots actuated by cables with handy and neat interface software,” in *Cable-Driven Parallel Robots*, A. Pott and T. Bruckmann, Eds. Springer International Publishing, 2015, vol. 32, pp. 293–305. [Online]. Available: https://link.springer.com/10.1007/978-3-319-09489-2_21
 - [20] T. Lee, M. Leok, and N. H. McClamroch, “Geometric tracking control of a quadrotor UAV on SE(3),” in *Proc IEEE Conf Decis Control*. Institute of Electrical and Electronics Engineers Inc., 2010, pp. 5420–5425, journal Abbreviation: Proc IEEE Conf Decis Control.

- [21] Open Robotics. (2023) Getting started with Gazebo Harmonic. Open Source Robotics Foundation. [Online]. Available: <https://gazebo-sim.org/docs/harmonic/getstarted/>
- [22] DeepMind, “Mujoco documentation: Overview (version 2.3.7),” <https://mujoco.readthedocs.io/en/2.3.7/overview.html>, 2023, accessed: 2026-07-10.
- [23] C. Buono, “Acts simulator (aerial cable-towed system),” Jul. 2026. [Online]. Available: https://github.com/chiarabuono/acts_simulator.git
- [24] Y. Yang, S. Zhao, Y. Zhang, and L. Wu, “Robust wrench-feasible control for multiple UAVs aerial transportation system with adaptive cable configuration,” in *2025 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, 2025, pp. 18 029–18 035, ISSN: 2153-0866. [Online]. Available: <https://ieeexplore.ieee.org/document/11246861>
- [25] C. T. Recchiuto, “Research track ii - fundamentals of statistics,” Lecture slides, 2025, unpublished teaching material.

Singularities and Performance Indices

write it better

Cable-driven parallel robots (CDPRs) and aerial cable-driven systems experience critical operating limits where force transmission or controllability degrades. Table A.1 summarizes these operational singularities and their physical consequences.

Type	Cause	Detection Index	Consequence
Kinematic	$\text{rank}(J_p) < 6$	Condition Number, Manipulability	Loss of platform Degrees of Freedom (DoF)
Wrench	Desired wrench outside AWS	Capacity Margin, RAW	Target wrench cannot be generated
Tension	Negative or zero cable tensions	Tension optimization	Cable slack / loss of constraint
Stiffness	Poor cable distribution	Stiffness Matrix, Simulation	Unwanted oscillations and rocking
Dynamic	Closed-loop instability	Eigenvalues, Simulation	Trajectory tracking failure

Table A.1: Classification of Singularity Types in Cable-Driven Parallel Systems

Statistical Methods

Clean this

This appendix summarizes the statistical methods used to analyse the experimental results presented in Chapter 6. Hypothesis testing is used to determine whether the experimental observations provide sufficient evidence to support a research claim[25]. Before conducting the statistical analysis, two competing hypotheses are defined:

- Null hypothesis (H_0): no statistically significant difference exists between the evaluated robot configurations.
- Alternative hypothesis (H_a): at least one robot configuration differs significantly from the others.

The statistical tests produce a p-value, representing the probability of obtaining the observed data if the null hypothesis is true. Throughout this thesis, a significance level of $\alpha = 0.05$ was adopted. Consequently, when the computed p-value is smaller than 0.05, the null hypothesis is rejected in favor of the alternative hypothesis. Otherwise, there is insufficient evidence to reject the null hypothesis. It is important to note that failing to reject H_0 does not prove that the null hypothesis is true; it merely indicates that the collected evidence is insufficient to conclude otherwise.

Additionally, we distinguish between parametric and non-parametric statistical methods. Parametric tests assume that the underlying data satisfy specific distributional assumptions, most commonly normality. When these assumptions cannot be guaranteed, non-parametric methods provide a more robust alternative because they do not rely on a predefined population distribution.

Since every robot configuration was evaluated on the same set of target poses, producing paired observations, and several evaluation metrics were binary variables, non-parametric statistical tests were selected throughout this work.

B.1 Friedman Test

The Friedman test is the non-parametric equivalent of a repeated-measures analysis of variance (ANOVA). It compares three or more related samples to determine whether they originate from the same distribution without assuming normally distributed data.

In this thesis, the Friedman test was applied to all continuous performance metrics, including the composite score, manipulability, conditioning index, capacity margin, force

capability, and positioning errors. The test evaluates whether at least one robot configuration exhibits significantly different performance from the others across the common set of evaluated poses.

B.2 Cochran’s Q Test

Several performance metrics in this work are binary outcomes, such as whether the desired pose was reached or whether cable rubbing occurred. For repeated binary observations, the appropriate omnibus statistical test is Cochran’s Q test.

Cochran’s Q test determines whether the probability of success differs significantly among three or more related configurations. In this thesis, it was applied to the binary metrics describing pose success, orientation success, cable rubbing events, and simulation instability.

B.3 Pairwise Comparisons

When an omnibus test indicates a statistically significant difference, it identifies that at least one configuration differs from the others but does not specify which configurations are responsible for the difference. Therefore, post-hoc pairwise comparisons were subsequently performed.

For continuous metrics, the Wilcoxon signed-rank test was used. This test compares two related samples by analysing the signed differences between paired observations and is the non-parametric alternative to the paired Student’s t-test.

For binary metrics, McNemar’s exact test was employed. This test compares paired binary observations and evaluates whether two related configurations exhibit significantly different success probabilities.

In both cases, each robot configuration was compared with the selected reference configuration.

B.4 Multiple Comparison Correction

Performing multiple statistical tests increases the probability of obtaining significant results purely by chance. To reduce this risk, multiple comparison corrections were applied.

The Benjamini-Hochberg False Discovery Rate (BH-FDR) procedure was applied to the omnibus tests. Unlike methods that strictly control the probability of any false positive, BH-FDR controls the expected proportion of false discoveries among all rejected hypotheses while maintaining greater statistical power.

For the post-hoc pairwise comparisons, the Holm correction was applied. Holm’s procedure adjusts the p-values sequentially and controls the family-wise error rate while generally being less conservative than the traditional Bonferroni correction.

Together, these correction procedures ensure that statistically significant differences reported in Chapter 6 are unlikely to be the result of multiple testing alone.

Complete Evaluation Results

This appendix presents the complete numerical results for all evaluated platform configurations and workspace sizes. The results complement the discussion in Chapter 6 by providing the full set of measurements used in the comparative analysis. For each metric, values are reported for the Large, Normal, and Small workspace configurations. The `acts_stewart` platform is used as the reference configuration. Values shown in **bold** followed by an asterisk (*) indicate statistically significant differences with respect to the reference configuration after Holm-adjusted hypothesis testing ($p < 0.05$).

Table C.1 contains the performance and force-related metrics, while Table C.2 reports the task execution, kinematic, and stability metrics.

Configuration	Large	Normal	Small
Cable Rubbed			
acts_stewart	0.3167	0.3167	0.3167
central-trapezoid-horizontal-parallelepiped	0.5333*	0.6333*	0.7833*
parallelepiped-ext-horizontal-parallelepiped	0.4333	0.4500	0.8667*
parallelepiped-int-2x3	0.4333	0.4667	0.6333*
rectangle-opposite-2x3	0.9167*	0.9333*	1.0000*
two-triangles-vertical-parallelepiped	0.8833*	0.9167*	0.9833*
Capacity Margin			
acts_stewart	2.7714	2.7714	2.7714
central-trapezoid-horizontal-parallelepiped	7.7971*	3.7436	0.6520*
parallelepiped-ext-horizontal-parallelepiped	6.1923*	-2.1391*	-6.7587*
parallelepiped-int-2x3	8.1812*	1.7137	-4.1818*
rectangle-opposite-2x3	11.3179*	-0.4414	-0.6320*
two-triangles-vertical-parallelepiped	9.6411*	2.0005	-0.7306*
Composite Score			
acts_stewart	5.5706	5.5706	5.5706
central-trapezoid-horizontal-parallelepiped	15.8643*	4.8839	2.4967*
parallelepiped-ext-horizontal-parallelepiped	12.9764*	5.8649	1.2875*
parallelepiped-int-2x3	16.7886*	6.7857	1.7242*
rectangle-opposite-2x3	18.9950*	8.9142*	4.5529*
two-triangles-vertical-parallelepiped	17.0749*	5.9310	2.9963*
Conditioning Index			
acts_stewart	0.0533	0.0533	0.0533

Continued on next page

Configuration	Large	Normal	Small
central-trapezoid-horizontal-parallelepiped	0.1374*	0.0803*	0.0461*
parallelepiped-ext-horizontal-parallelepiped	0.1639*	0.1210*	0.0794*
parallelepiped-int-2x3	0.1516*	0.0997*	0.0719
rectangle-opposite-2x3	0.1582*	0.1246*	0.0819*
two-triangles-vertical-parallelepiped	0.1600*	0.1107*	0.0694
Manipulability			
acts_stewart	0.1054	0.1054	0.1054
central-trapezoid-horizontal-parallelepiped	0.7917*	0.2099*	0.0895*
parallelepiped-ext-horizontal-parallelepiped	1.7393*	0.7770*	0.2964
parallelepiped-int-2x3	1.1789*	0.4536*	0.2465
rectangle-opposite-2x3	2.1414*	1.0459*	0.4775*
two-triangles-vertical-parallelepiped	1.0935*	0.4907*	0.2523
Radius Available Force			
acts_stewart	11.7301	11.7301	11.7301
central-trapezoid-horizontal-parallelepiped	30.5963*	7.7693*	5.2152*
parallelepiped-ext-horizontal-parallelepiped	25.5335*	14.9614	7.0405*
parallelepiped-int-2x3	33.0155*	14.4922	6.0689*
rectangle-opposite-2x3	36.1480*	21.5257*	11.8971
two-triangles-vertical-parallelepiped	30.2122*	11.1120	6.9219*
Worst Case Capacity Margin			
acts_stewart	0.7337	0.7337	0.7337
central-trapezoid-horizontal-parallelepiped	0.7108*	0.7284	0.7148*
parallelepiped-ext-horizontal-parallelepiped	0.2612	0.2491	-1.3039*
parallelepiped-int-2x3	0.6786	0.6981	0.3715
rectangle-opposite-2x3	0.7385*	-0.4904	-0.1371
two-triangles-vertical-parallelepiped	0.7201*	0.6747	0.5729

Table C.1: Performance and force-related metrics for all platform configurations

Configuration	Large	Normal	Small
Orientation Error			
acts_stewart	0.1223	0.1223	0.1223
central-trapezoid-horizontal-parallelepiped	0.3261	0.1081	0.1390
parallelepiped-ext-horizontal-parallelepiped	0.4209	0.6533*	0.9109*
parallelepiped-int-2x3	0.1945	0.3063	0.5346*
rectangle-opposite-2x3	0.2831	0.3855*	0.5682*
two-triangles-vertical-parallelepiped	0.2210	0.3989	0.3787*
Position Error			
acts_stewart	0.0592	0.0592	0.0592
central-trapezoid-horizontal-parallelepiped	0.3480*	0.0688	0.2278*
parallelepiped-ext-horizontal-parallelepiped	1.3721	1.9097*	2.5100*
parallelepiped-int-2x3	0.5278	0.8452	1.6011*
rectangle-opposite-2x3	0.3350*	1.4925*	1.7521*
two-triangles-vertical-parallelepiped	0.2813	1.0135*	1.2945*
Orientation Reached			
acts_stewart	0.6500	0.6500	0.6500
central-trapezoid-horizontal-parallelepiped	0.5833	0.7333	0.6000
parallelepiped-ext-horizontal-parallelepiped	0.6667	0.5333	0.3500*
parallelepiped-int-2x3	0.7667	0.7500	0.5667
rectangle-opposite-2x3	0.6500	0.5833	0.4333
two-triangles-vertical-parallelepiped	0.7500	0.6667	0.5667
Pose Reached			
acts_stewart	0.6500	0.6500	0.6500
central-trapezoid-horizontal-parallelepiped	0.5833	0.7333	0.6000
parallelepiped-ext-horizontal-parallelepiped	0.6667	0.5333	0.3500*
parallelepiped-int-2x3	0.7667	0.7500	0.5667
rectangle-opposite-2x3	0.6500	0.5833	0.4333
two-triangles-vertical-parallelepiped	0.7500	0.6667	0.5667
Simulation Unstable			
acts_stewart	0.0833	0.0833	0.0833
central-trapezoid-horizontal-parallelepiped	0.0667	0.0333	0.1000
parallelepiped-ext-horizontal-parallelepiped	0.0167	0.0500	0.1500
parallelepiped-int-2x3	0.0500	0.0500	0.0833
rectangle-opposite-2x3	0.0667	0.0500	0.1500
two-triangles-vertical-parallelepiped	0.1167	0.0667	0.1333

Table C.2: Task execution, kinematic, and stability metrics for all platform configurations