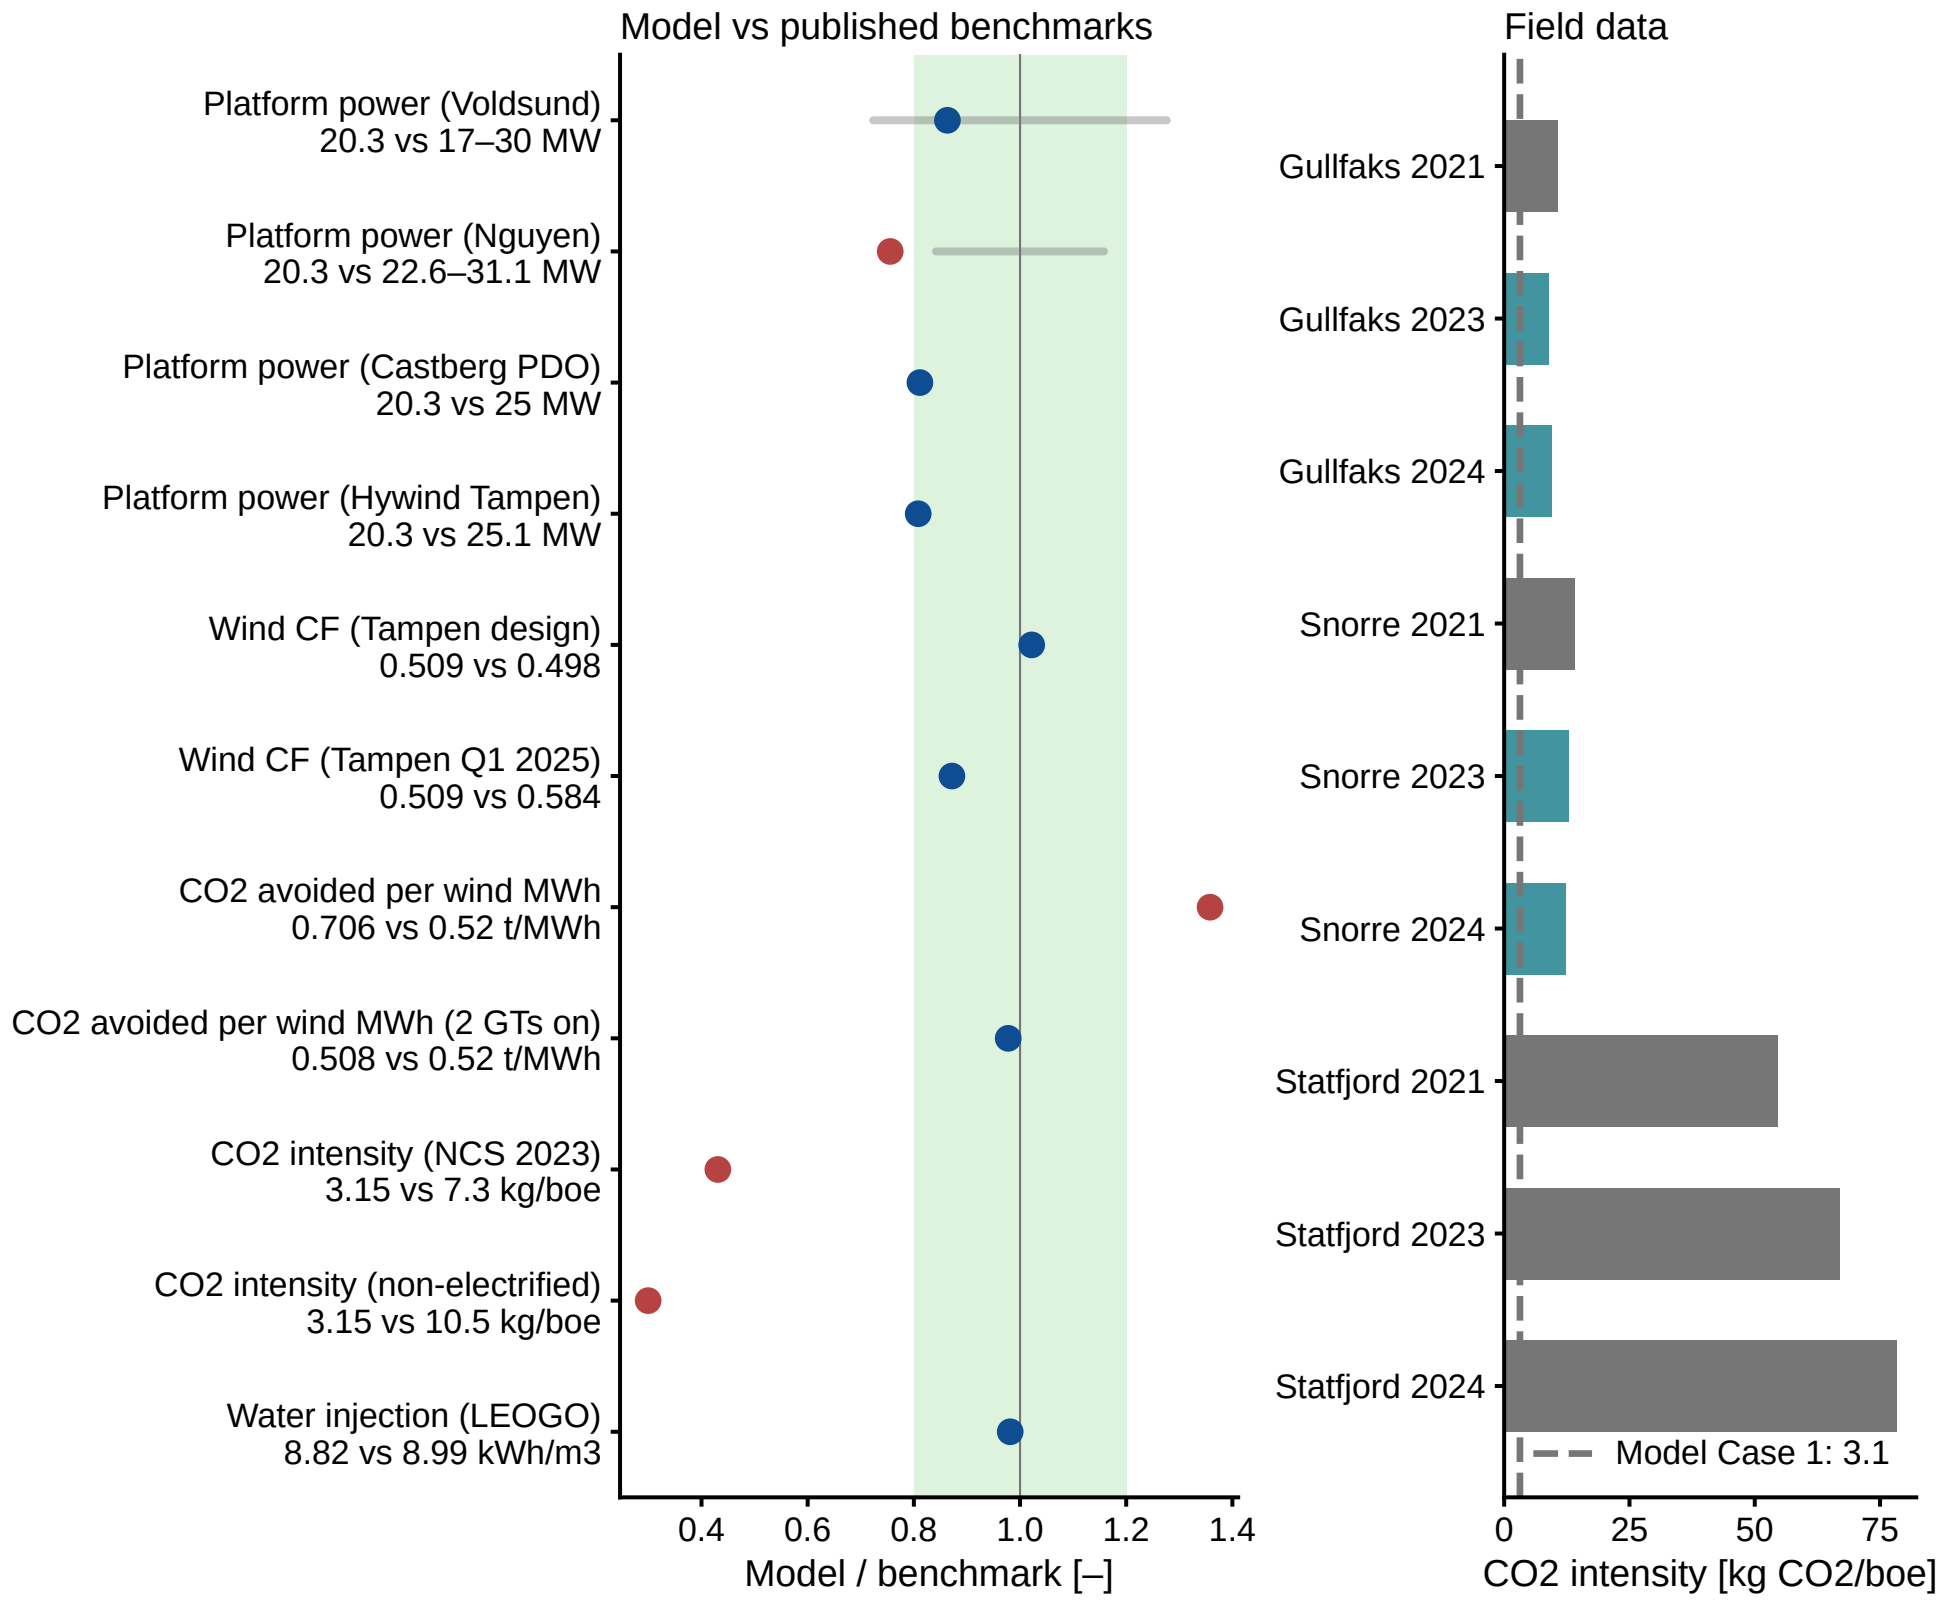
Model vs published benchmarks
Platform power (Voldsund)
20.3 vs 17–30 MW
Platform power (Nguyen)
20.3 vs 22.6–31.1 MW
Platform power (Castberg PDO)
20.3 vs 25 MW
Platform power (Hywind Tampen)
20.3 vs 25.1 MW
Wind CF (Tampen design)
0.509 vs 0.498
Wind CF (Tampen Q1 2025)
0.509 vs 0.584
CO2 avoided per wind MWh
0.706 vs 0.52 t/MWh
CO2 avoided per wind MWh (2 GTs on)
0.508 vs 0.52 t/MWh
CO2 intensity (NCS 2023)
3.15 vs 7.3 kg/boe
CO2 intensity (non-electrified)
3.15 vs 10.5 kg/boe
Water injection (LEOGO)
8.82 vs 8.99 kWh/m3
0.4
0.6
0.8
1.0
1.2
1.4
Model / benchmark [–]
Field data
Gullfaks 2021
Gullfaks 2023
Gullfaks 2024
Snorre 2021
Snorre 2023
Snorre 2024
Statfjord 2021
Statfjord 2023
Statfjord 2024
Model Case 1: 3.1
0
25
50
75
CO2 intensity [kg CO2/boe]