



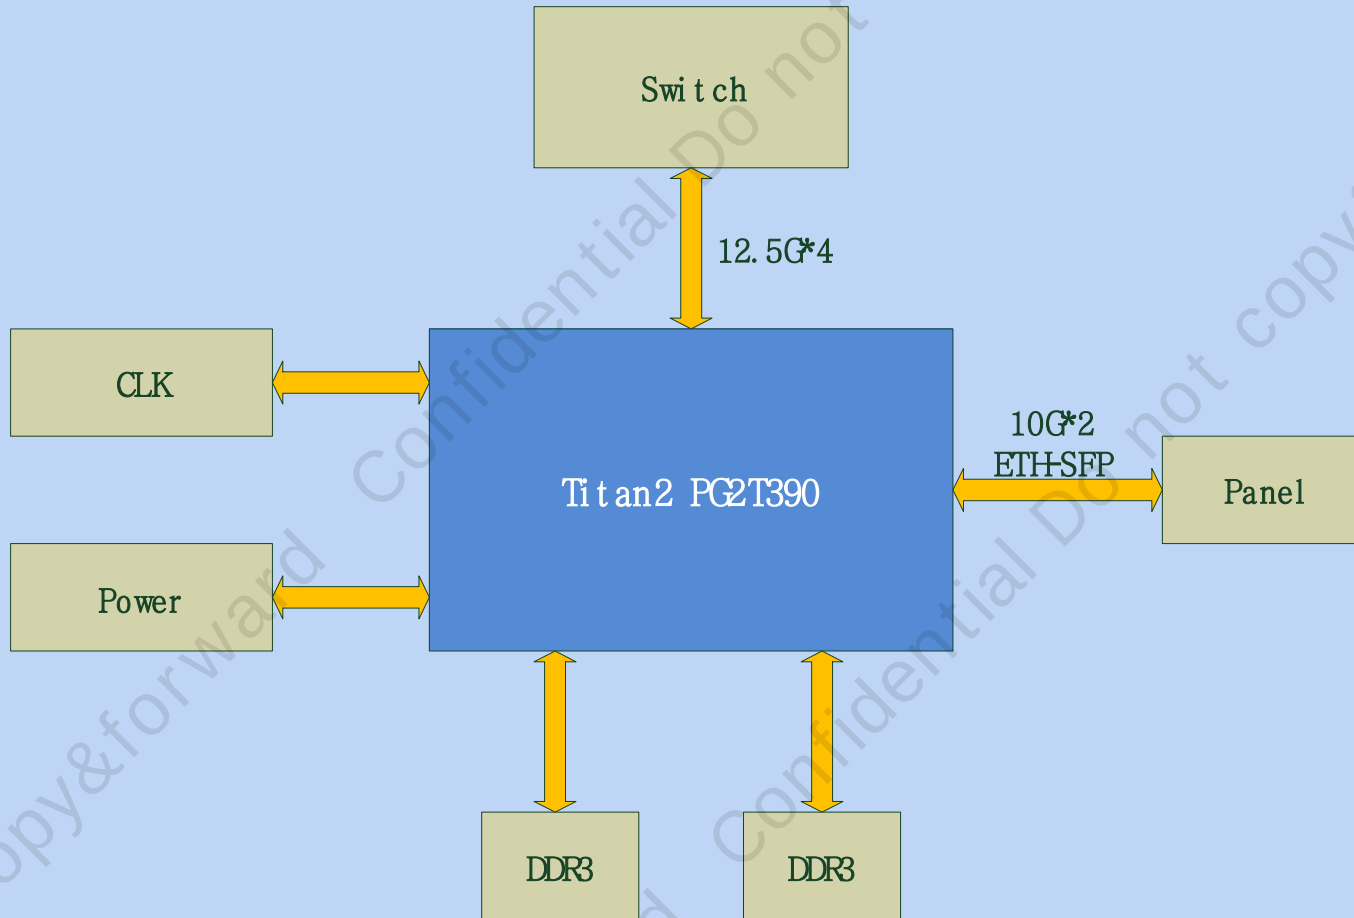



FPGA Function

- Fmax 156.25MHz
- DDR3 HP bank @1600Mhz
- 10GE/GE Dynamic Switch

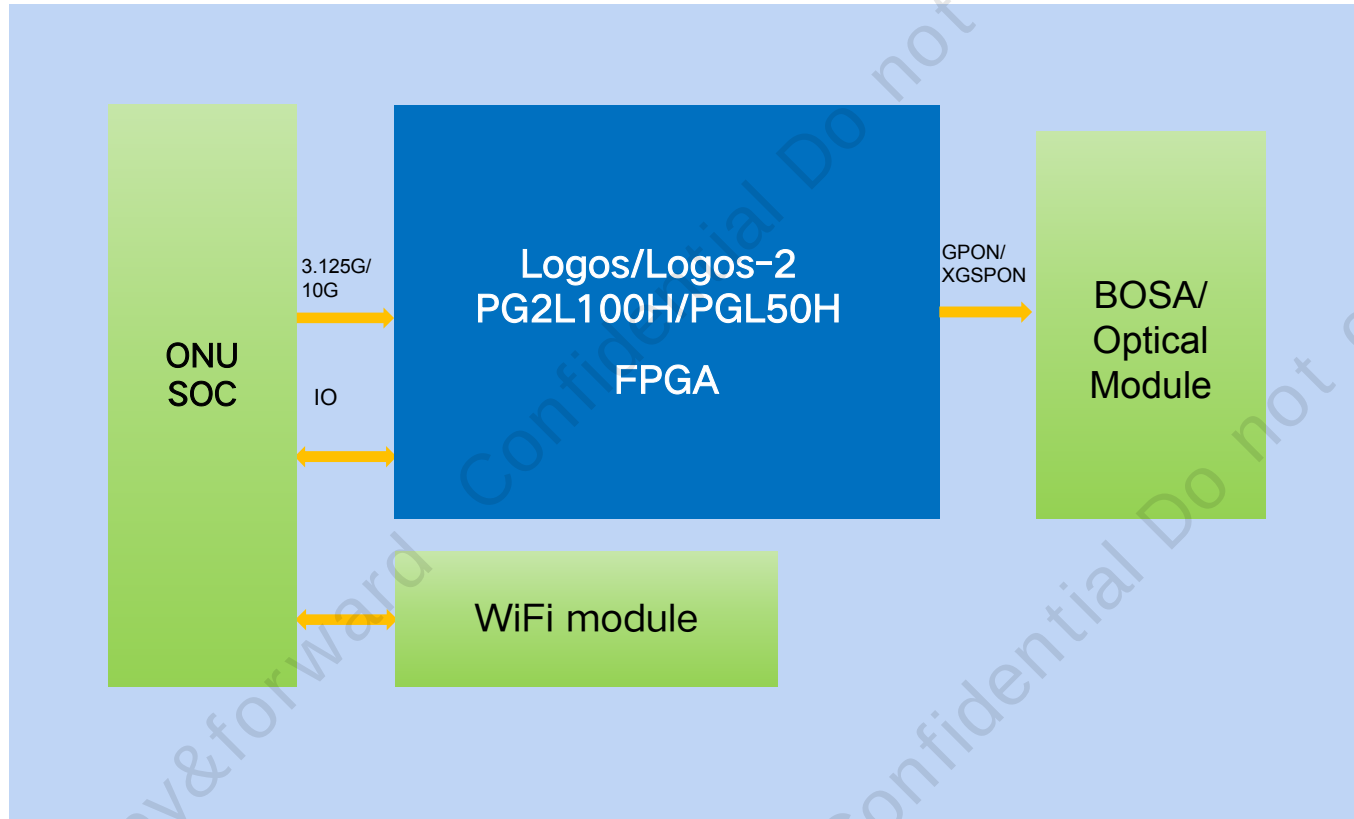


Interface Description:

- 1、XGPON Fiber
- 2、FTTR down link 2.5Gbps、Uplink 1.25Gbps

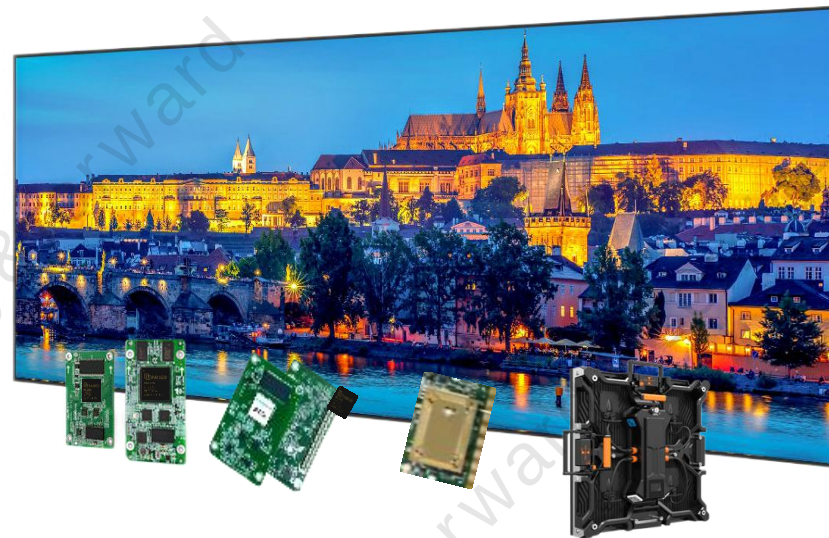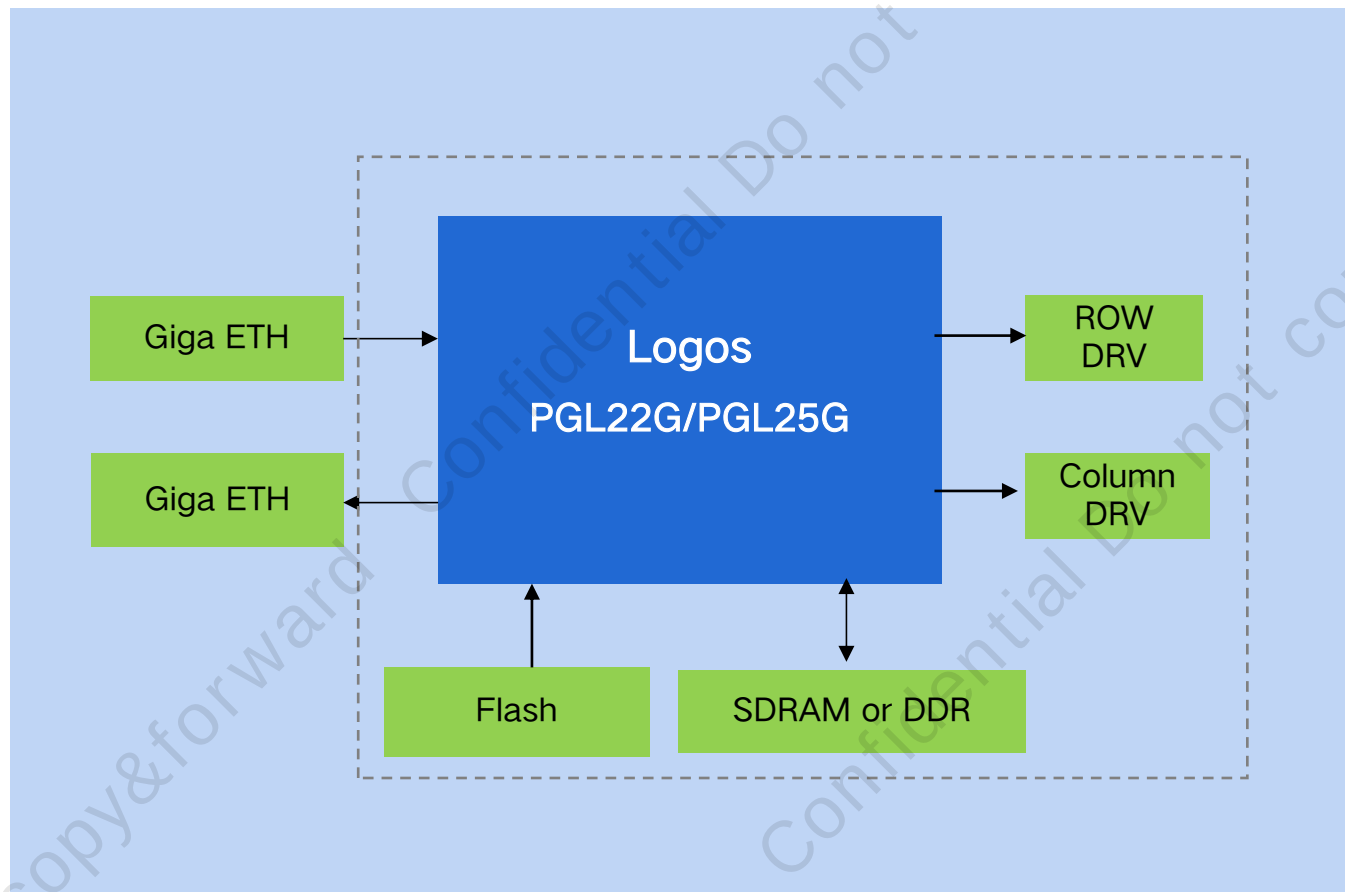


FPGA实现功能:

- Main Control Logic
- Video Coder/Decoder
- Image Processing DRV
- ETH Interface

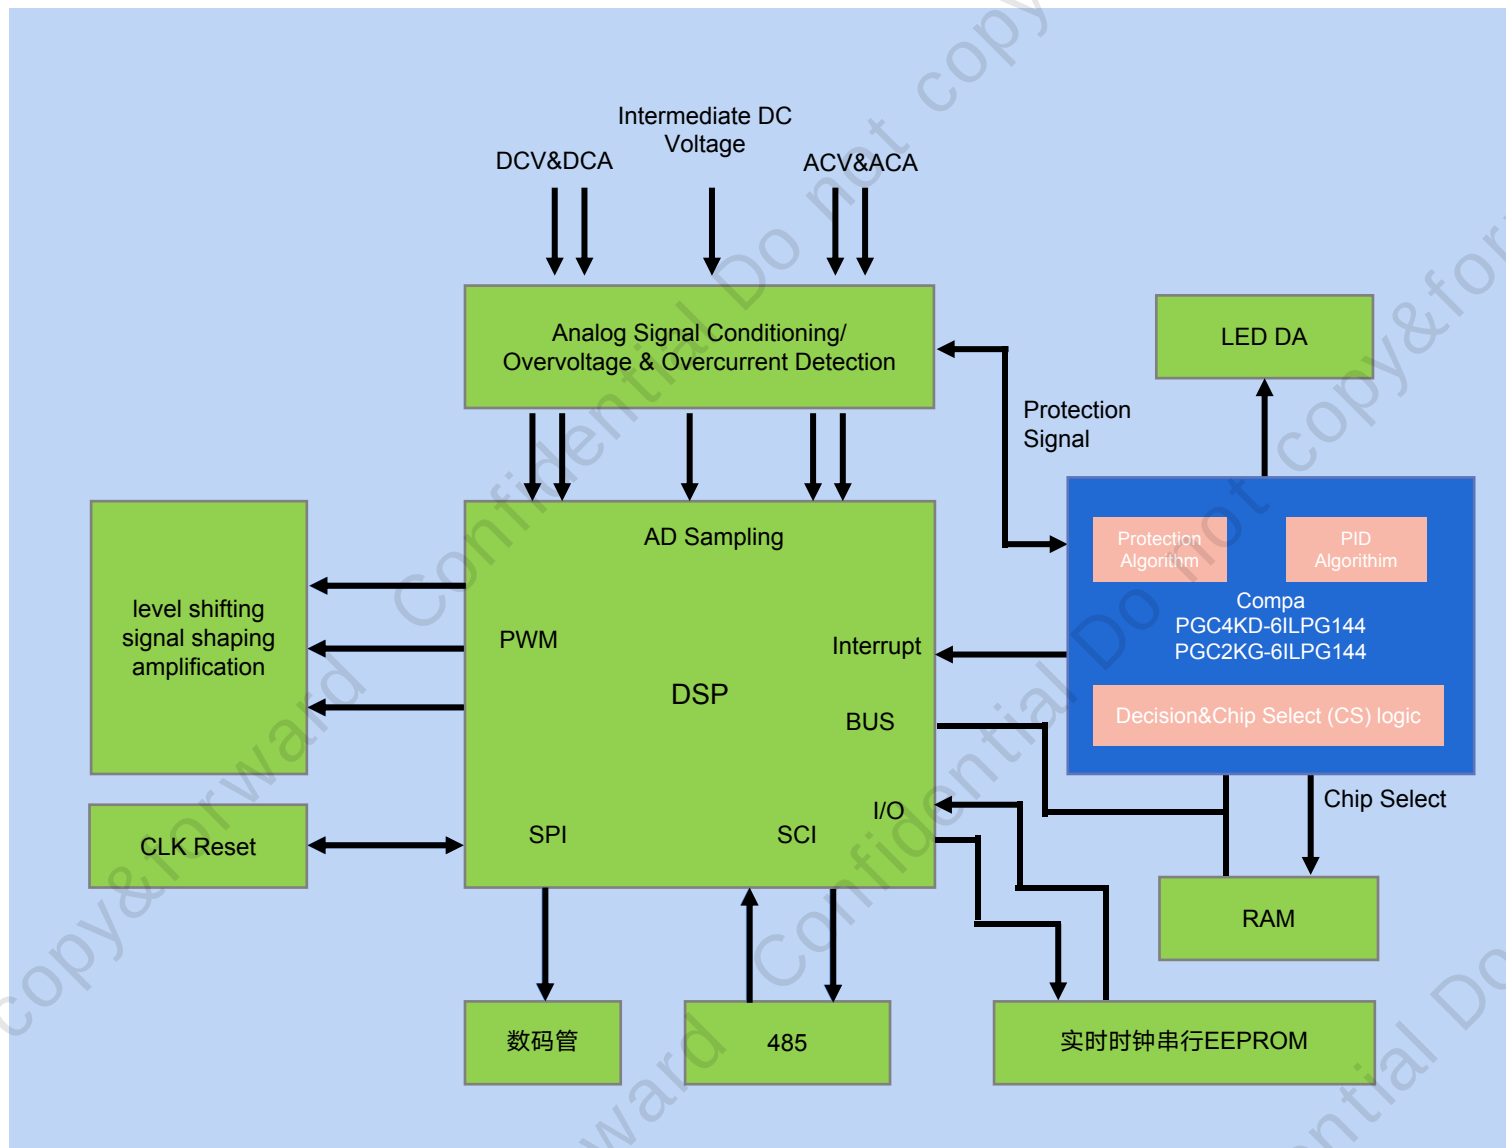

Compa CPLD Function:


- DSP Processing Expansion
- Fault Detection and Alarm
- IO Control expansion
- PID algorithm

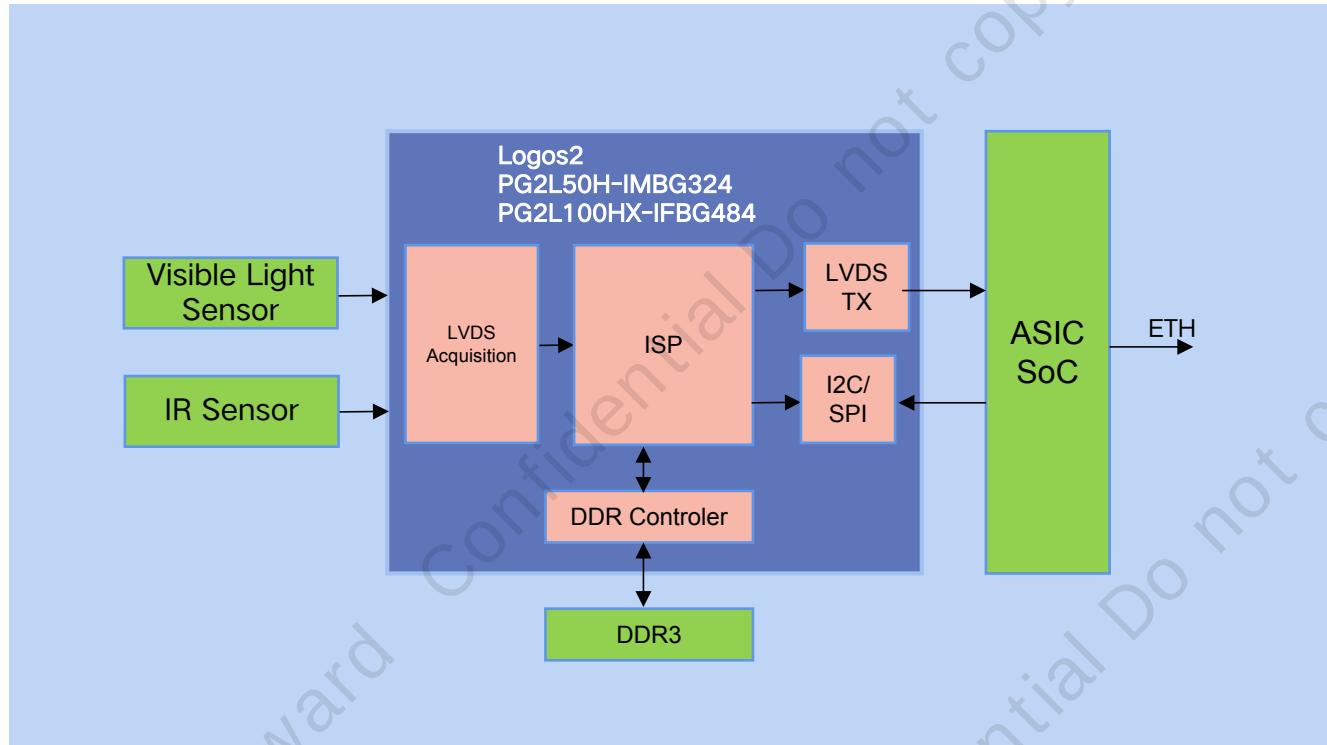

FPGA Function


- Date collection from Sensor LVDS @ 1.25Gbps/Lane
- Image alignment processing & partial image algorithms



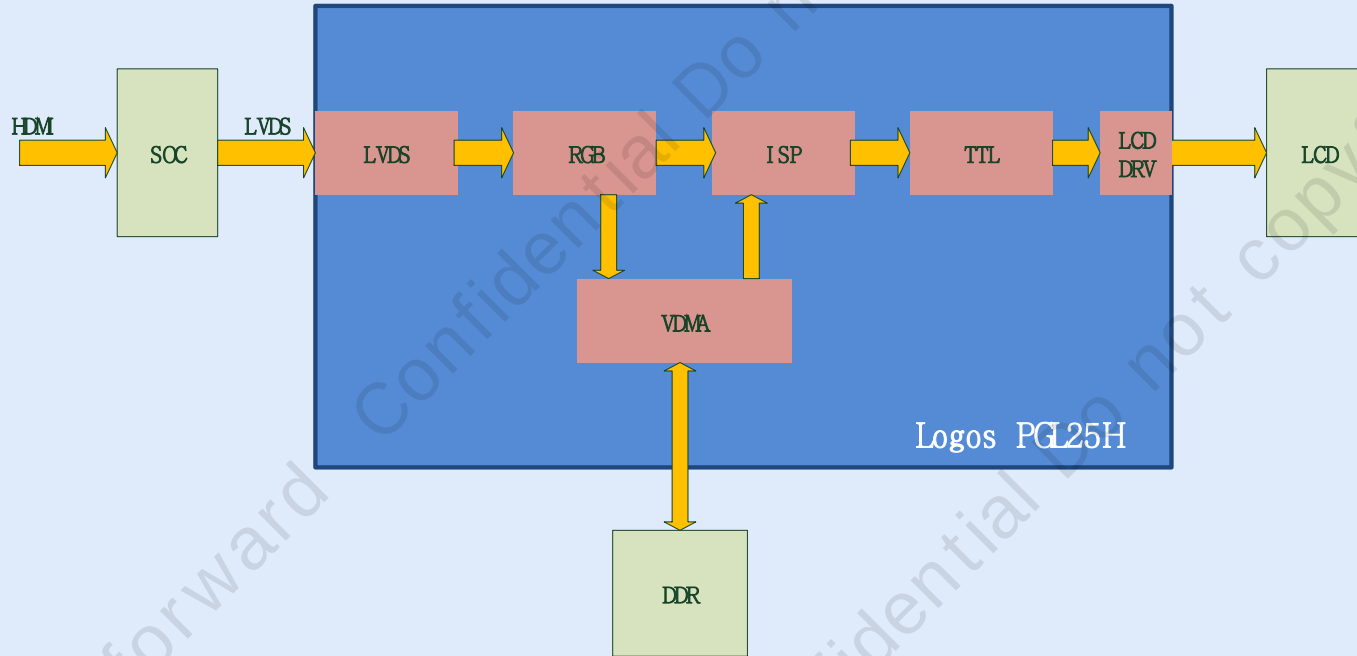

FPGA Function:

- LVDS interface
- TTL, DDR, LCD DRV
- ISP Algorithmic Logic

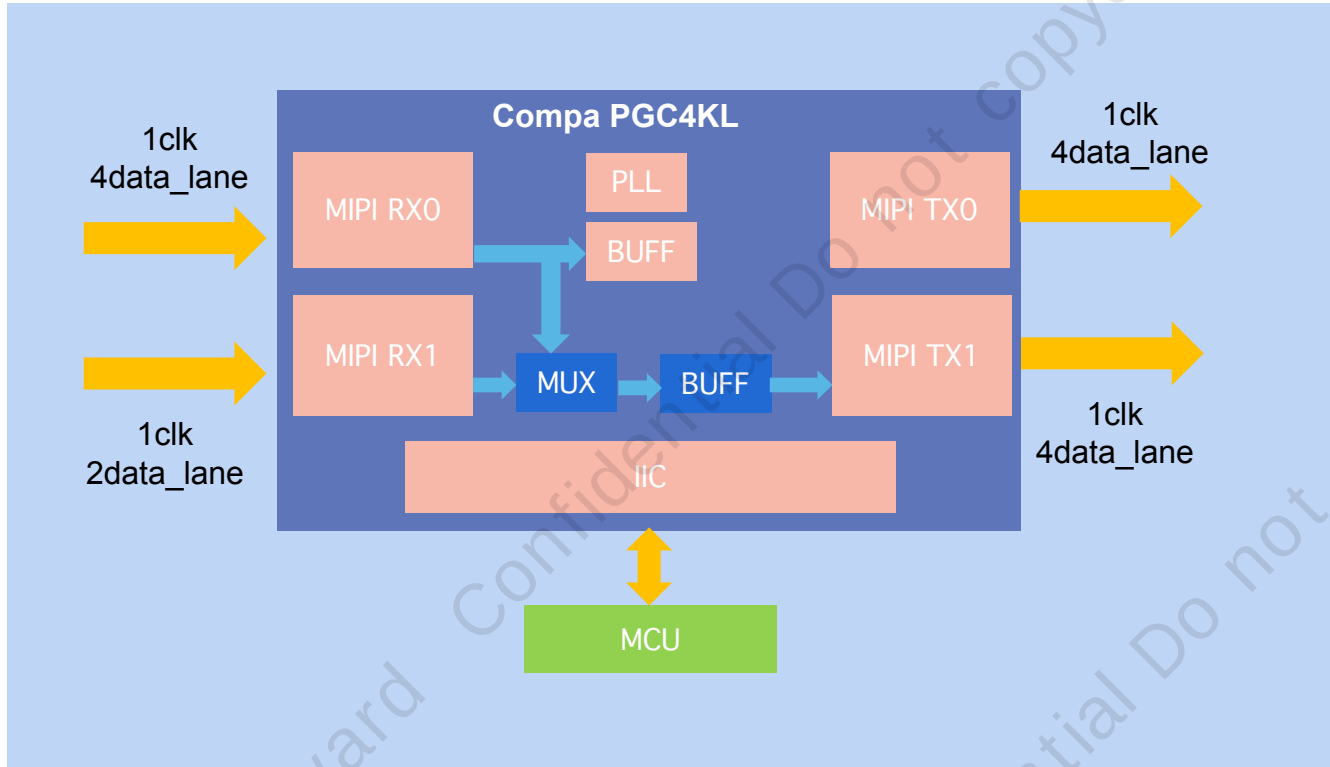

FPGA Function:

- 800+Mbps MIPI RX/TX
- Status Monitoring and Logic Control
- Quick Start

