


Standard Corrugated Facade Sheet

DM-45

SHEET THICKNESS	0,7 mm
ALLOY / COMPOSITION	AlMg3 (EN AW-5754)
WAVE PITCH	18 mm
WAVE HEIGHT	4,5 mm
FINISH / COATING	PVDF Alucoat, Silver-Grey
FIRE RATING	A2-s1,d0 (EN 13501-1)

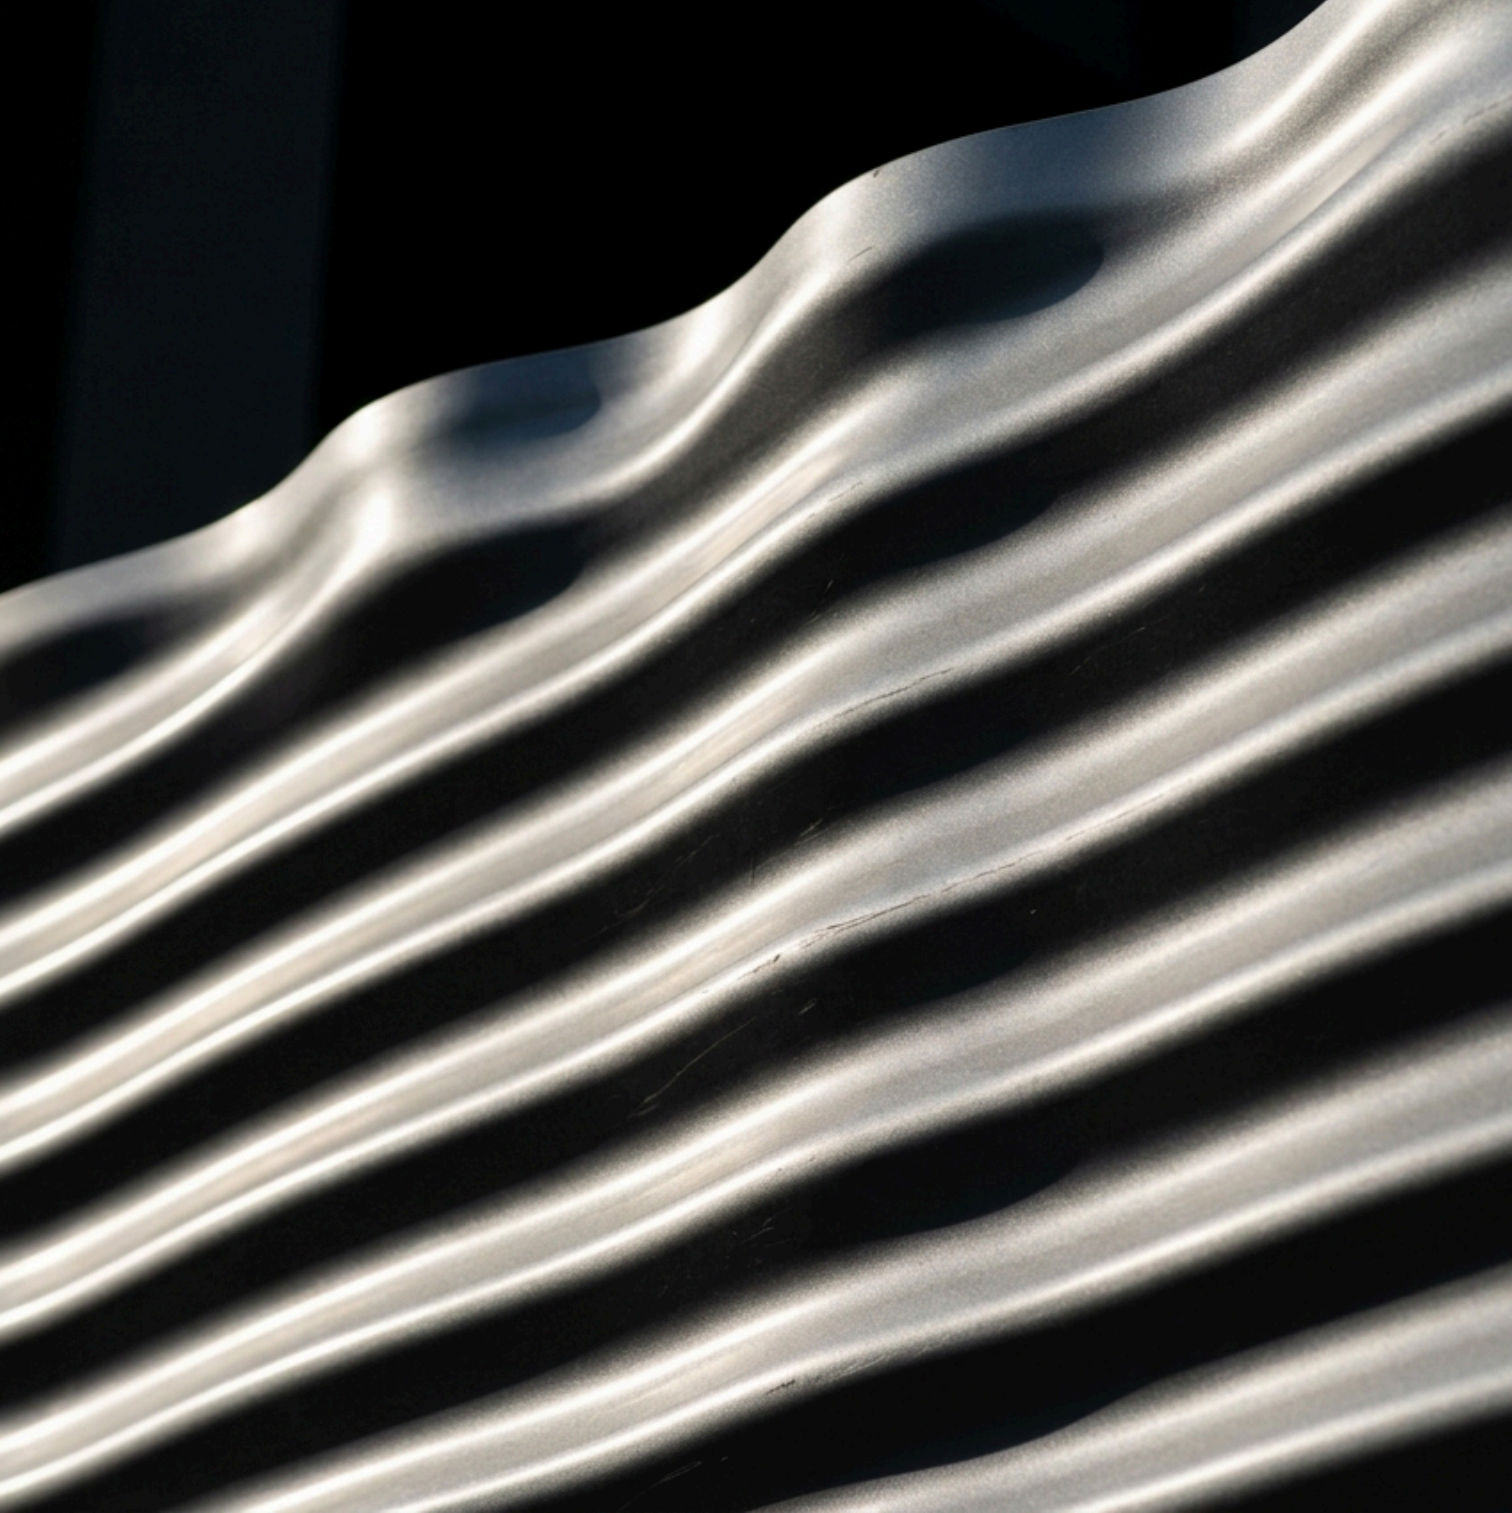

Deep Profile Corrugated Metal Sheet

DM-4 6

SHEET THICKNESS	1,0 mm
ALLOY / COMPOSITION	AlMg1 (EN AW-5005)
WAVE PITCH	32 mm
WAVE HEIGHT	9,0 mm
FINISH / COATING	Polyester RAL 7016, anthracite grey
FIRE RATING	A2-s1,d0 (EN 13501-1)



Stainless Steel Corrugated Sheet

DM-47

SHEET THICKNESS	0,8 mm
ALLOY / COMPOSITION	AISI 316L (Stainless steel)
WAVE PITCH	22 mm
WAVE HEIGHT	6,0 mm
SURFACE FINISH	Brushed (Finish No. 4)
FIRE RATING	A1 (EN 13501-1)



Galvanized Corrugated Sheet

DM-48

SHEET THICKNESS	0,55 mm
ALLOY / COMPOSITION	S350GD+Z275 (EN 10346)
WAVE PITCH	25 mm
WAVE HEIGHT	7,0 mm
FINISH / COATING	Hot-dip galvanizing Z275 g/m²
FIRE RATING	A1 (EN 13501-1)



Corten Weathering Steel Corrugated Sheet

DM-49

SHEET THICKNESS	1,5 mm
ALLOY / COMPOSITION	S355J2WP (EN 10025-5, COR-TEN)
WAVE PITCH	40 mm
WAVE HEIGHT	12,0 mm
SURFACE FINISH	Natural patina, rusty brown
FIRE RATING	A1 (EN 13501-1)



Standard Expanded Metal Sheet

XP-45

STRAND THICKNESS	1,0 mm
ALLOY / COMPOSITION	AlMg3 (EN AW-5754)
MESH SWM × LWM	10 × 20 mm
STRAND WIDTH	1,5 mm
OPEN AREA	≈ 56 %
FIRE RATING	A2-s1,d0 (EN 13501-1)



Flattened Expanded Metal Sheet

XP-46


STRAND THICKNESS	1,5 mm
ALLOY / COMPOSITION	AlMn1 (EN AW-3003)
MESH SWM × LWM	15 × 30 mm
STRAND WIDTH	2,0 mm
OPEN AREA	≈ 50 %
FIRE RATING	A2-s1,d0 (EN 13501-1)



Large Mesh Expanded Metal Panel

XP-47

STRAND THICKNESS	2,0 mm
ALLOY / COMPOSITION	S235JR (Black steel)
MESH SWM × LWM	30 × 60 mm
STRAND WIDTH	3,0 mm
OPEN AREA	≈ 72 %
FIRE RATING	A1 (EN 13501-1)

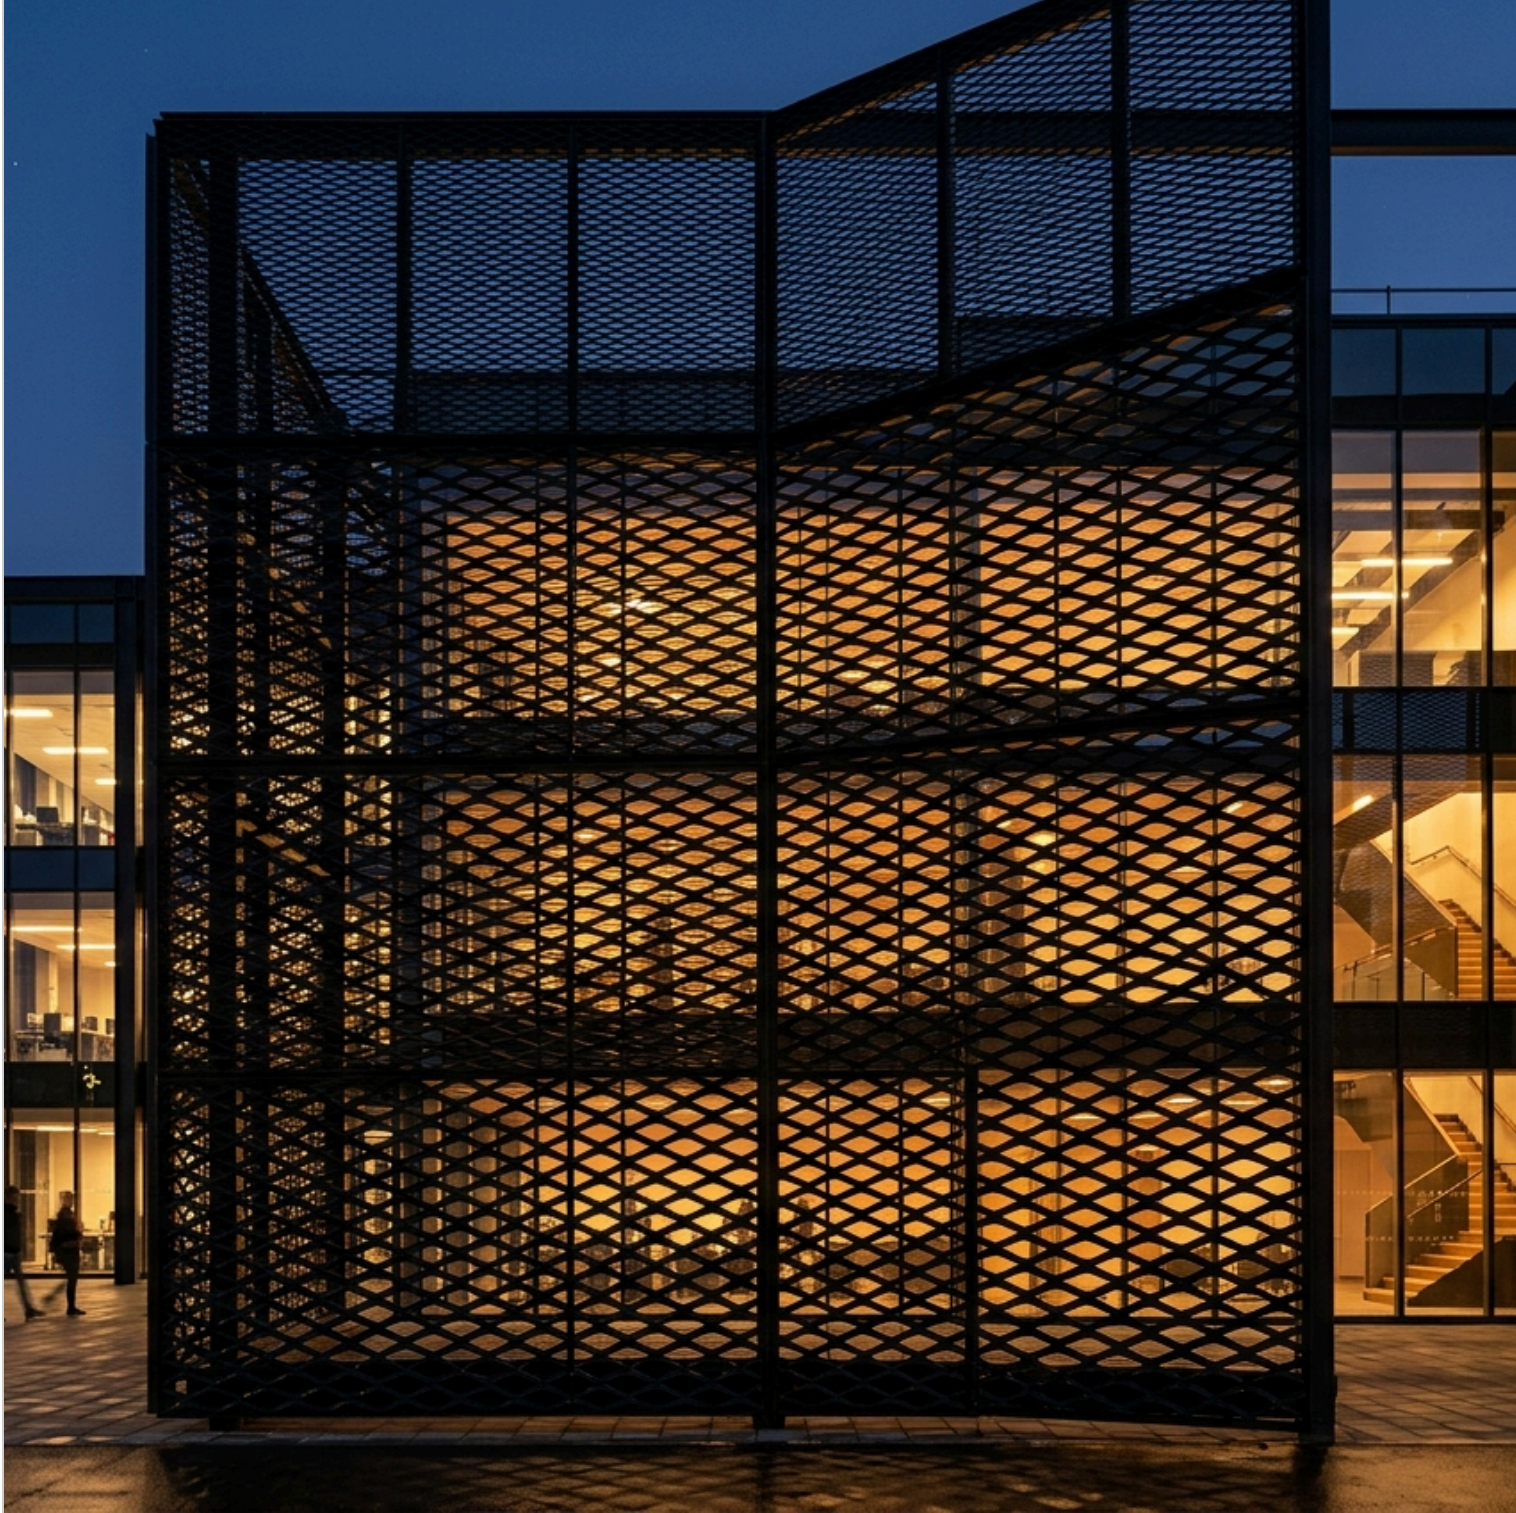

Stainless Steel Expanded Metal Sheet

XP-48

STRAND THICKNESS	1,0 mm
ALLOY / COMPOSITION	AISI 304 (EN 1.4301)
MESH SWM × LWM	8 × 16 mm
STRAND WIDTH	1,2 mm
OPEN AREA	≈ 48 %
FIRE RATING	A1 (EN 13501-1)



Powder Coated Expanded Metal Sheet

XP-49

STRAND THICKNESS	1,5 mm
ALLOY / COMPOSITION	AlMg3 (EN AW-5754)
MESH SWM × LWM	20 × 40 mm
STRAND WIDTH	2,5 mm
FINISH / COATING	Polyester RAL 9005, Matte Black
FIRE RATING	A2-s1,d0 (EN 13501-1)



Architectural Woven Wire Mesh

MS-45

WIRE DIAMETER	1,0 mm
COMPOSITION	AISI 316L Stainless steel
MESH PITCH	4 × 4 mm
WEAVE TYPE	Square (Plain weave)
OPEN AREA	≈ 36 %
FIRE RATING	A1 (EN 13501-1)



Large Mesh Woven Wire

MS – 4 6


WIRE DIAMETER	2,0 mm
COMPOSITION	AISI 304 Stainless steel
MESH PITCH	10 × 10 mm
WEAVE TYPE	Square (Plain weave)
OPEN AREA	≈ 64 %
FIRE RATING	A1 (EN 13501-1)



Spiral Crimp Mesh (Spiral Crimp)

MS – 4 7


WIRE DIAMETER	3,0 mm
COMPOSITION	AISI 316 Stainless steel
MESH PITCH	20 × 20 mm
WEAVE TYPE	Crimp (reinforced crimp)
OPEN AREA	≈ 50 %
FIRE RATING	A1 (EN 13501-1)

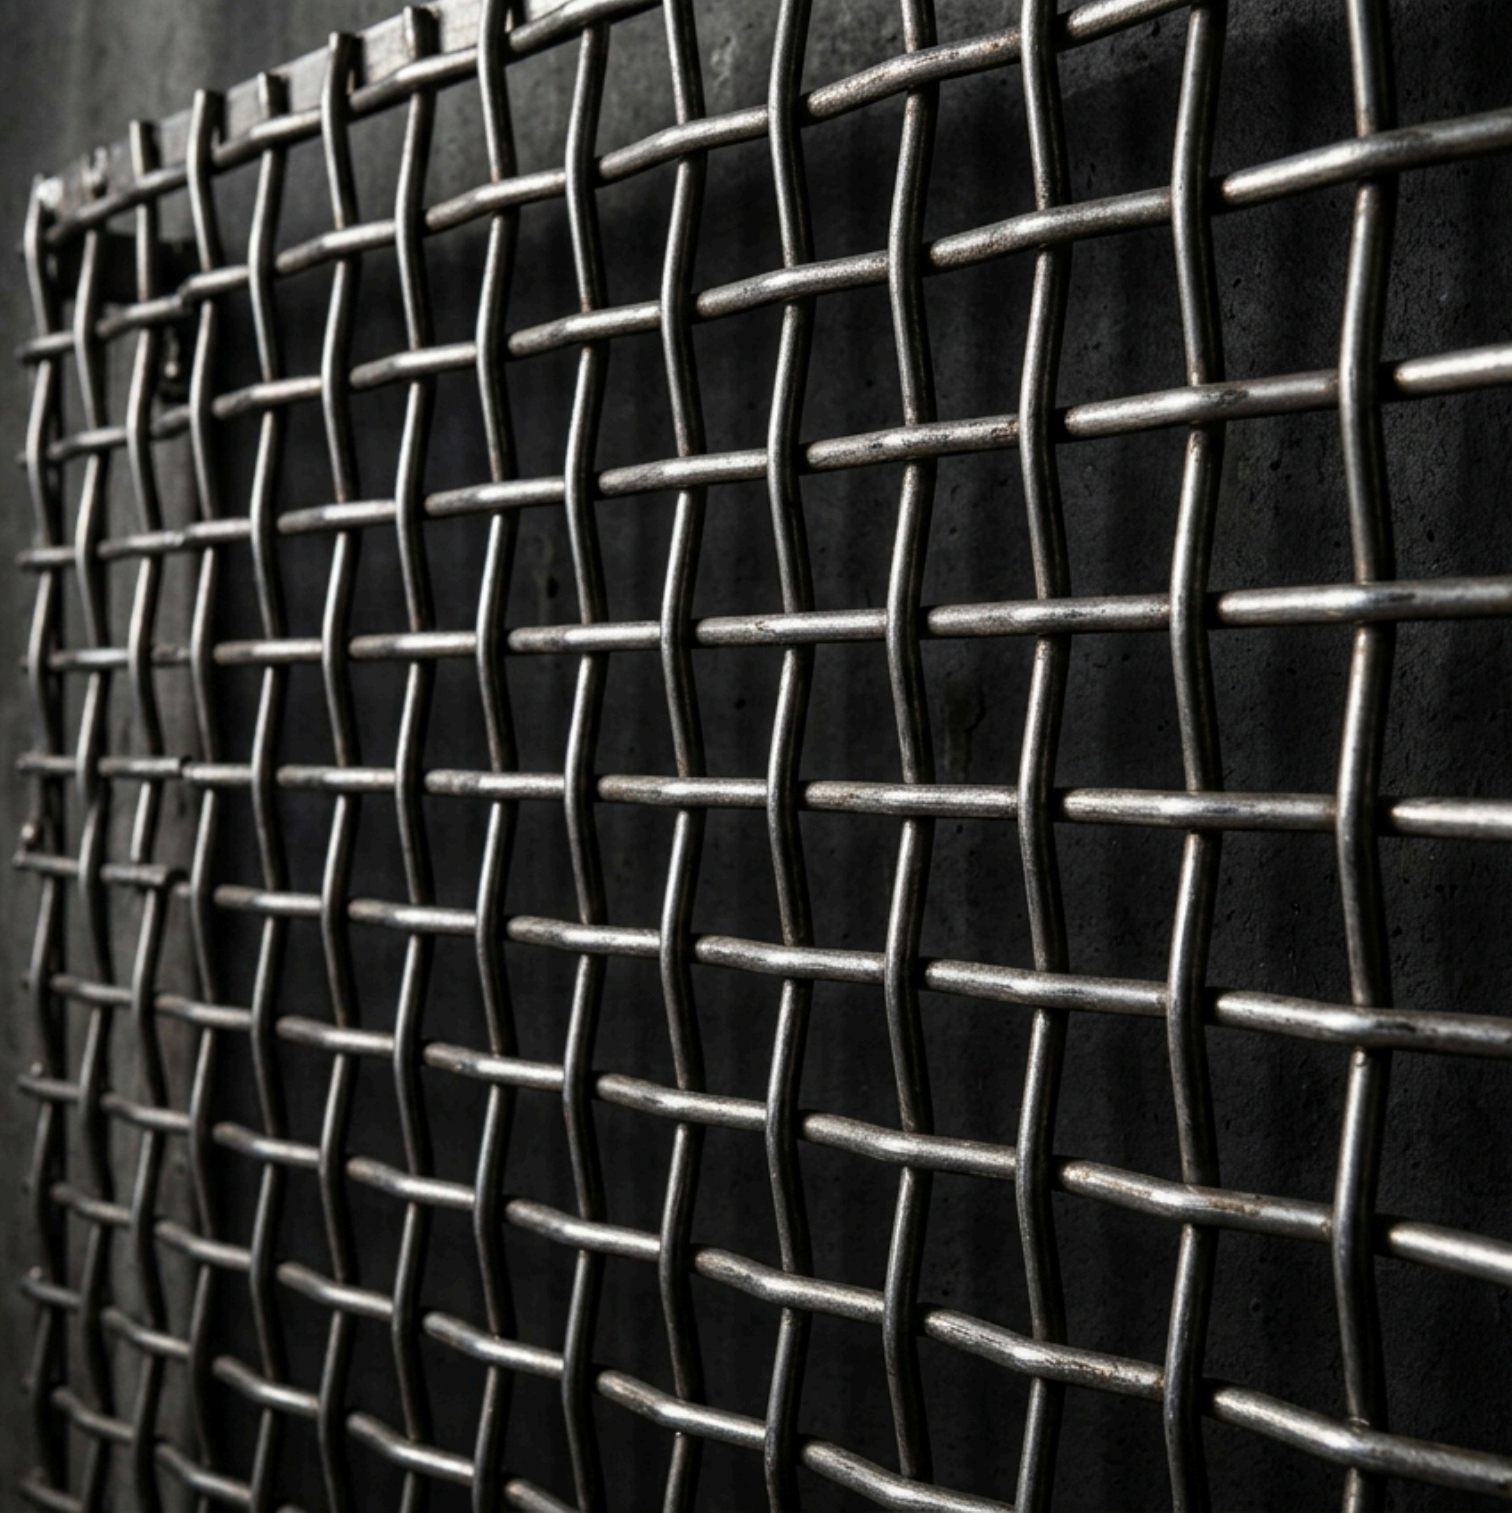

Tensile Architectural Cable Mesh

MS – 4 8

WIRE DIAMETER	1.5 mm (cable 7×7)
COMPOSITION	AISI 316 Stainless steel
MESH PITCH	50 × 50 mm
WEAVE TYPE	Cable mesh, rhombus
OPEN AREA	≈ 88 %
FIRE RATING	A1 (EN 13501-1)

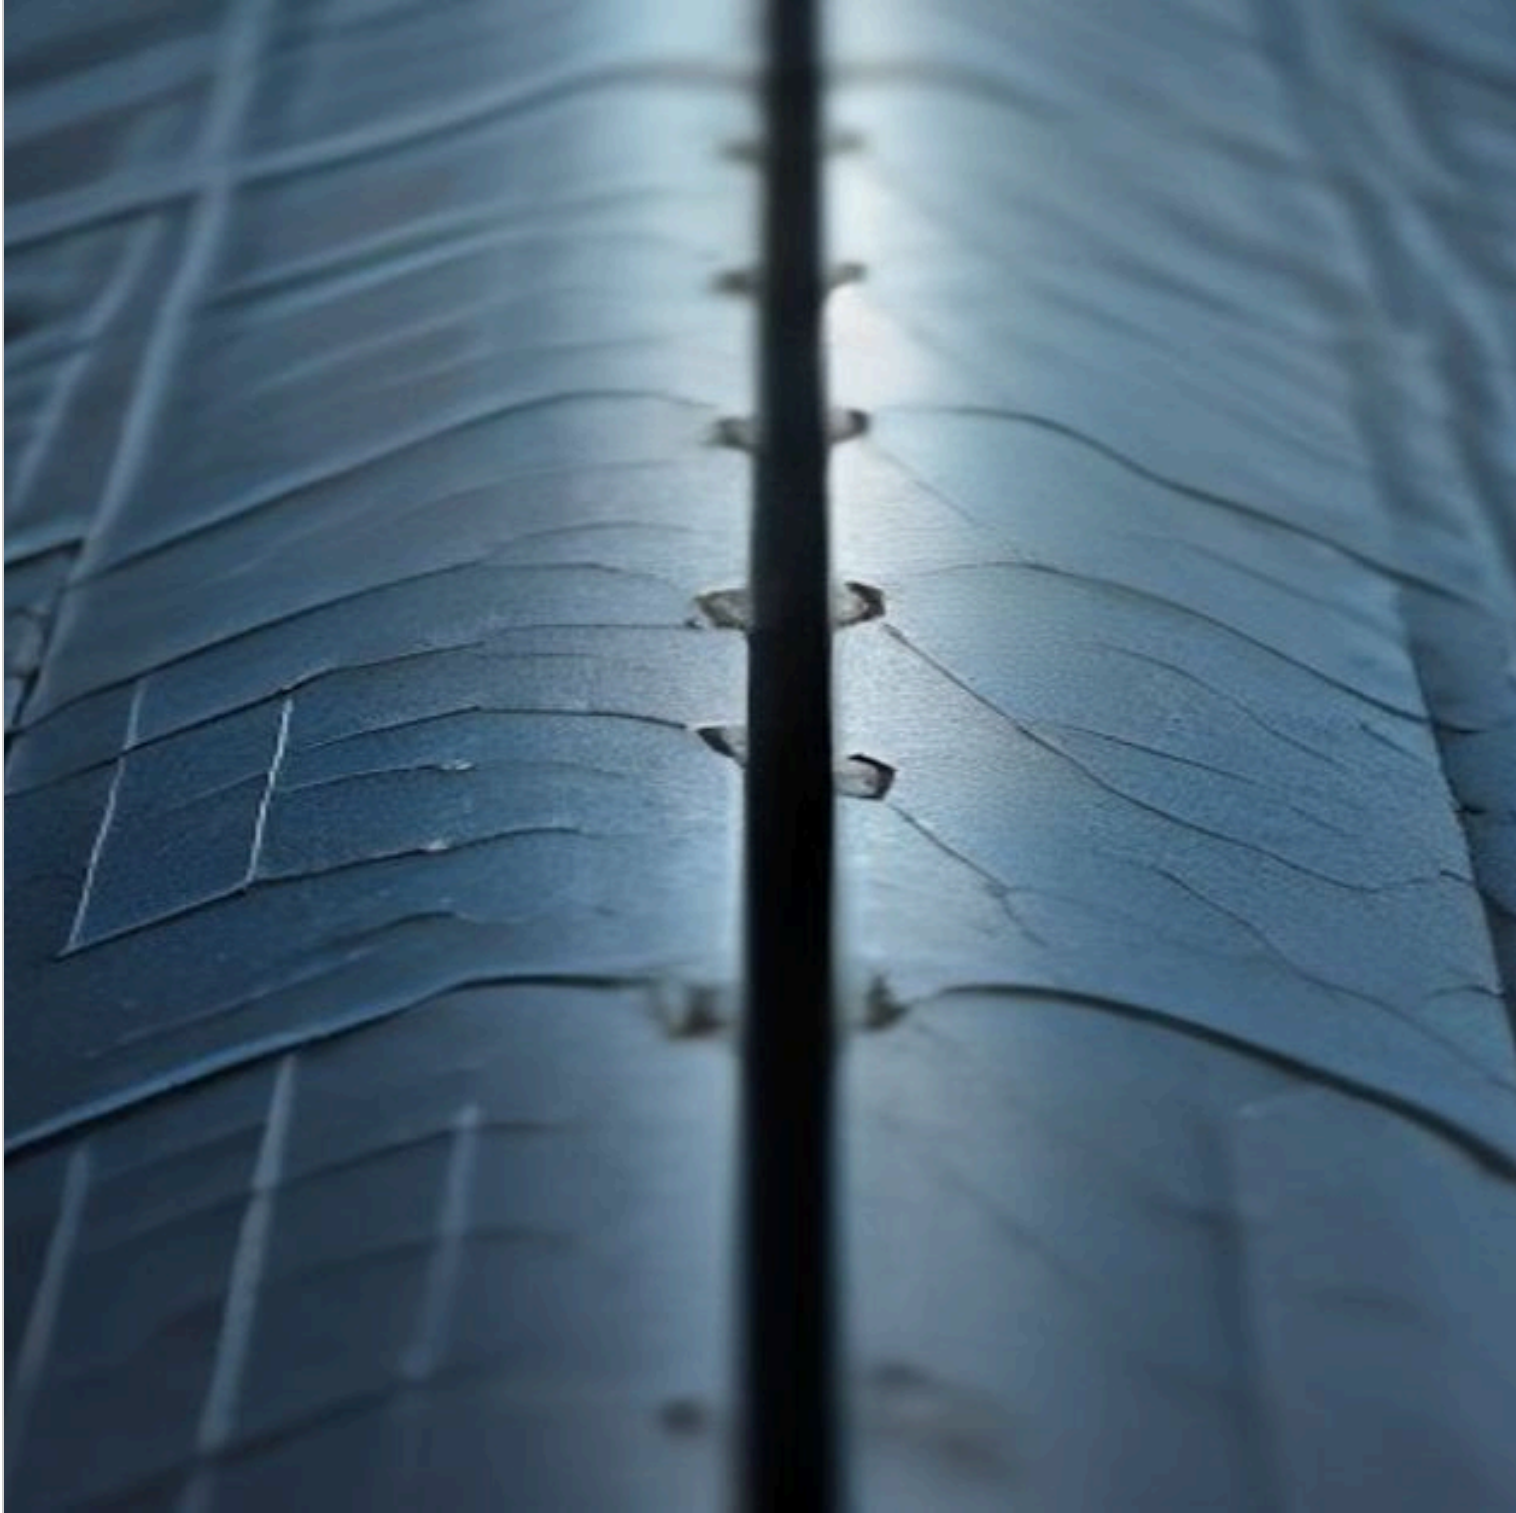

PVC Coated Architectural Mesh


MS-49

WIRE DIAMETER	2.0 mm (2.8 mm shell)
COMPOSITION	Galvanized steel + PVC coating
MESH PITCH	25 × 25 mm
WEAVE TYPE	Square (Plain weave)
PVC JACKET COLOR	RAL 6009 (dark green)
FIRE RATING	B-s2,d0 (EN 13501-1)

Round Hole Perforated Metal Sheet

PF-45

SHEET THICKNESS	1.5 mm
ALLOY / COMPOSITION	AlMg3 (EN AW-5754)
HOLE DIAMETER	Ø 6.0 mm
HOLE PITCH	9.0 mm (staggered pitch)
OPEN AREA	≈ 40 %
FIRE RATING	A2-s1,d0 (EN 13501-1)

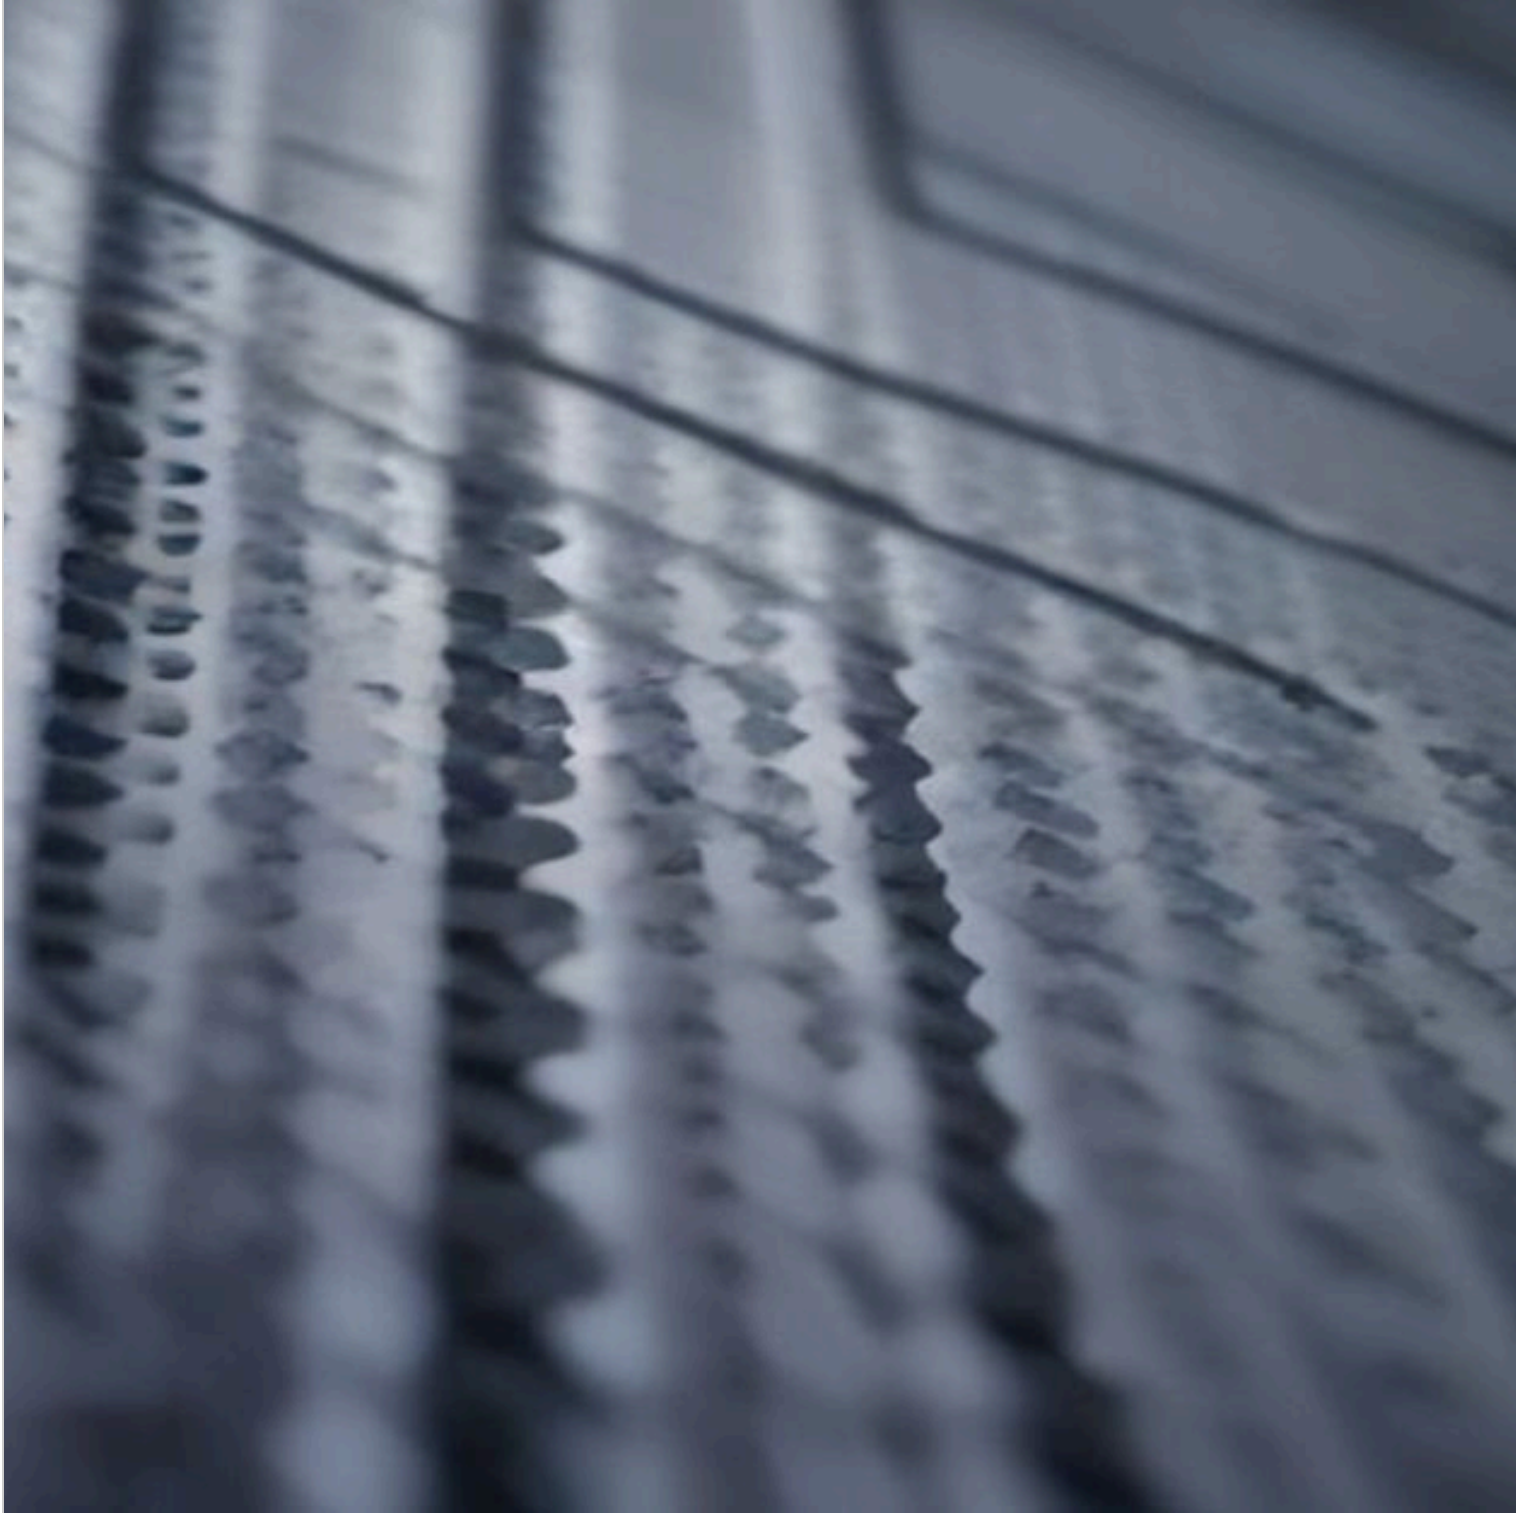

Slotted Hole Perforated Metal Sheet

PF-46


SHEET THICKNESS	2.0 mm
ALLOY / COMPOSITION	S235JR (Galvanized steel)
HOLE SIZE	5 × 20 mm (slot)
HOLE PITCH	8 × 25 mm
OPEN AREA	≈ 50 %
FIRE RATING	A1 (EN 13501-1)



Hexagonal Honeycomb Perforated Sheet

PF-47


SHEET THICKNESS	1.5 mm
ALLOY / COMPOSITION	AlMg1 (EN AW-5005)
HOLE SIZE	Ø (wrench) 8.0 mm
HOLE PITCH	10.0 mm (honeycomb pattern)
OPEN AREA	≈ 56 %
FIRE RATING	A2-s1,d0 (EN 13501-1)

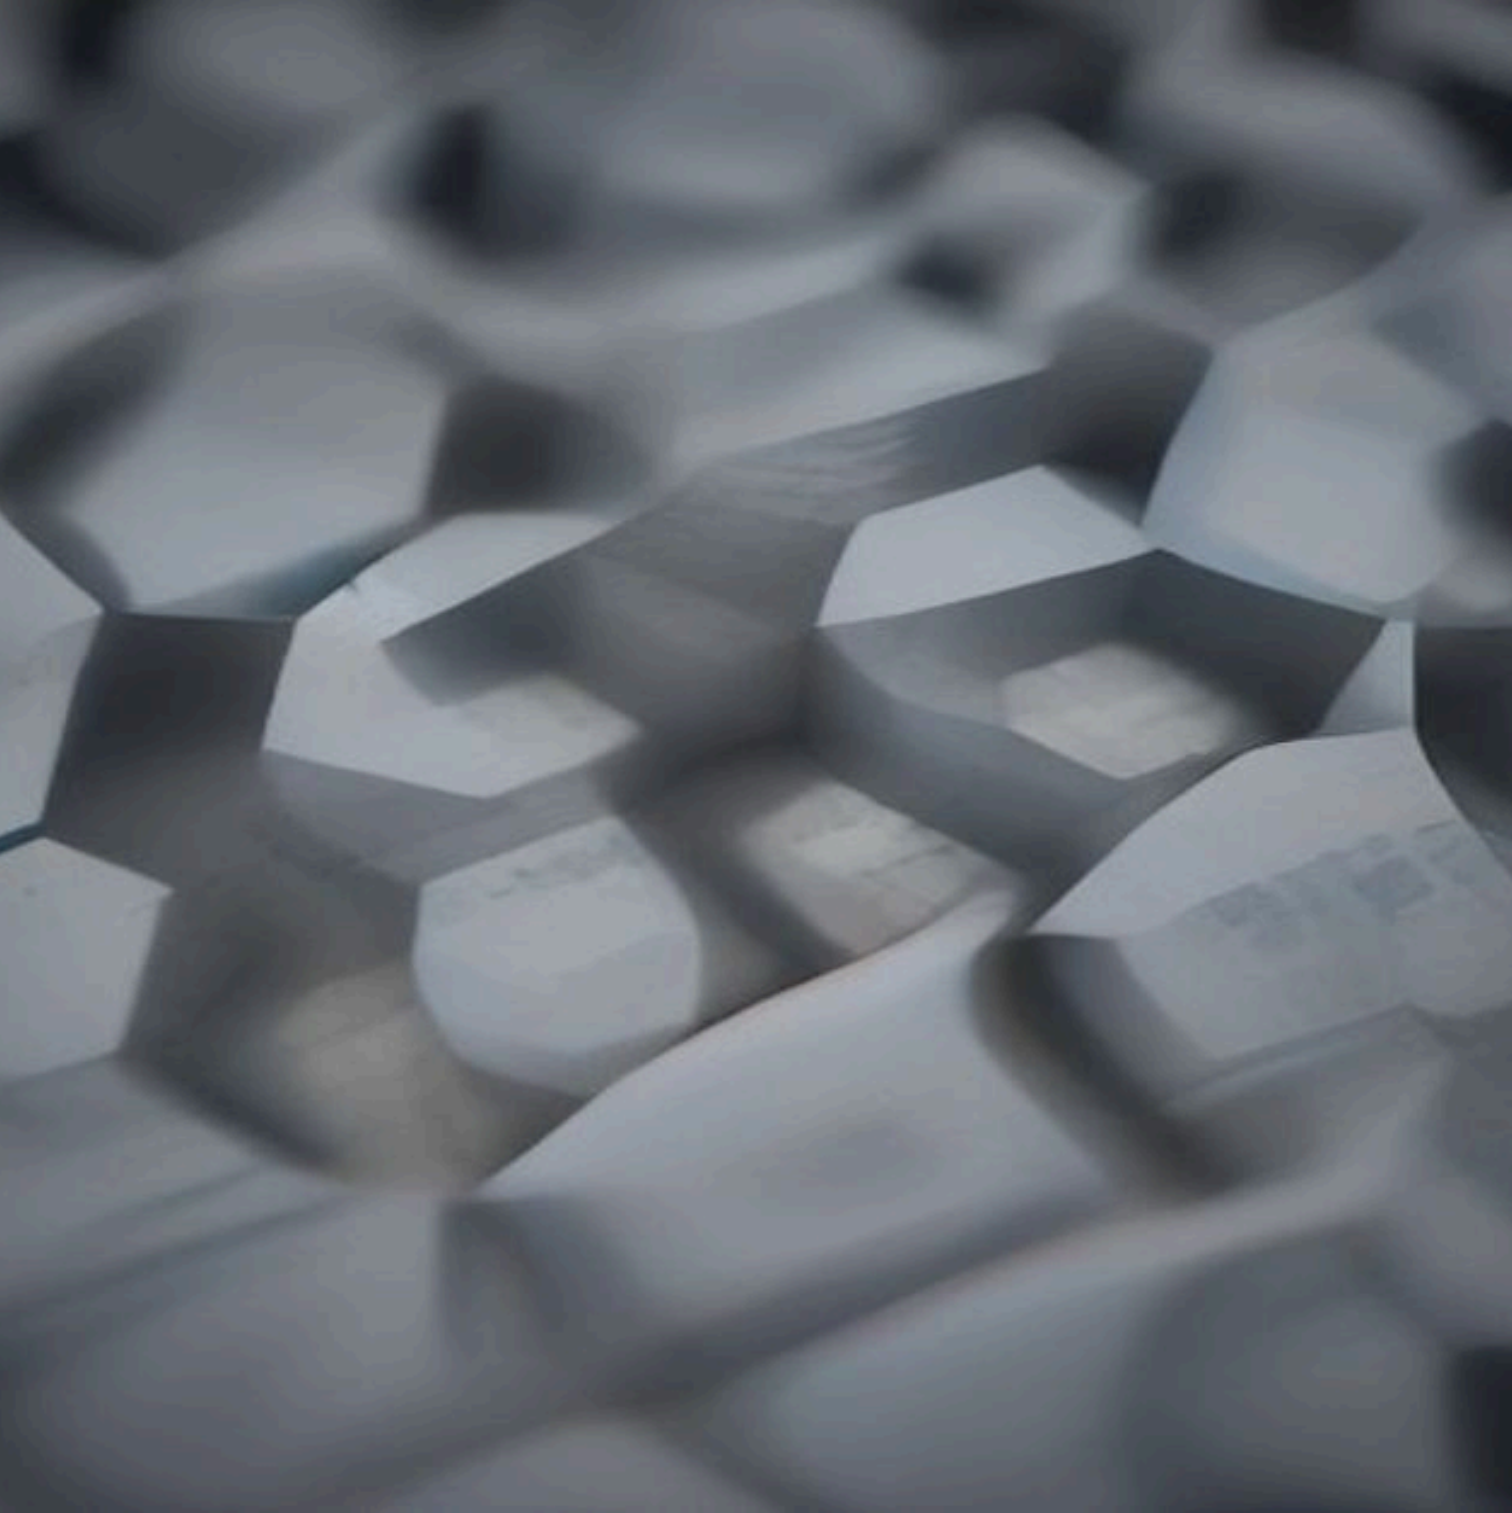

Mirror Polished Stainless Steel Perforated Sheet

PF-48

SHEET THICKNESS	1.2 mm
ALLOY / COMPOSITION	AISI 304 (EN 1.4301)
HOLE DIAMETER	Ø 4.0 mm
HOLE PITCH	6.0 mm (staggered pitch)
SURFACE FINISH	Mirror BA Finish
FIRE RATING	A1 (EN 13501-1)

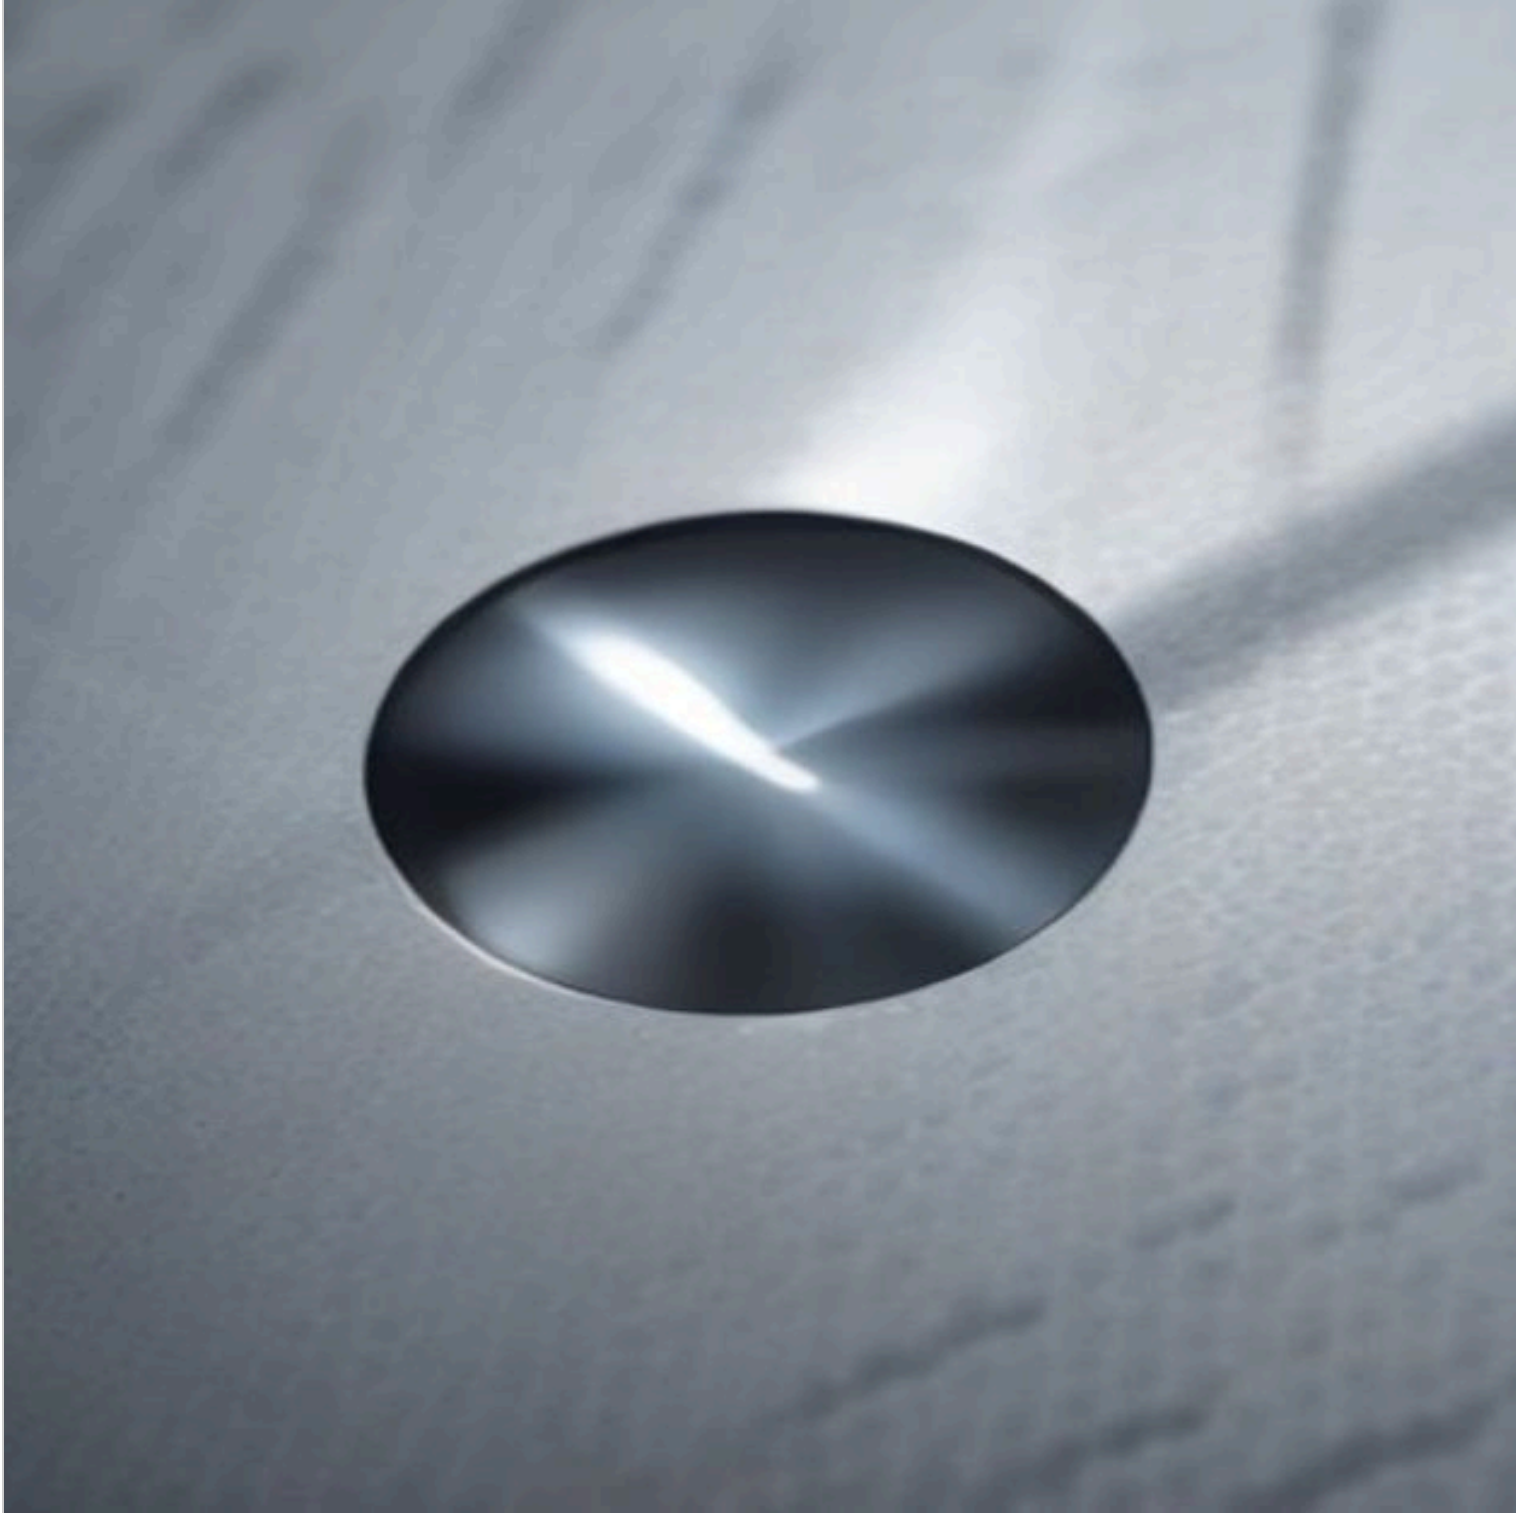

Fine Round Hole Perforated Sheet

PF-49


SHEET THICKNESS	1.0 mm
ALLOY / COMPOSITION	AISI 304 Stainless steel
HOLE DIAMETER	Ø 2.0 mm
HOLE PITCH	3.0 mm (staggered pitch)
OPEN AREA	≈ 35 %
FIRE RATING	A1 (EN 13501-1)



Standard Aluminum Composite Panel (ACM)

CMP-45

TOTAL THICKNESS	4.0 mm
SKIN ALLOY	AlMn1 (EN AW-3003), 0.5 mm
CORE MATERIAL	Polyethylene FR (fire retardant)
FINISH / COATING	PVDF Kynar 500, White RAL 9010
BENDING RADIUS (MIN)	R = 200 mm
FIRE RATING	B-s1,d0 (EN 13501-1)

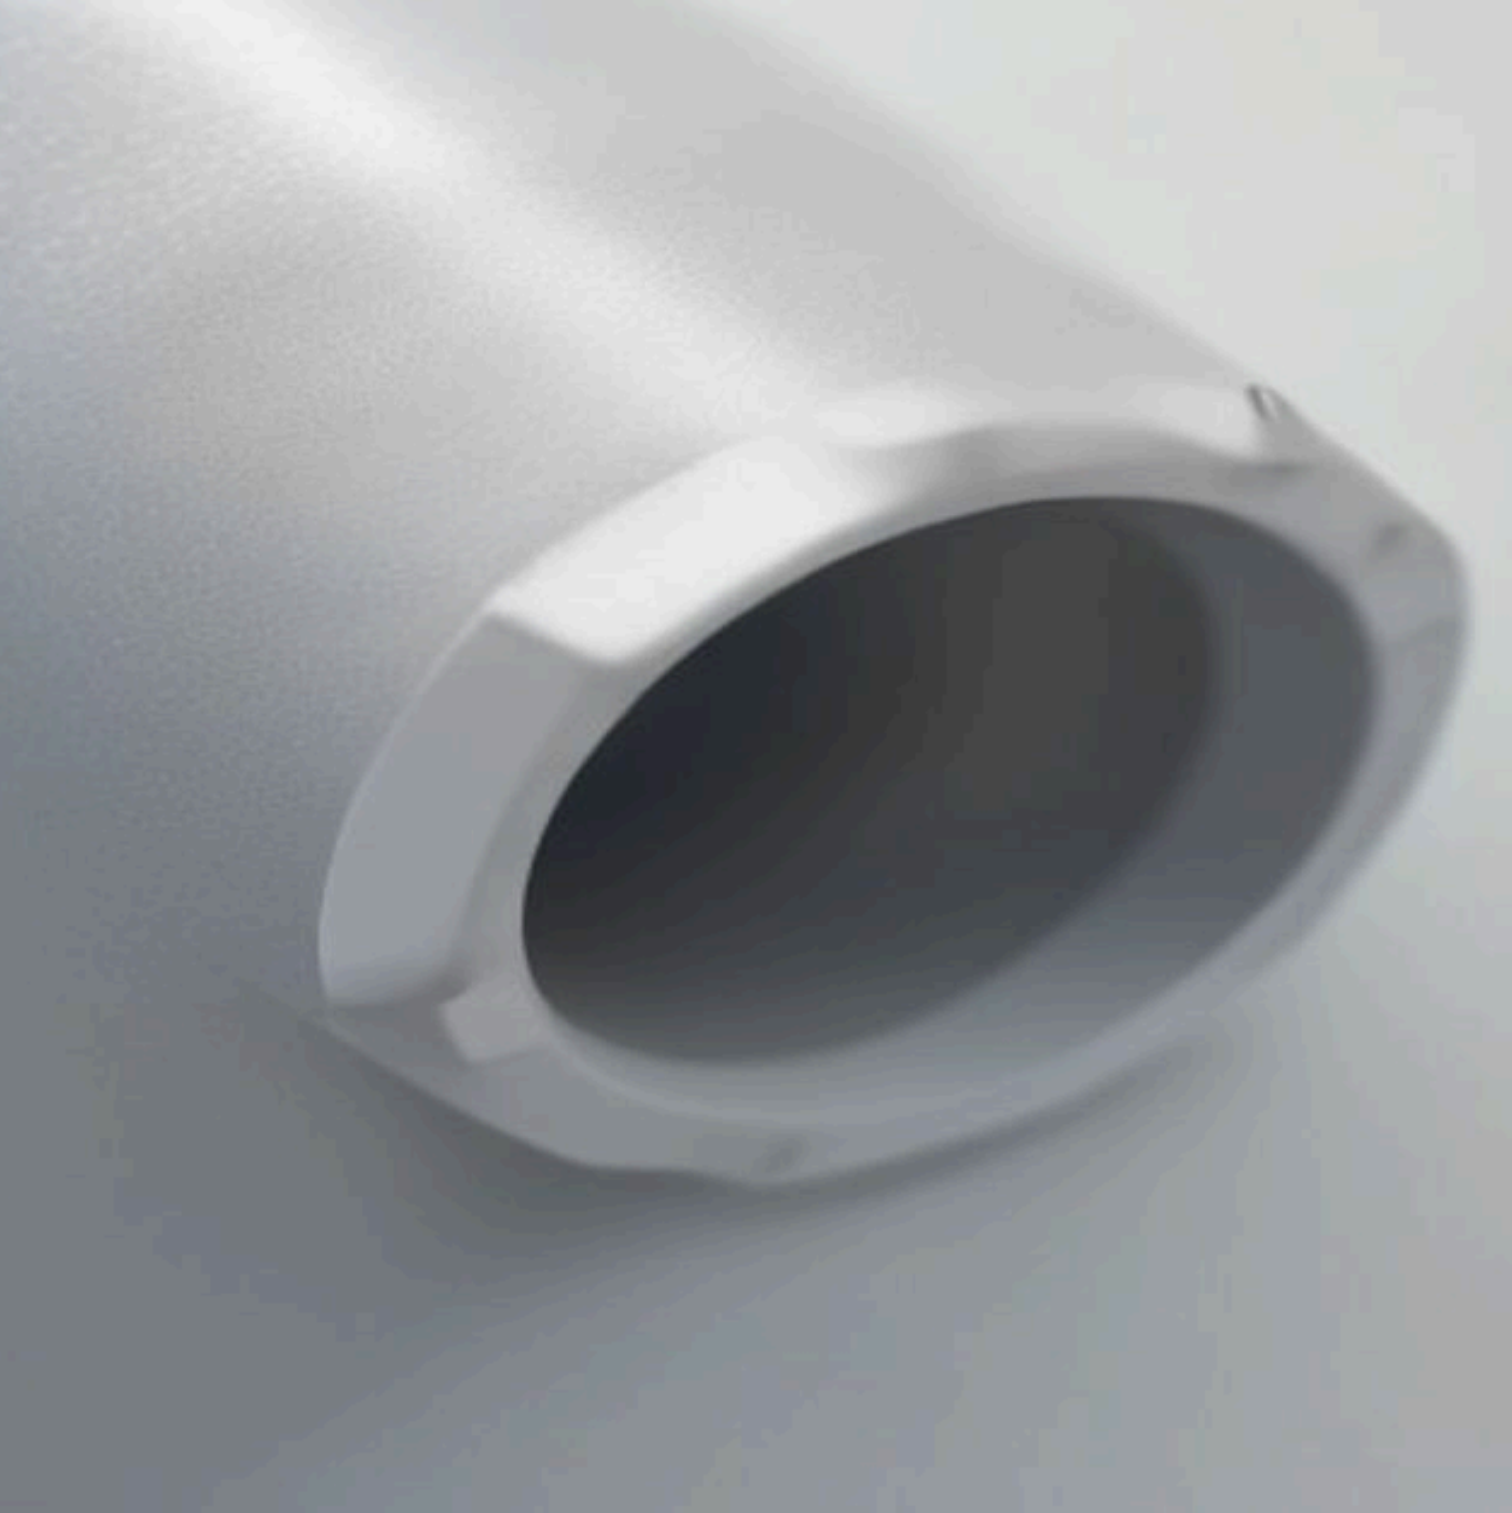

A2 Fire-Rated Aluminum Composite Panel

CMP-46

TOTAL THICKNESS	4.0 mm
SKIN ALLOY	AlMg1 (EN AW-5005), 0.5 mm
CORE MATERIAL	Non-combustible Mineral
FINISH / COATING	PVDF Kynar 500, Anthracite RAL 7016
BUILDING CLASS (MAX)	Any (no restrictions)
FIRE RATING	A2-s1,d0 (EN 13501-1)



Wood Grain Finish Aluminum Composite Panel

CMP-47

TOTAL THICKNESS	4.0 mm
SKIN ALLOY	AlMn1 (EN AW-3003), 0.5 mm
CORE MATERIAL	Polyethylene FR
FINISH / COATING	UV Digital Print, Oak Wood Imitation
UV RESISTANCE	≥ 10 years without fading
FIRE RATING	B-s1,d0 (EN 13501-1)



Stone Texture Aluminum Composite Panel

CMP-48

TOTAL THICKNESS	4.0 mm
SKIN ALLOY	AlMn1 (EN AW-3003), 0.5 mm
CORE MATERIAL	Polyethylene FR
FINISH / COATING	UV Digital Print, Marble Imitation
UV RESISTANCE	≥ 10 years without fading
FIRE RATING	B-s1,d0 (EN 13501-1)



Standard Exterior HPL Facade Panel

HPR-45

THICKNESS	8.0 mm
COMPOSITION	Kraft pulp + phenolic resin
SURFACE FINISH	HPL Compact, Matte, gray
DENSITY	≈ 1 380 kg/m³
WATER ABSORPTION	≤ 1.5 % (EN 438-2)
FIRE RATING	B-s2,d0 (EN 13501-1)



Wood Grain Exterior HPL Panel

HPR-46

THICKNESS	10.0 mm
COMPOSITION	Kraft pulp + melamine resin
SURFACE FINISH	Wood texture (embossed), walnut
DENSITY	≈ 1.380 kg/m³
WATER ABSORPTION	≤ 2.0 % (EN 438-2)
FIRE RATING	B-s2,d0 (EN 13501-1)



High-Gloss Solid Color Exterior HPL Panel

HPR-47

THICKNESS	6.0 mm
COMPOSITION	Kraft pulp + melamine resin
SURFACE FINISH	Mirror gloss, blue RAL 5010
DENSITY	≈ 1.380 kg/m ³
GLOSS LEVEL (60°)	≥ 85 GU (EN ISO 2813)
FIRE RATING	B-s2,d0 (EN 13501-1)



Terracotta Texture Exterior HPL Panel

HPR-48

THICKNESS	8.0 mm
COMPOSITION	Kraft pulp + phenolic resin
SURFACE FINISH	Terracotta, leather embossing
DENSITY	≈ 1.380 kg/m³
WATER ABSORPTION	≤ 1.5 % (EN 438-2)
FIRE RATING	B-s2,d0 (EN 13501-1)



Trapezoidal Corrugated Metal Sheet T-18

DM-50


SHEET THICKNESS	0.65 mm
ALLOY / COMPOSITION	AlMg3 (EN AW-5754)
TRAPEZOID PITCH	150 mm
PROFILE HEIGHT	18.0 mm
FINISH / COATING	PVDF Alucoat, champagne RAL 1015
FIRE RATING	A2-s1,d0 (EN 13501-1)



Trapezoidal Corrugated Metal Sheet T-35

DM-51

SHEET THICKNESS	1.2 mm
ALLOY / COMPOSITION	S350GD+Z275 (Galvanized steel)
TRAPEZOID PITCH	200 mm
PROFILE HEIGHT	35.0 mm
FINISH / COATING	Polyester RAL 6005 (dark green)
FIRE RATING	A1 (EN 13501-1)

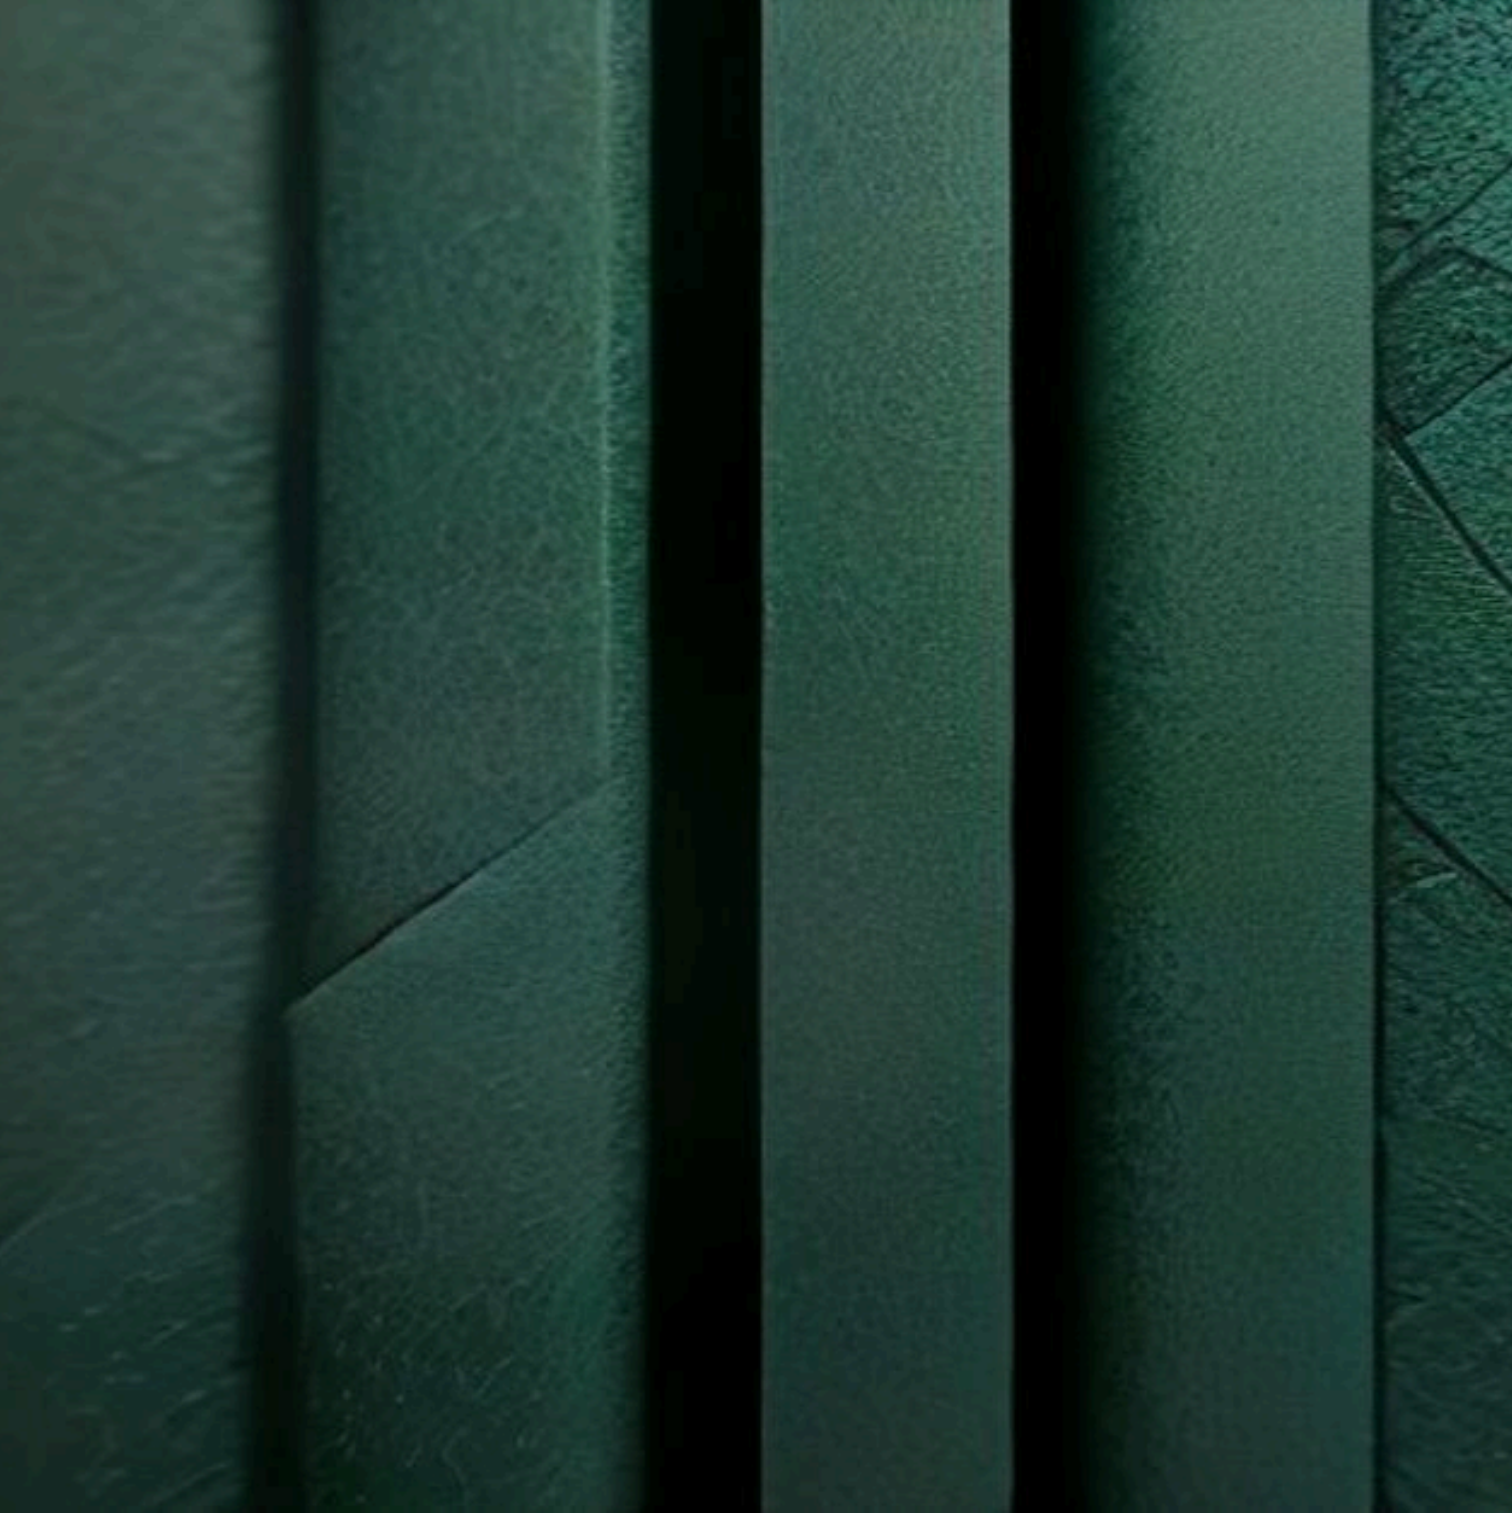

Fine Ribbed Corrugated Metal Sheet

DM-52

SHEET THICKNESS	0.8 mm
ALLOY / COMPOSITION	AlMg1 (EN AW-5005)
RIB PITCH	8 mm
RIB HEIGHT	2.0 mm
FINISH / COATING	Anodizing, natural silver
FIRE RATING	A2-s1,d0 (EN 13501-1)



Curved Profile Corrugated Metal Sheet

DM-53

SHEET THICKNESS	1.0 mm
ALLOY / COMPOSITION	AlMg3 (EN AW-5754)
PROFILE TYPE	Arched, R = 2 000 mm
WAVE HEIGHT	5.0 mm, pitch 20 mm
FINISH / COATING	PVDF, terracotta RAL 8004
FIRE RATING	A2-s1,d0 (EN 13501-1)



Titanium-Zinc Corrugated Facade Sheet

DM-54

SHEET THICKNESS	0.7 mm
ALLOY / COMPOSITION	Zn-Ti-Cu (EN 988)
WAVE PITCH	16 mm
WAVE HEIGHT	4.0 mm
SURFACE FINISH	Natural patina Anthra-Zinc
FIRE RATING	A1 (EN 13501-1)



Micro-Mesh Decorative Expanded Metal

XP-60

STRAND THICKNESS	0.5 mm
ALLOY / COMPOSITION	AlMg3 (EN AW-5754)
MESH SWM × LWM	5 × 10 mm
STRAND WIDTH	0.8 mm
OPEN AREA	≈ 60 %
FIRE RATING	A2-s1,d0 (EN 13501-1)



Flattened Stainless Steel Expanded Metal

XP-61


STRAND THICKNESS	1.5 mm
ALLOY / COMPOSITION	AISI 316L (EN 1.4404)
MESH SWM × LWM	12 × 24 mm
STRAND WIDTH	2.0 mm
OPEN AREA	≈ 52 %
FIRE RATING	A1 (EN 13501-1)



Architectural Copper Expanded Metal

XP-62


STRAND THICKNESS	0.8 mm
ALLOY / COMPOSITION	Cu-DHP (Copper, EN 1173)
MESH SWM × LWM	8 × 16 mm
STRAND WIDTH	1.5 mm
OPEN AREA	≈ 55 %
FIRE RATING	A1 (EN 13501-1)

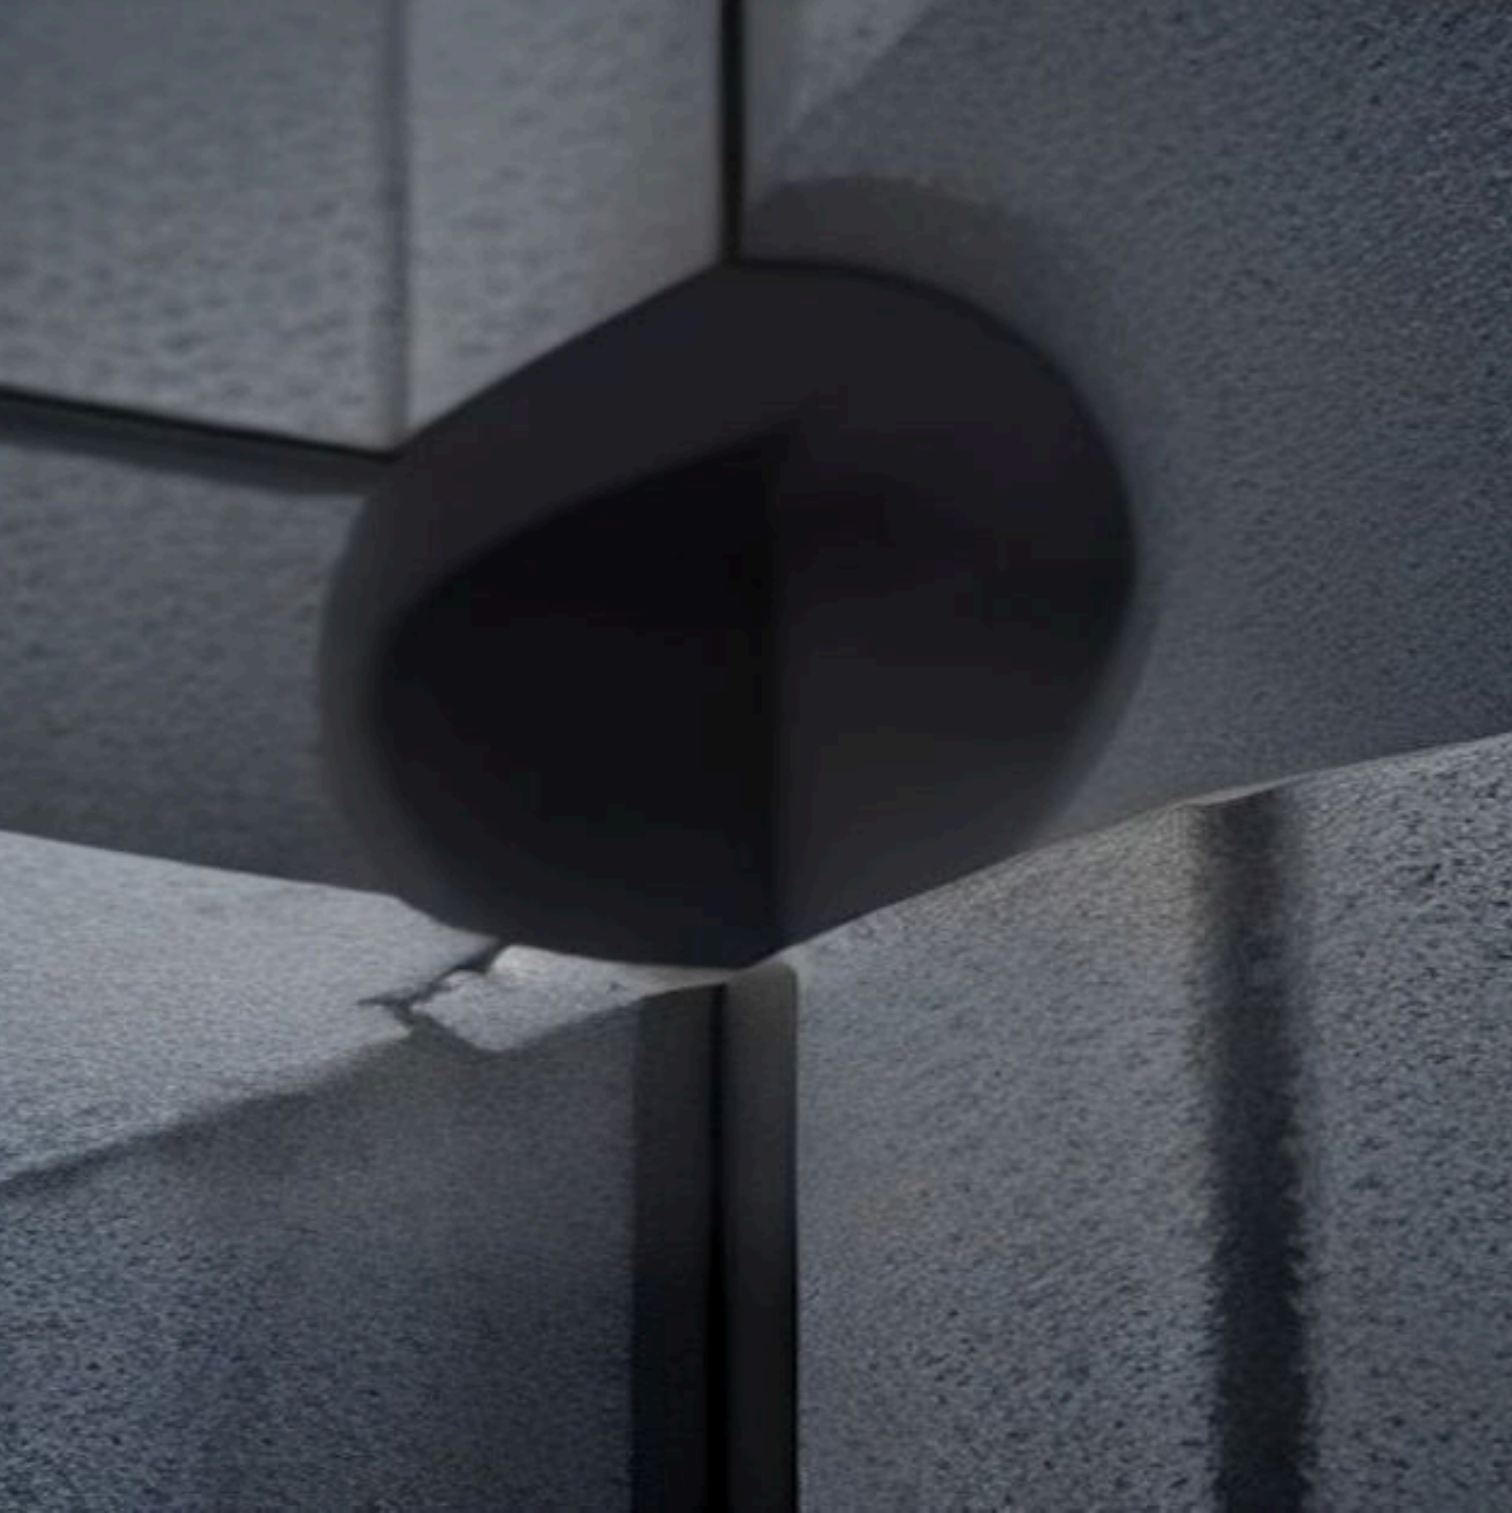

PVC Coated Expanded Metal Mesh

XP-63

STRAND THICKNESS	2.0 mm
ALLOY / COMPOSITION	S250GD+Z275 + PVC coating
MESH SWM × LWM	40 × 80 mm
STRAND WIDTH	4.0 mm
FINISH / COATING	PVC RAL 6005, dark green
FIRE RATING	B-s2,d0 (EN 13501-1)

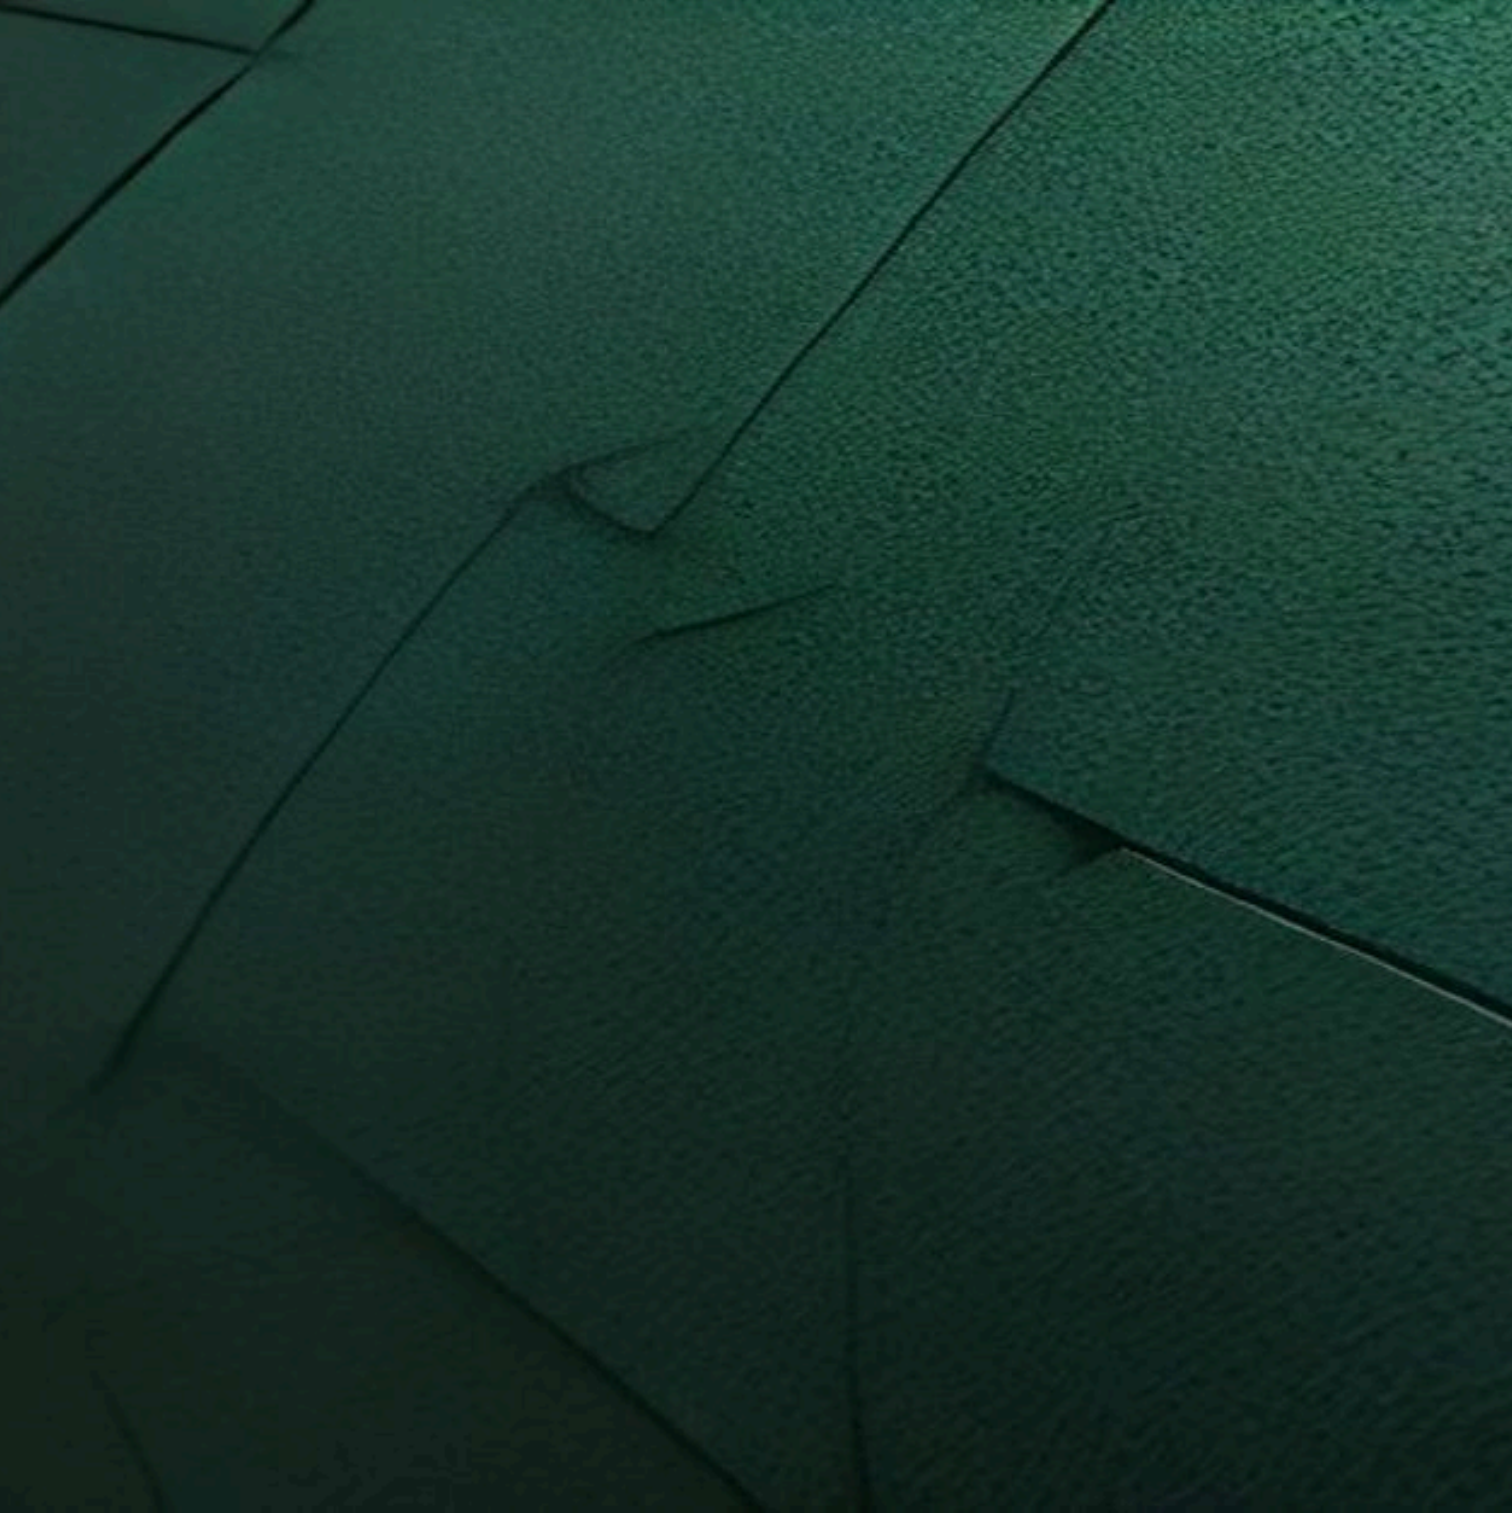

Heavy-Duty XL Expanded Metal Panel

XP-64

STRAND THICKNESS	3.0 mm
ALLOY / COMPOSITION	S355JR (structural steel)
MESH SWM × LWM	50 × 100 mm
STRAND WIDTH	6.0 mm
OPEN AREA	≈ 74 %
FIRE RATING	A1 (EN 13501-1)



Balanced Stainless Steel Wire Mesh

MS-54


WIRE DIAMETER	0.8 mm (warp) / 0.5 mm (weft)
COMPOSITION	AISI 316L Stainless steel
MESH PITCH	3 × 6 mm (rectangular)
WEAVE TYPE	Dutch Weave (Dutch)
OPEN AREA	≈ 28 %
FIRE RATING	A1 (EN 13501-1)



Decorative Chainmail Architectural Mesh

MS-55


RING DIAMETER	8.0 mm (outer)
COMPOSITION	AISI 304 Stainless steel
WIRE DIAMETER	1.2 mm
WEAVE TYPE	4-in-1 chainmail
OPEN AREA	≈ 70 %
FIRE RATING	A1 (EN 13501-1)

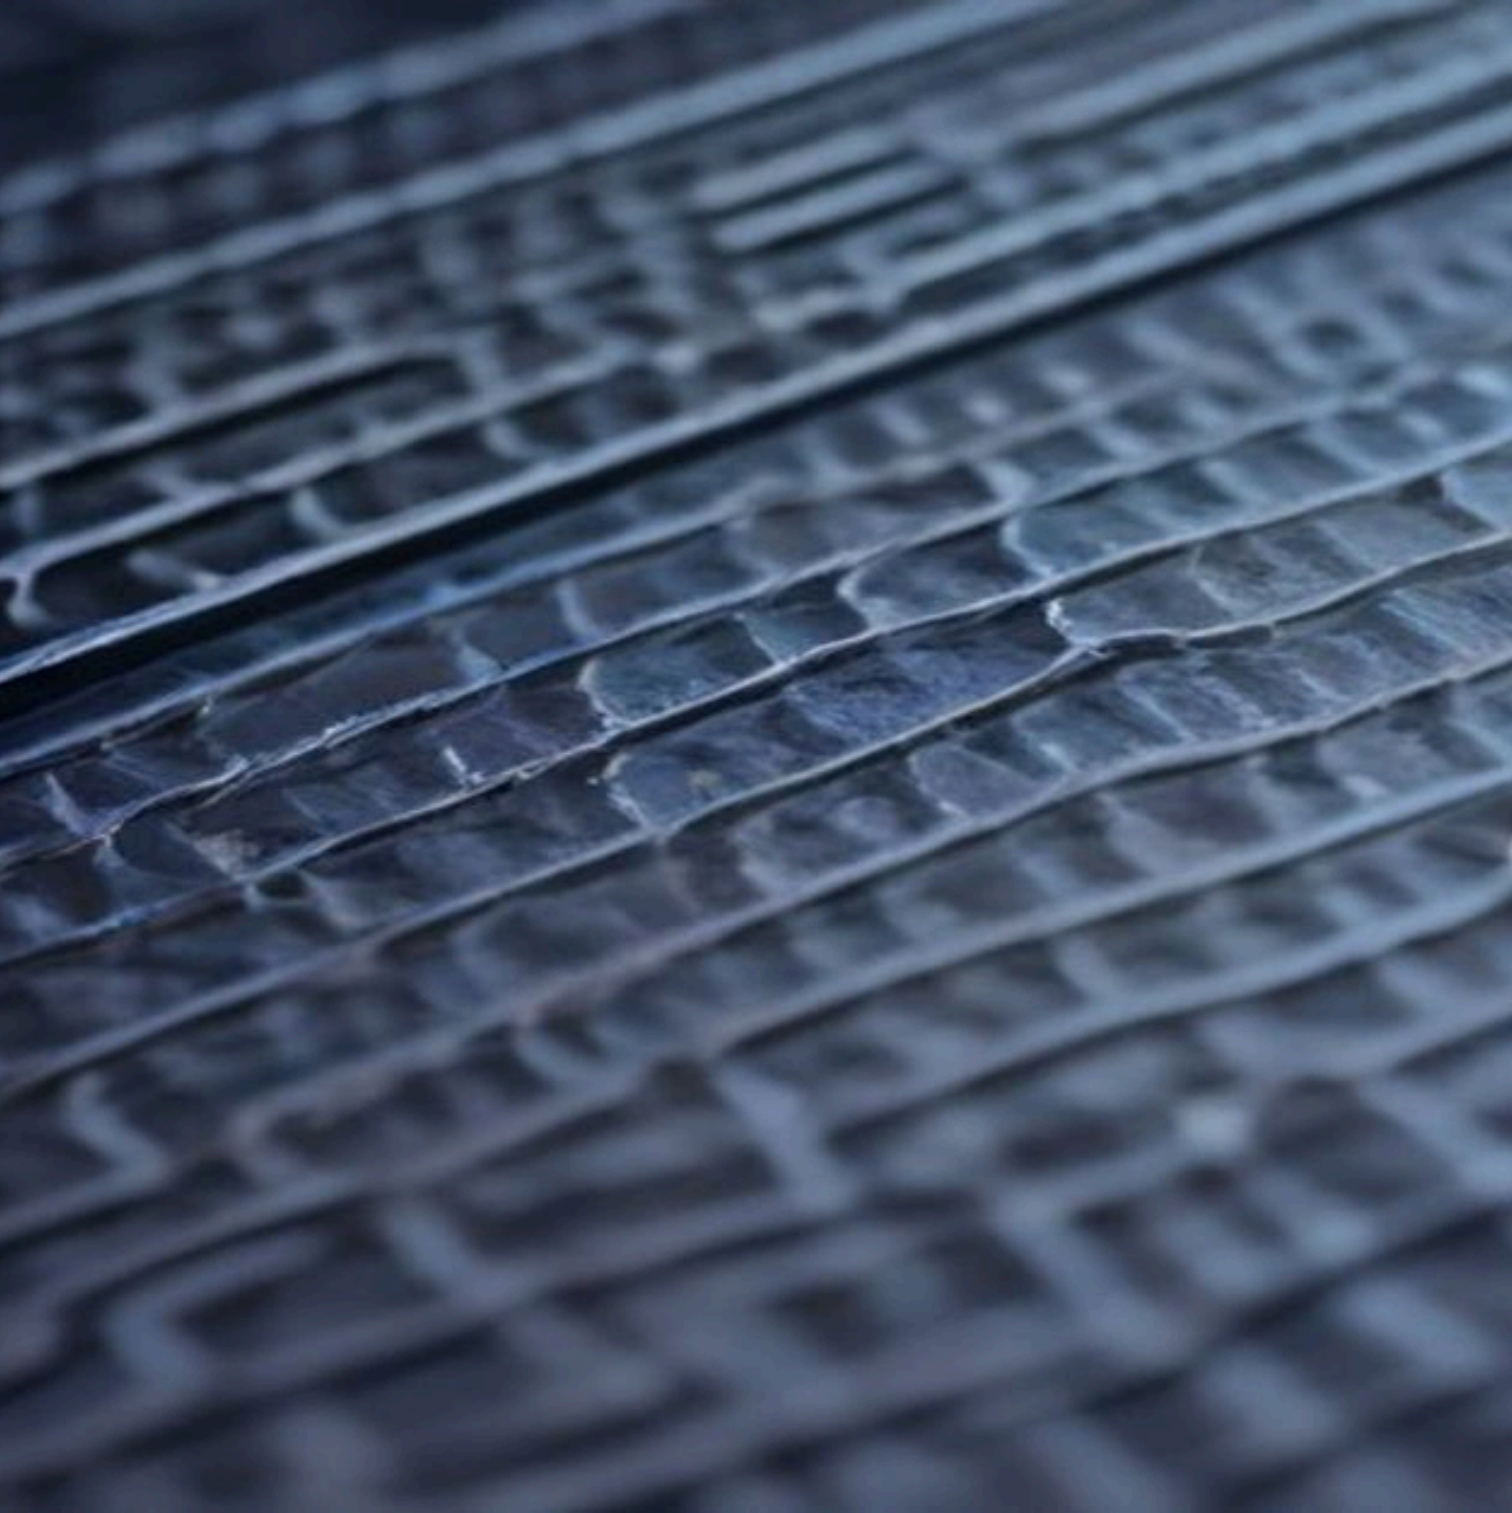

Decorative Brass Wire Mesh

MS-5 6

WIRE DIAMETER	0.6 mm
COMPOSITION	CuZn37 (Brass L63, EN 1758)
MESH PITCH	2 × 2 mm
WEAVE TYPE	Square (Plain weave)
OPEN AREA	≈ 40 %
FIRE RATING	A1 (EN 13501-1)

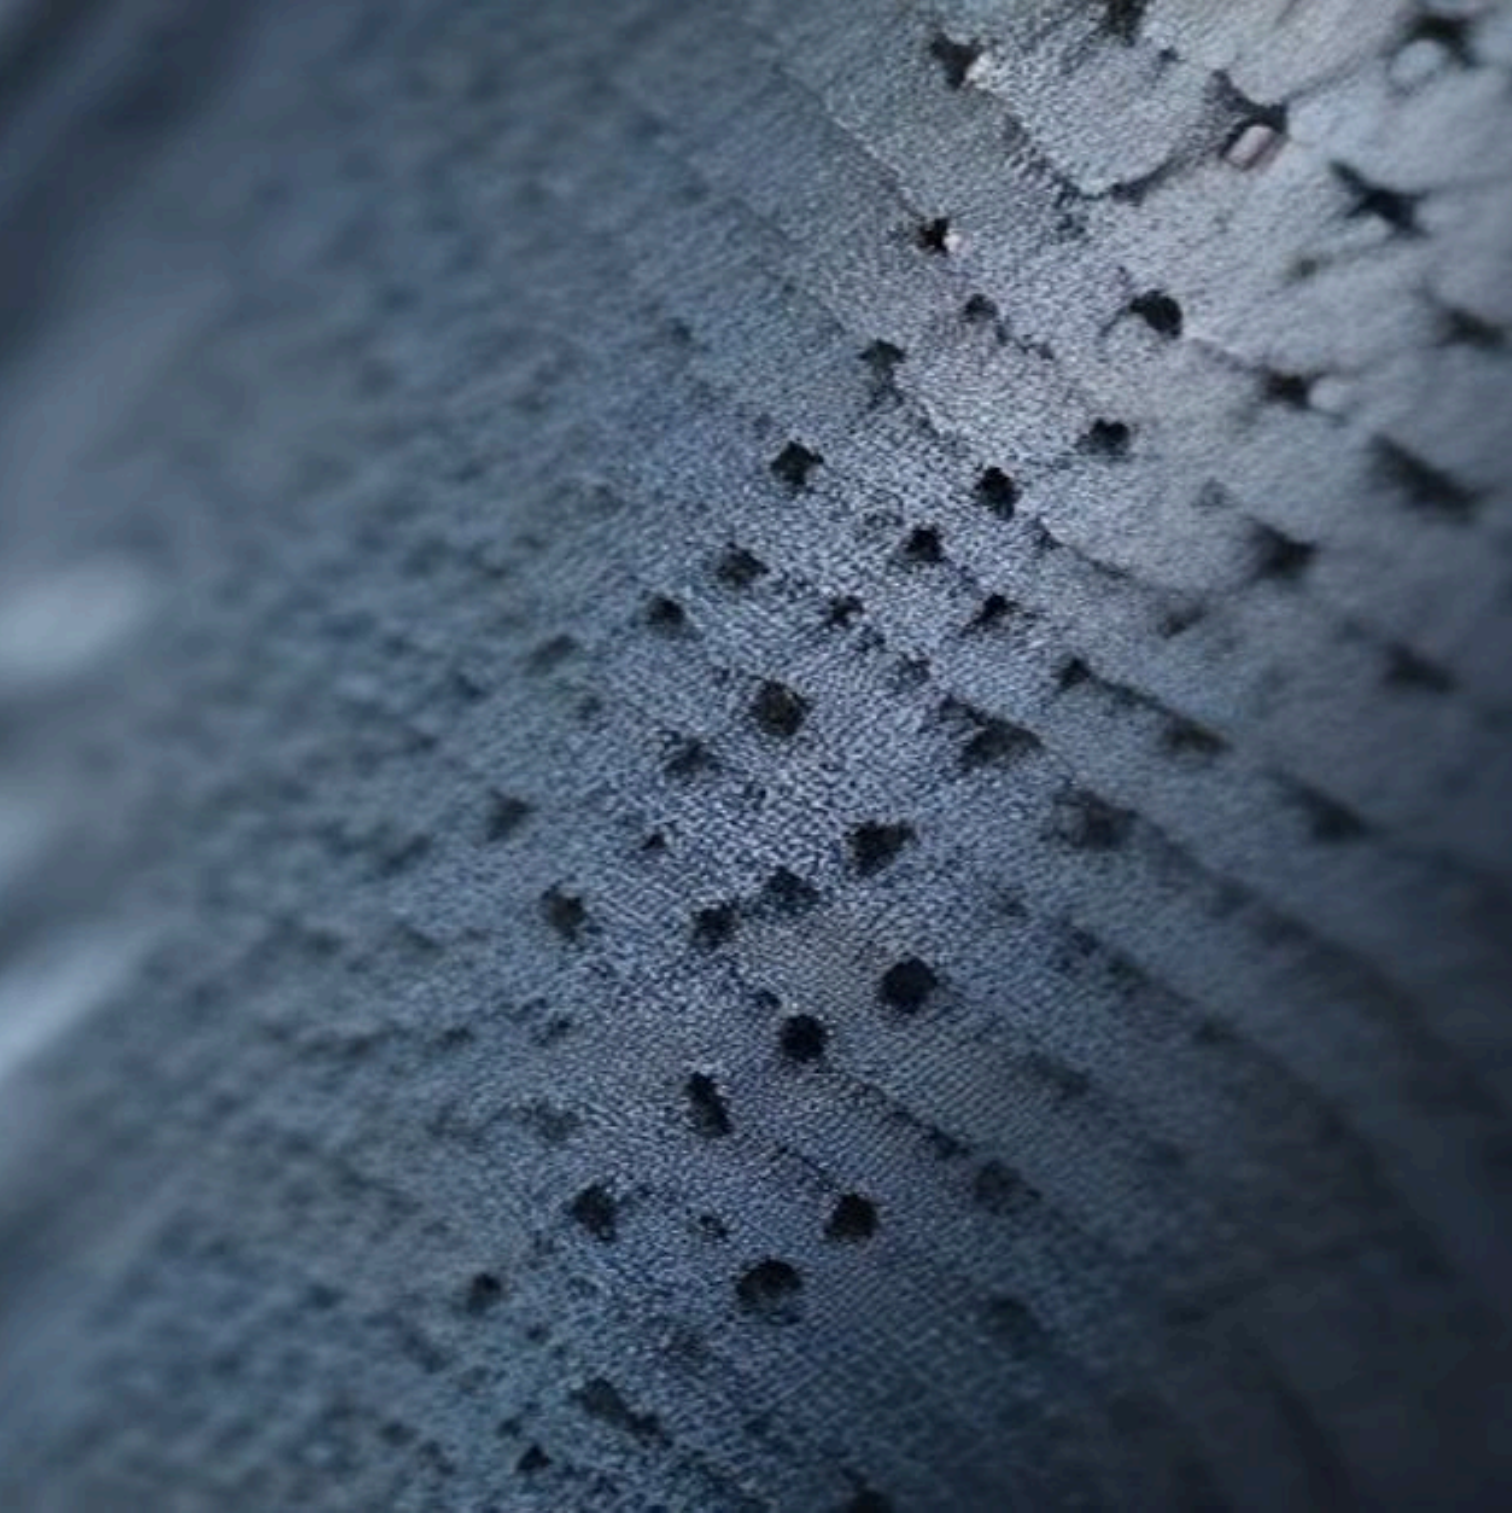

Welded Galvanized Wire Mesh

MS-57

WIRE DIAMETER	3.0 mm
COMPOSITION	St37-2G + Z200 zinc
MESH PITCH	50 × 50 mm
CONNECTION METHOD	Resistance spot welding
OPEN AREA	≈ 83 %
FIRE RATING	A1 (EN 13501-1)



Colored Architectural Wire Mesh

MS-58

WIRE DIAMETER	1.0 mm
COMPOSITION	AISI 304 + PVD coating
MESH PITCH	5 × 5 mm
WEAVE TYPE	Square (Plain weave)
PVD COLOR	Rose Gold / Champagne Gold
FIRE RATING	A1 (EN 13501-1)



Fine Round Hole Perforated Sheet

PF-49

SHEET THICKNESS	1,0 mm
ALLOY / COMPOSITION	AISI 304 Stainless steel
HOLE DIAMETER	Ø 2,0 mm
HOLE PITCH	3,0 mm (staggered pitch)
OPEN AREA	≈ 35 %
FIRE RATING	A1 (EN 13501-1)



Square Hole Perforated Metal Sheet

PF-50

SHEET THICKNESS	2.0 mm
ALLOY / COMPOSITION	AlMg3 (EN AW-5754)
HOLE SIZE	10 × 10 mm
HOLE PITCH	14 × 14 mm
OPEN AREA	≈ 51 %
FIRE RATING	A2-s1,d0 (EN 13501-1)



Large Round Hole Perforated Sheet

PF-51


SHEET THICKNESS	3.0 mm
ALLOY / COMPOSITION	S275JR (Black steel)
HOLE DIAMETER	Ø 20.0 mm
HOLE PITCH	26.0 mm (staggered pitch)
OPEN AREA	≈ 47 %
FIRE RATING	A1 (EN 13501-1)



Rhombus Hole Perforated Metal Sheet

PF-52

SHEET THICKNESS	2.0 mm
ALLOY / COMPOSITION	AlMg3 (EN AW-5754)
HOLE SIZE	8 × 15 mm (45° rhombus)
HOLE PITCH	12 × 20 mm
FINISH / COATING	Anodizing, golden bronze
FIRE RATING	A2-s1,d0 (EN 13501-1)

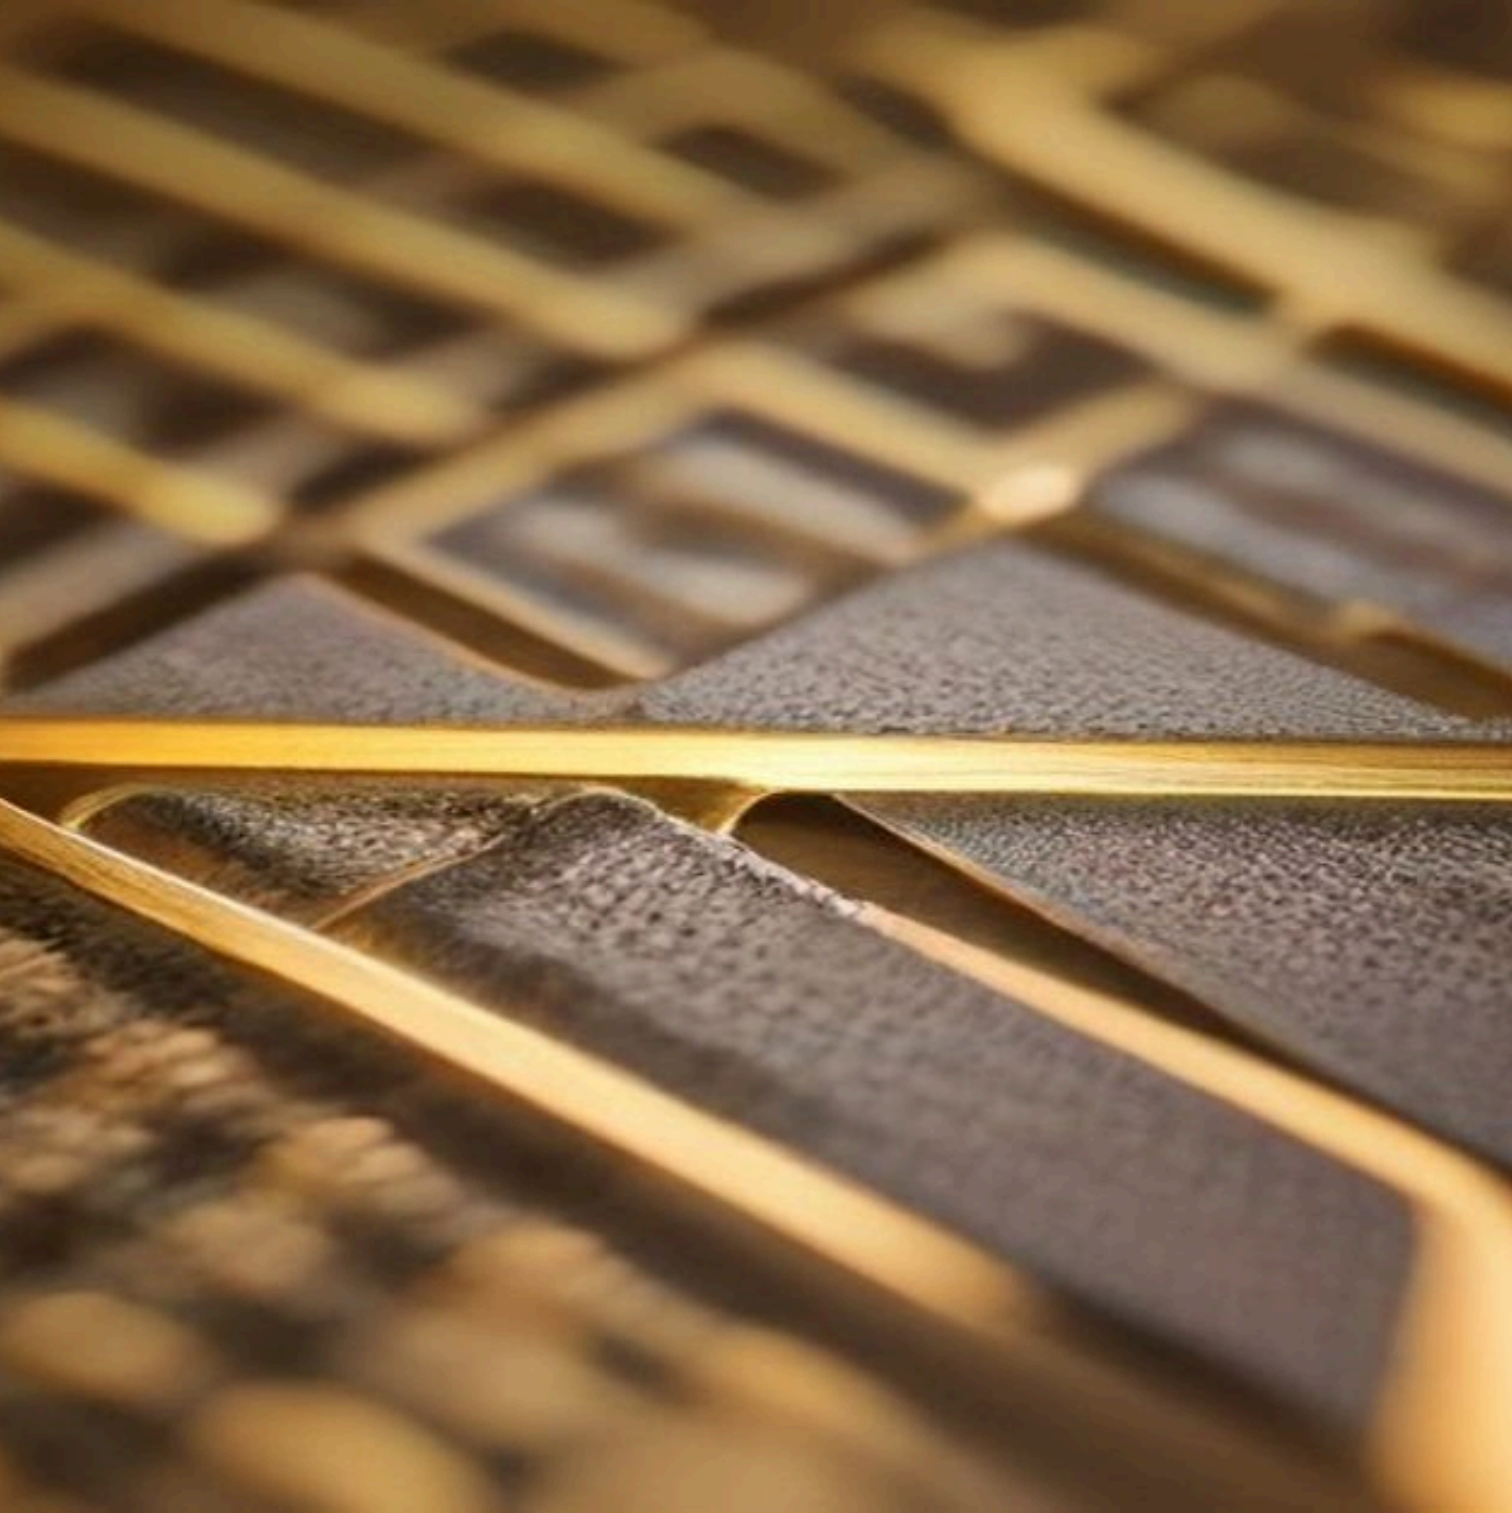

Acoustic Perforated Metal Panel

PF-53

SHEET THICKNESS	1.0 mm
ALLOY / COMPOSITION	AlMg1 (EN AW-5005)
HOLE DIAMETER	Ø 1.5 mm
HOLE PITCH	2.5 mm (staggered pitch)
OPEN AREA	≈ 28% (acoustic efficiency)
FIRE RATING	A2-s1,d0 (EN 13501-1)



Matte Solid Color Aluminum Composite Panel

CMP-49

TOTAL THICKNESS	3.0 mm
SKIN ALLOY	AlMn1 (EN AW-3003), 0.3 mm
CORE MATERIAL	Polyethylene FR (fire retardant)
FINISH / COATING	Polyester, gray RAL 7040
GLOSS LEVEL (60°)	≤ 10 GU (deep matte)
FIRE RATING	B-s1,d0 (EN 13501-1)



Metallic Finish Aluminum Composite Panel

CMP-50

TOTAL THICKNESS	4.0 mm
SKIN ALLOY	AlMg1 (EN AW-5005), 0.5 mm
CORE MATERIAL	Polyethylene FR
FINISH / COATING	PVDF Metallic, silver-gray
GLOSS LEVEL (60°)	35–50 GU (semi-gloss)
FIRE RATING	B-s1,d0 (EN 13501-1)



Concrete Effect Aluminum Composite Panel

CMP-51


TOTAL THICKNESS	4.0 mm
SKIN ALLOY	AlMn1 (EN AW-3003), 0.5 mm
CORE MATERIAL	Polyethylene FR
FINISH / COATING	UV-digital printing, concrete imitation
UV RESISTANCE	≥ 10 years without fading
FIRE RATING	B-s1,d0 (EN 13501-1)



Pearlescent Aluminum Composite Panel

CMP-52

TOTAL THICKNESS	4.0 mm
SKIN ALLOY	AlMg1 (EN AW-5005), 0.5 mm
CORE MATERIAL	Polyethylene FR
FINISH / COATING	PVDF Pearl White, pearlescent
COLOR SHIFT	White → cream (viewing angle dependent)
FIRE RATING	B-s1,d0 (EN 13501-1)

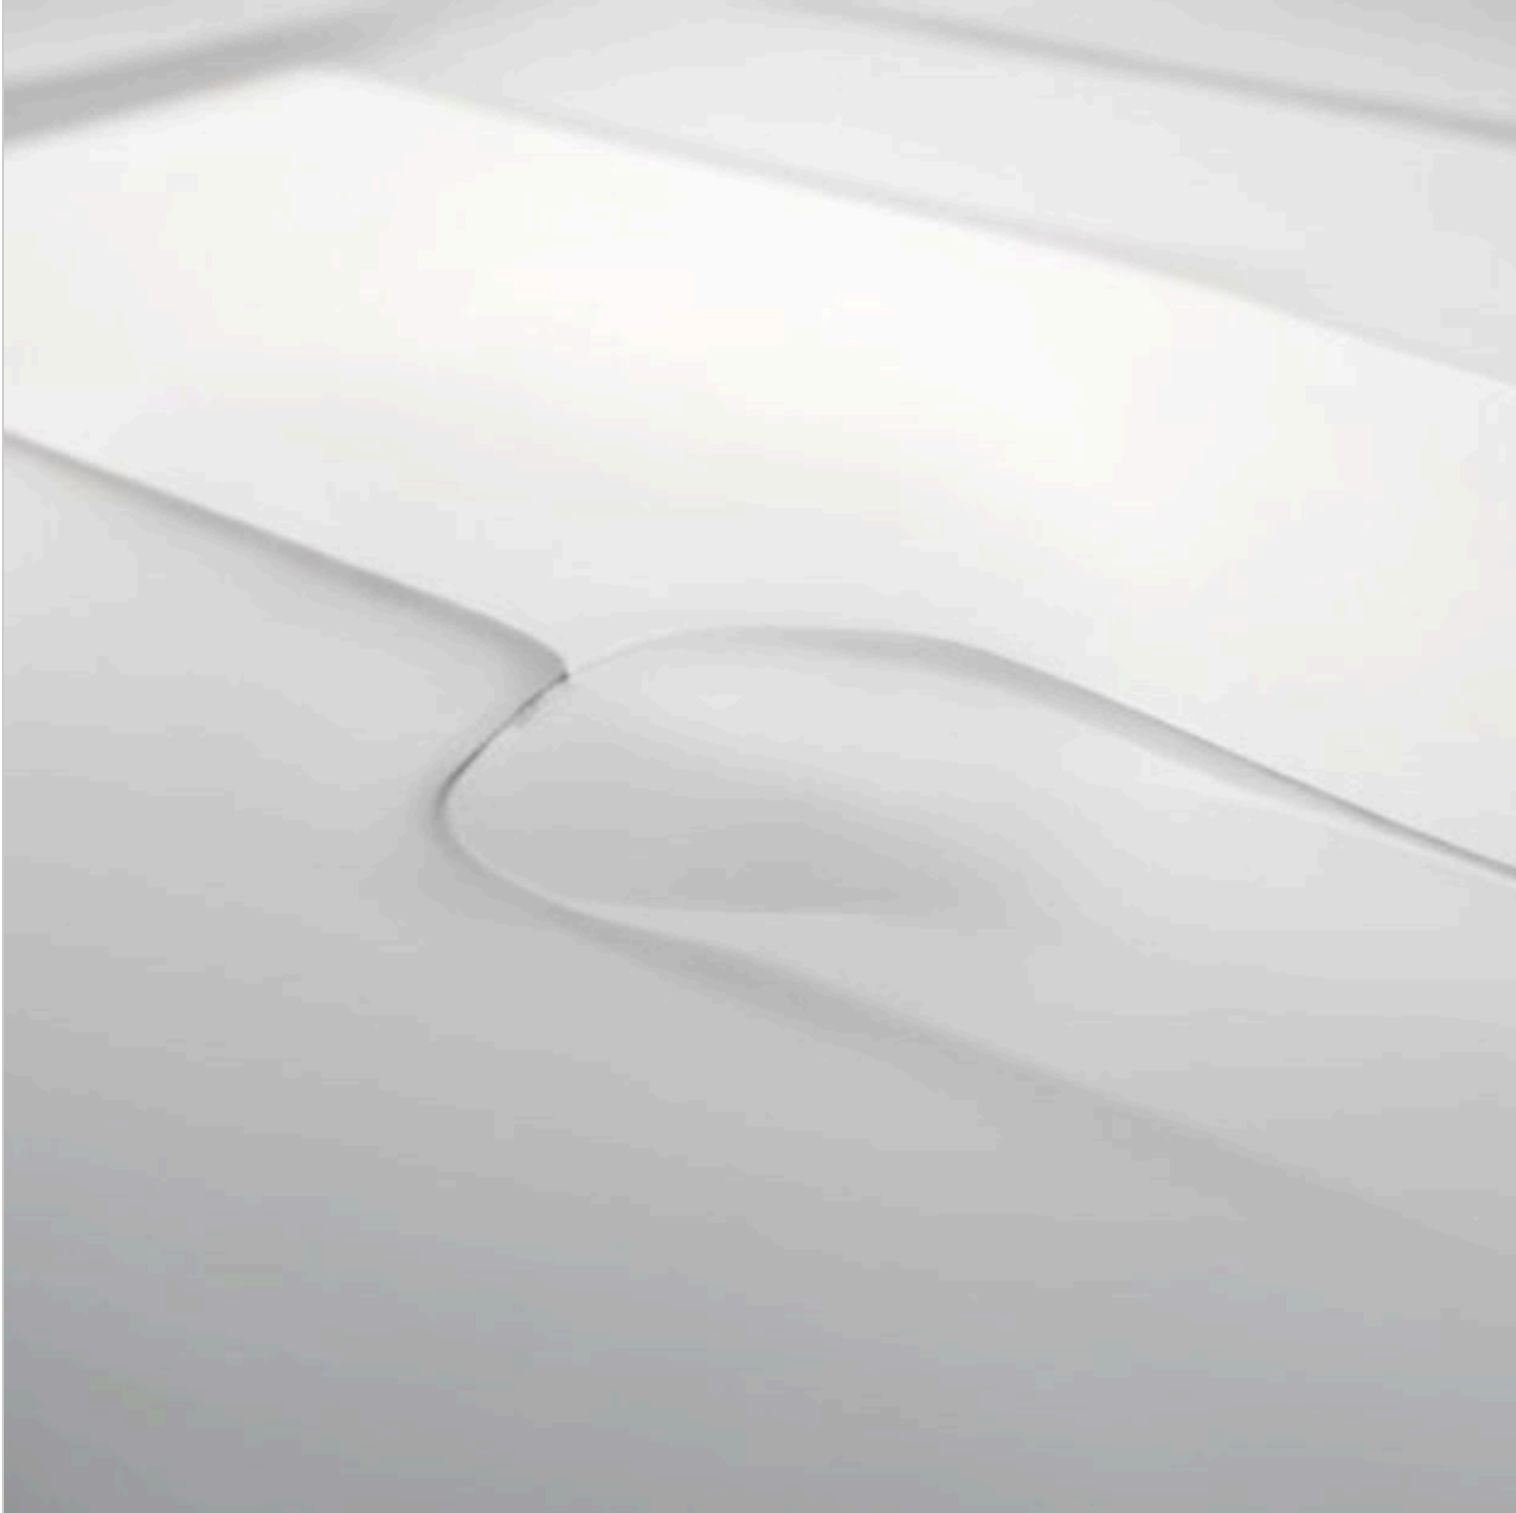

Copper Effect Aluminum Composite Panel

CMP-53

TOTAL THICKNESS	4.0 mm
SKIN ALLOY	AlMg1 (EN AW-5005), 0.5 mm
CORE MATERIAL	Polyethylene FR
FINISH / COATING	UV-digital printing, copper imitation
EFFECT	Shiny copper with patina
FIRE RATING	B-s1,d0 (EN 13501-1)



Terracotta Texture Exterior HPL Panel

HPR-48

THICKNESS	8,0 mm
COMPOSITION	Kraft cellulose + phenolic resin
SURFACE FINISH	Terracotta leather-embossed finish
DENSITY	≈ 1,380 kg/m³
WATER ABSORPTION	≤ 1,5 % (EN 438-2)
FIRE RATING	B-s2,d0 (EN 13501-1)



Thin 6mm Exterior HPL Panel

HPR-49


THICKNESS	6.0 mm
COMPOSITION	Kraft pulp + melamine resin
SURFACE FINISH	HPL Compact Uni, gray RAL 7035
DENSITY	≈ 1.380 kg/m³
APPLICATION	Unloaded vertical planes
FIRE RATING	B-s2,d0 (EN 13501-1)



Matte Black Exterior HPL Panel

HPR-50


THICKNESS	10.0 mm
COMPOSITION	Kraft pulp + phenolic resin
SURFACE FINISH	Black matte compact, RAL 9005
DENSITY	≈ 1.380 kg/m³
GLOSS LEVEL (60°)	≤ 5 GU (deep Matte)
FIRE RATING	B-s2,d0 (EN 13501-1)

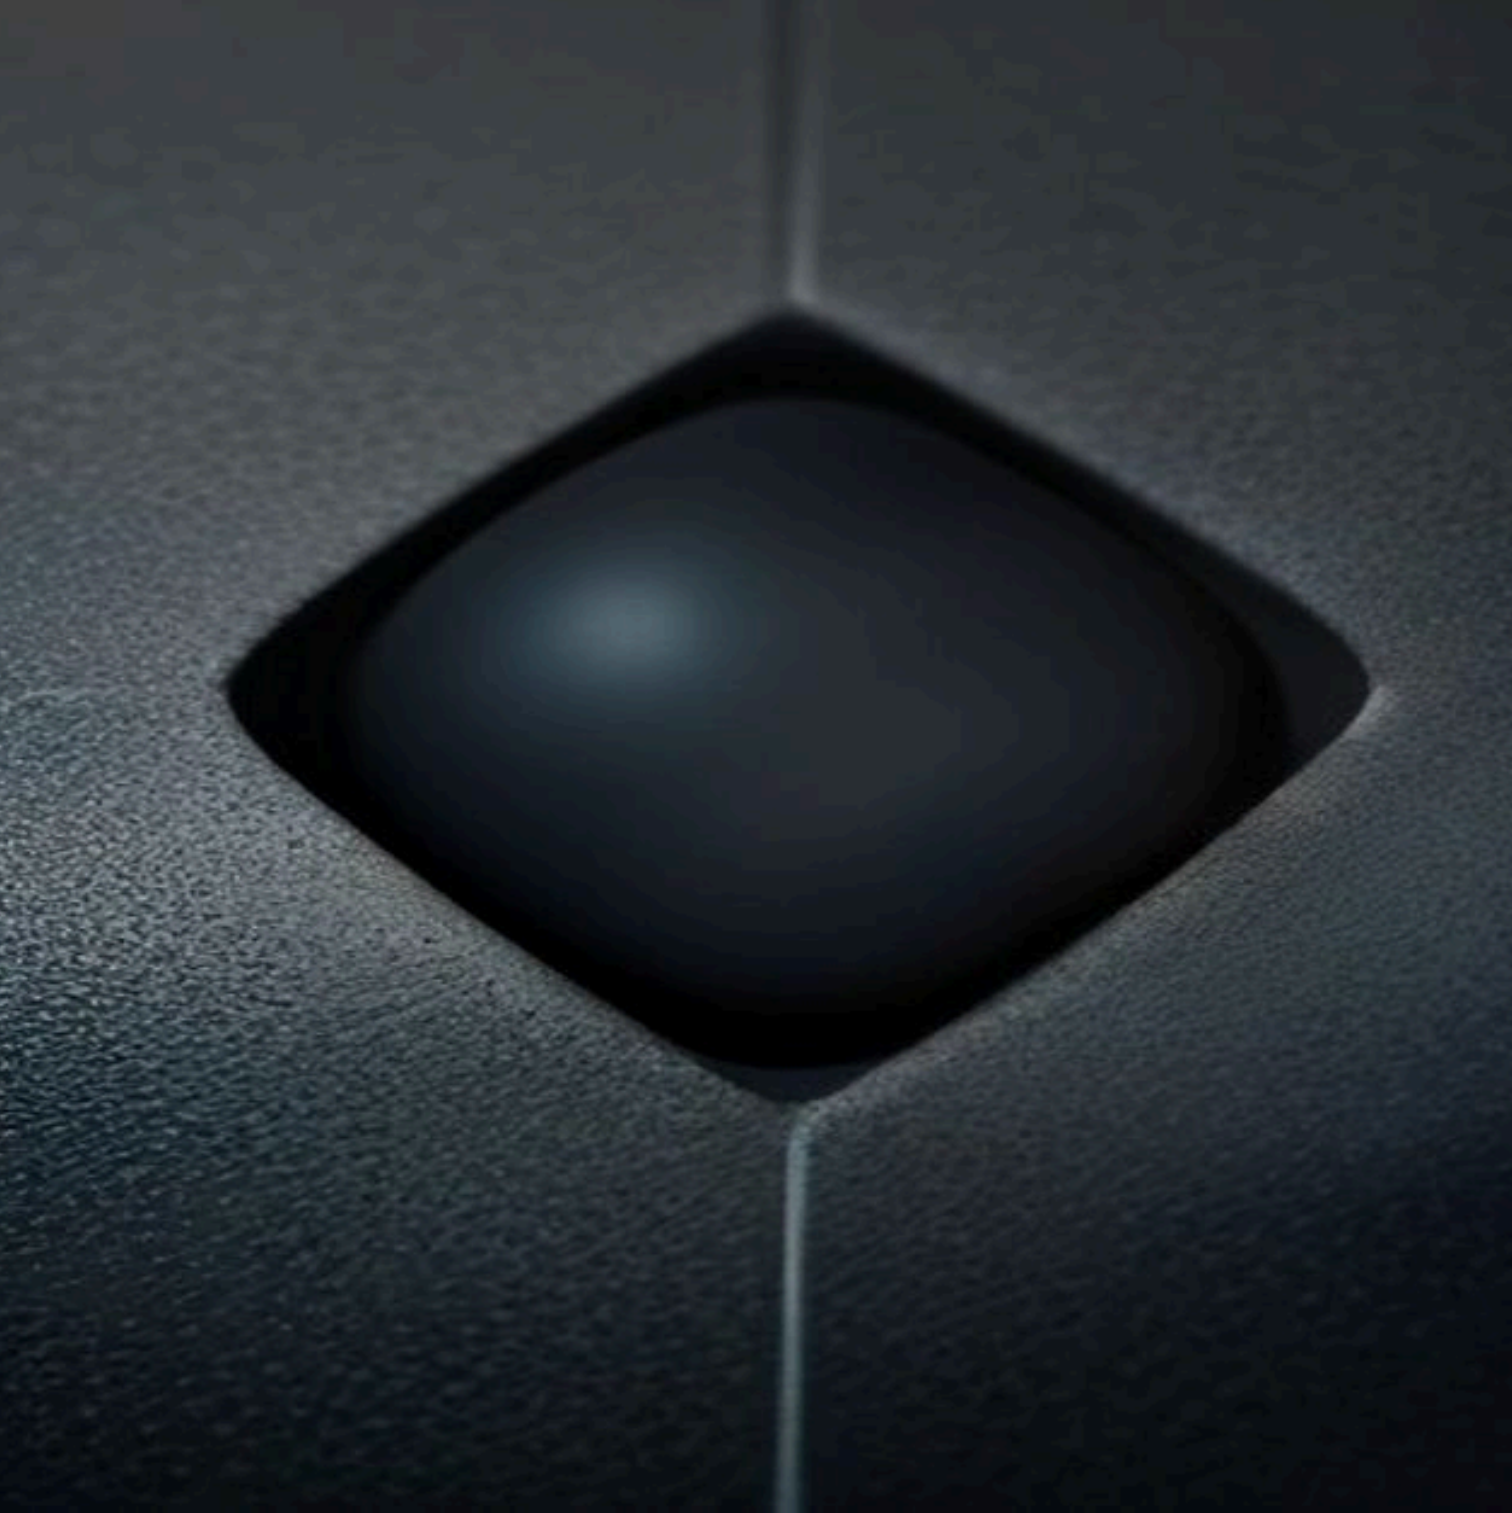

Antibacterial Surface HPL Panel

HPR-51

THICKNESS	8.0 mm
COMPOSITION	Kraft pulp + melamine resin + Ag ⁺
SURFACE FINISH	White matte, silver ions Ag ⁺
ANTIBACTERIAL PROPERTIES	≥ 99.9% suppression (ISO 22196)
APPLICATION	Medical facilities, food industry
FIRE RATING	B-s2,d0 (EN 13501-1)

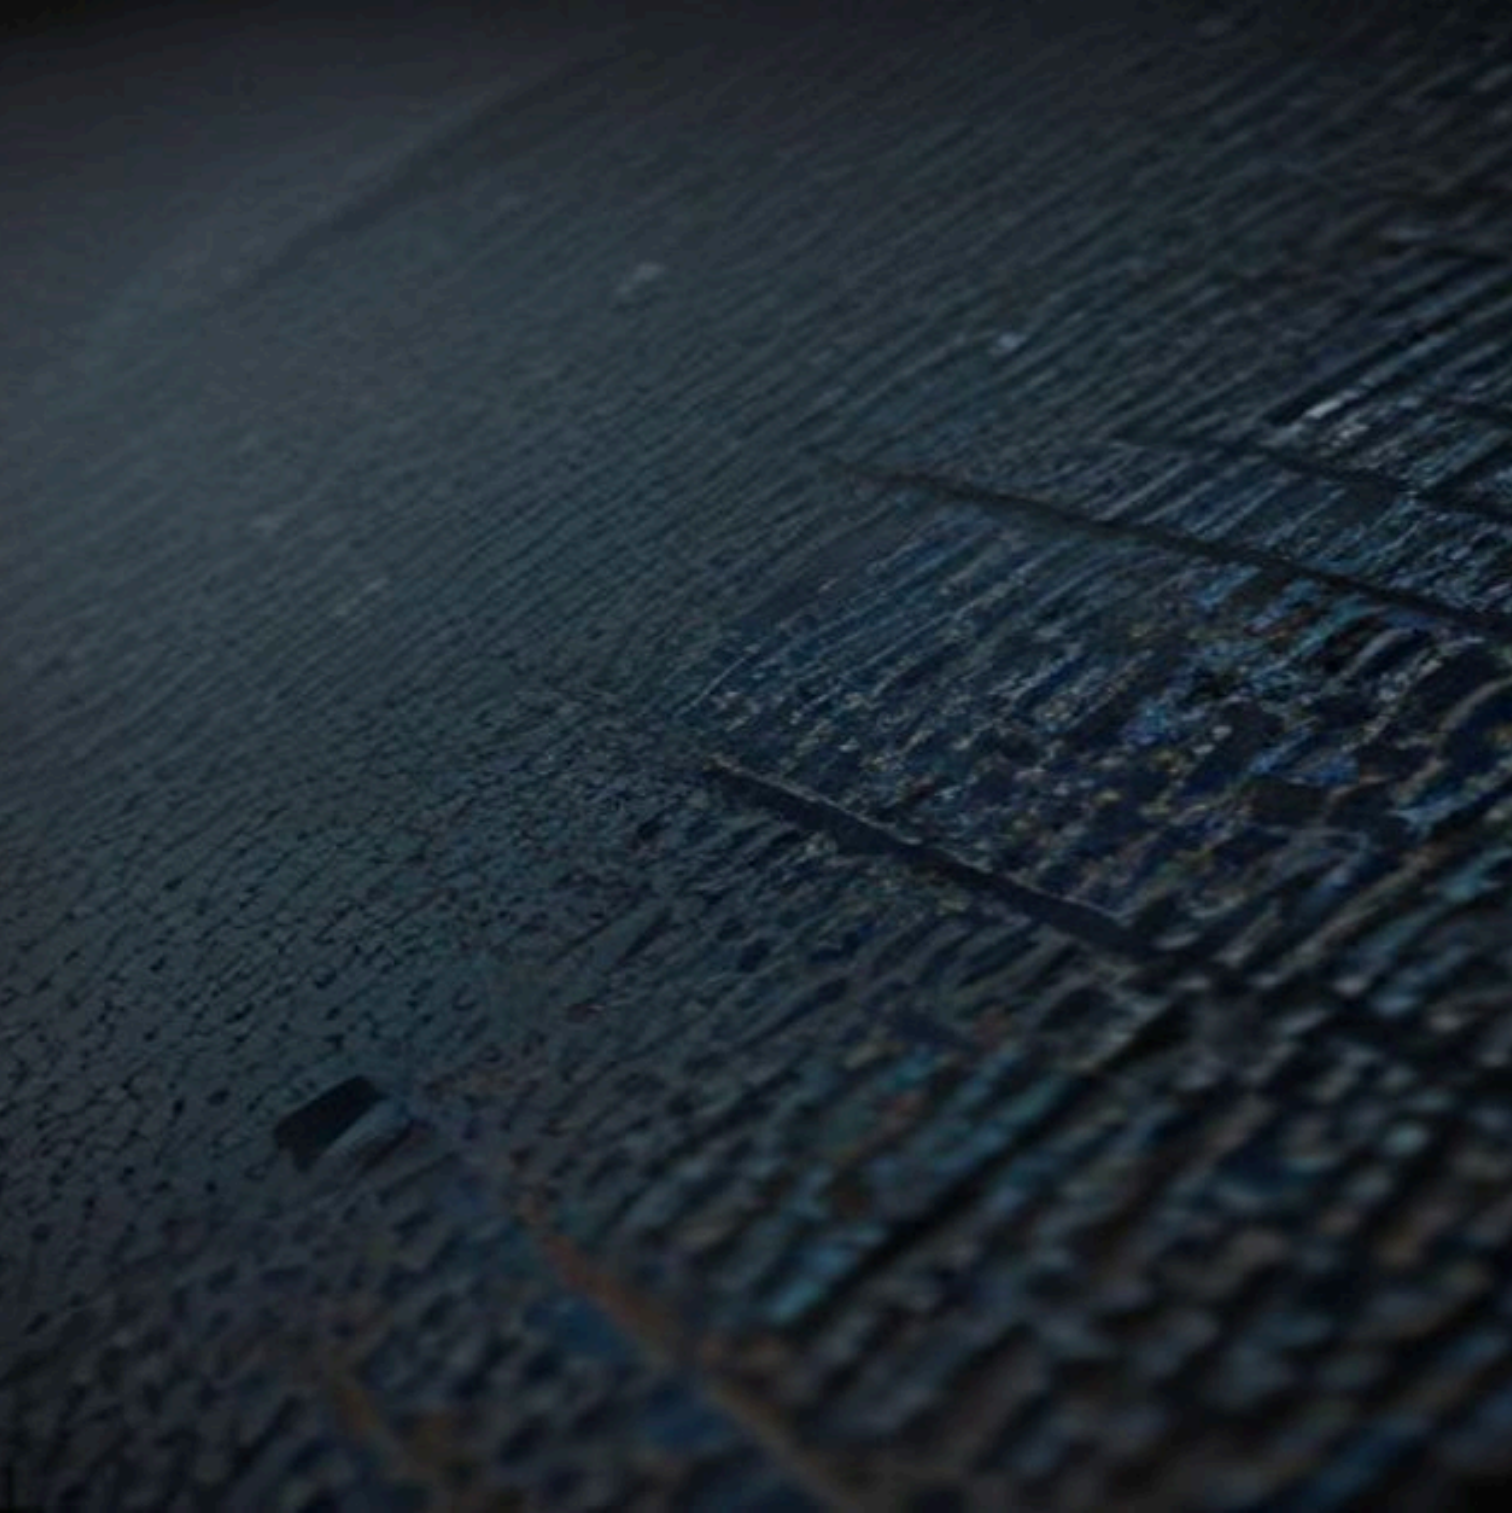

B1 Fire-Retardant HPL Panel

HPR-52

THICKNESS	12.0 mm
COMPOSITION	Kraft pulp + phenolic resin (FR)
SURFACE FINISH	Gray RAL 7040, matte compact
DENSITY	≈ 1.380 kg/m³
FIRE HAZARD CLASS	KM1 (DIN 30244), B1 (DIN 4102)
FIRE RATING	B-s1,d0 (EN 13501-1)



Structural T-Section Aluminum Rail Profile

MAT-45

MATERIAL	Aluminum EN AW-6063 T6
CROSS-SECTION	T 60 × 40 × 3.0 mm
STANDARD LENGTH	6 000 mm
YIELD STRENGTH	≥ 195 MPa (EN 755-2)
FINISH / COATING	Anodizing 15 µm (silver)
COMPATIBILITY	Sections 01–06 of all materials



Structural L-Section Aluminum Rail Profile

MAT-46


MATERIAL	Aluminum EN AW-6063 T6
CROSS-SECTION	L 60 × 40 × 3.0 mm
STANDARD LENGTH	6 000 mm
YIELD STRENGTH	≥ 195 MPa (EN 755-2)
FINISH / COATING	Anodizing 15 µm (natural)
APPLICATION	Corner transitions and opening frames



Galvanized Steel T-Profile Bearing Rail

MAT-47


MATERIAL	S350GD+Z275 (GOST ISO EN 10346)
CROSS-SECTION	T 80 × 50 × 2.5 mm
STANDARD LENGTH	6 000 mm
YIELD STRENGTH	≥ 350 MPa
PROTECTION	Hot-dip galvanizing Z275 (275 g/m²)
APPLICATION	Main bearing subsystem

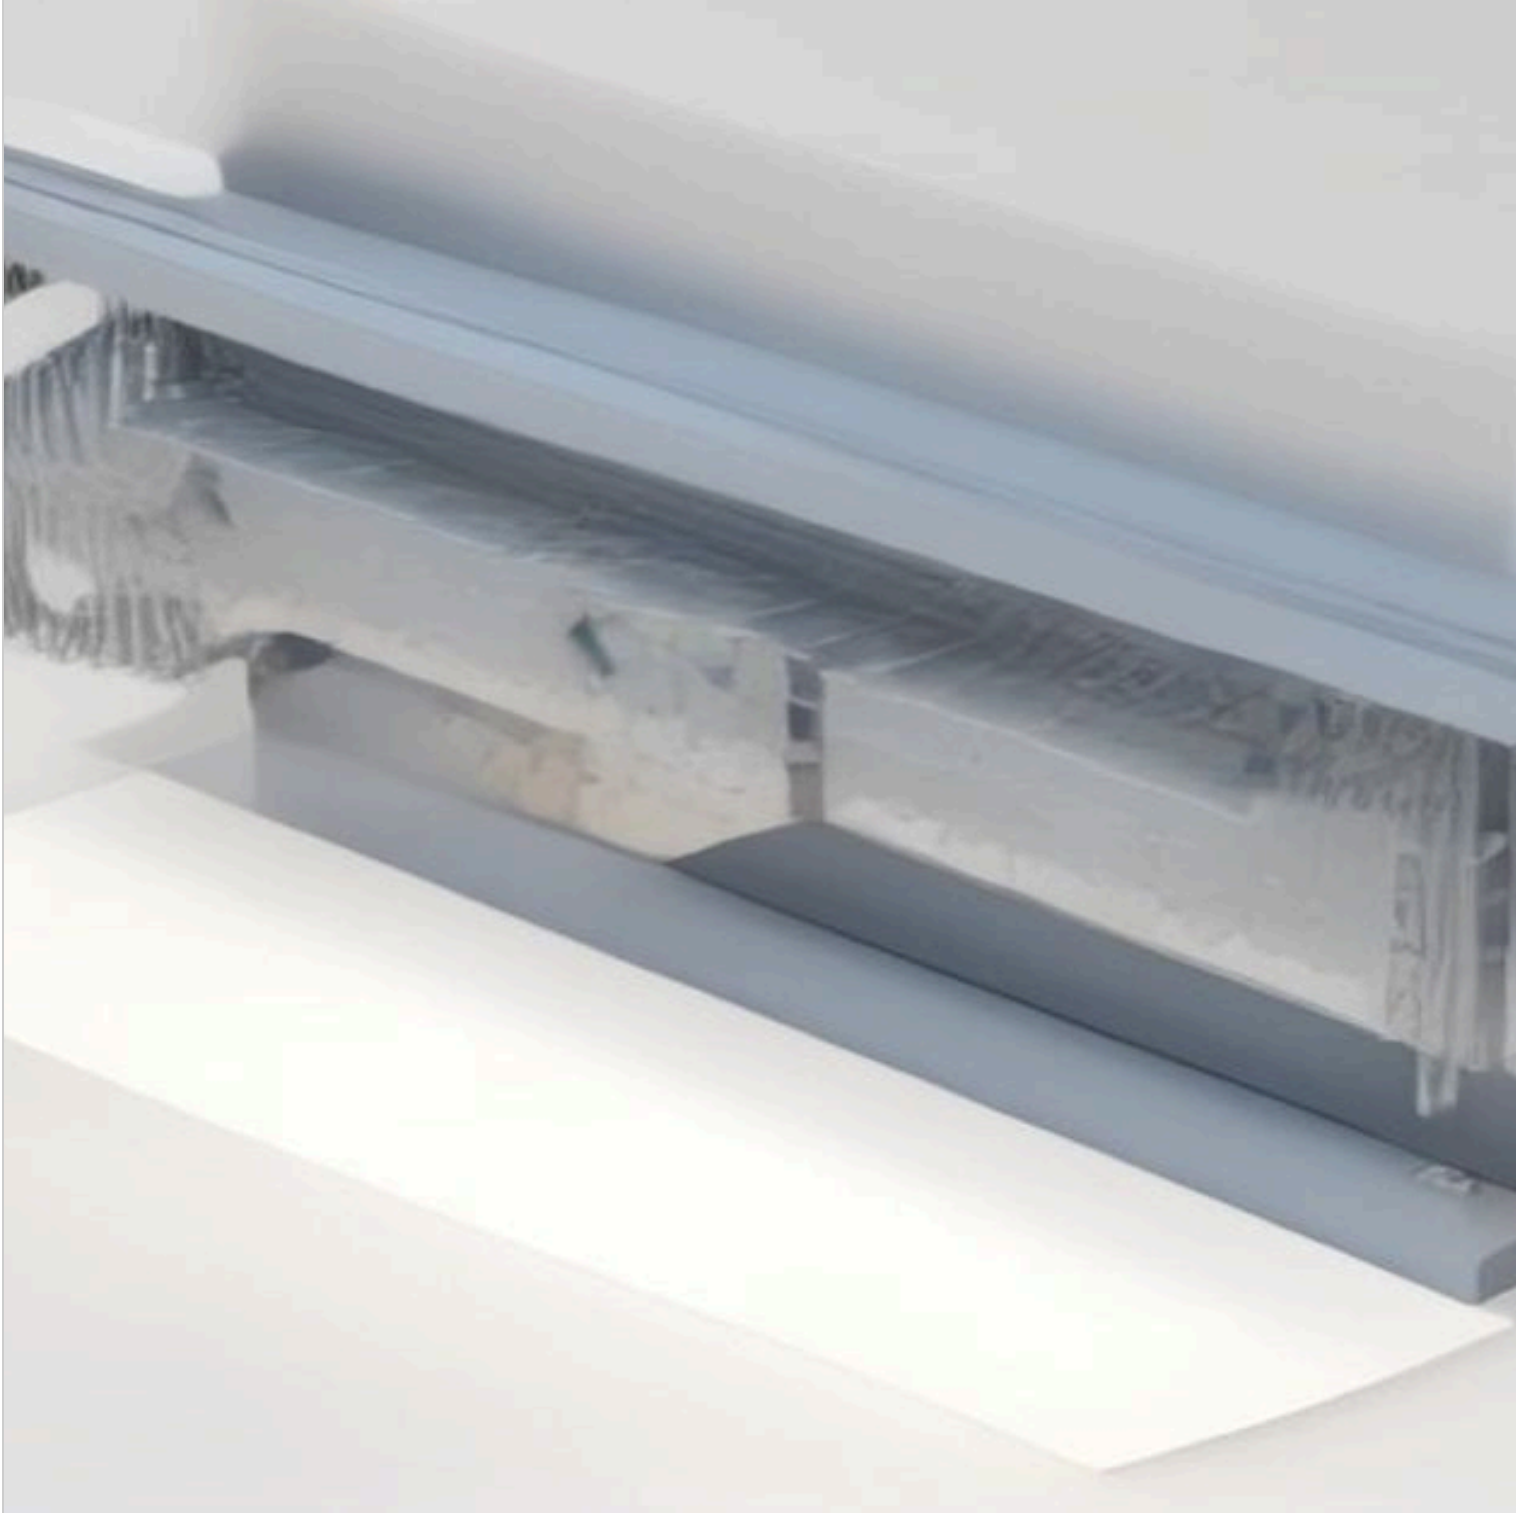

Adjustable Aluminum Subframe Wall Bracket

MAT-48


MATERIAL	Aluminum EN AW-6061 T6
ADJUSTMENT RANGE	±40 mm (30–70 mm from wall)
MAX LOAD	3.0 kN (per bracket)
THERMAL BREAK	Built-in thermal break insert
FINISH / COATING	Anodizing 20 µm
COMPLIANCE	EN 1090-1:2009+A1:2011

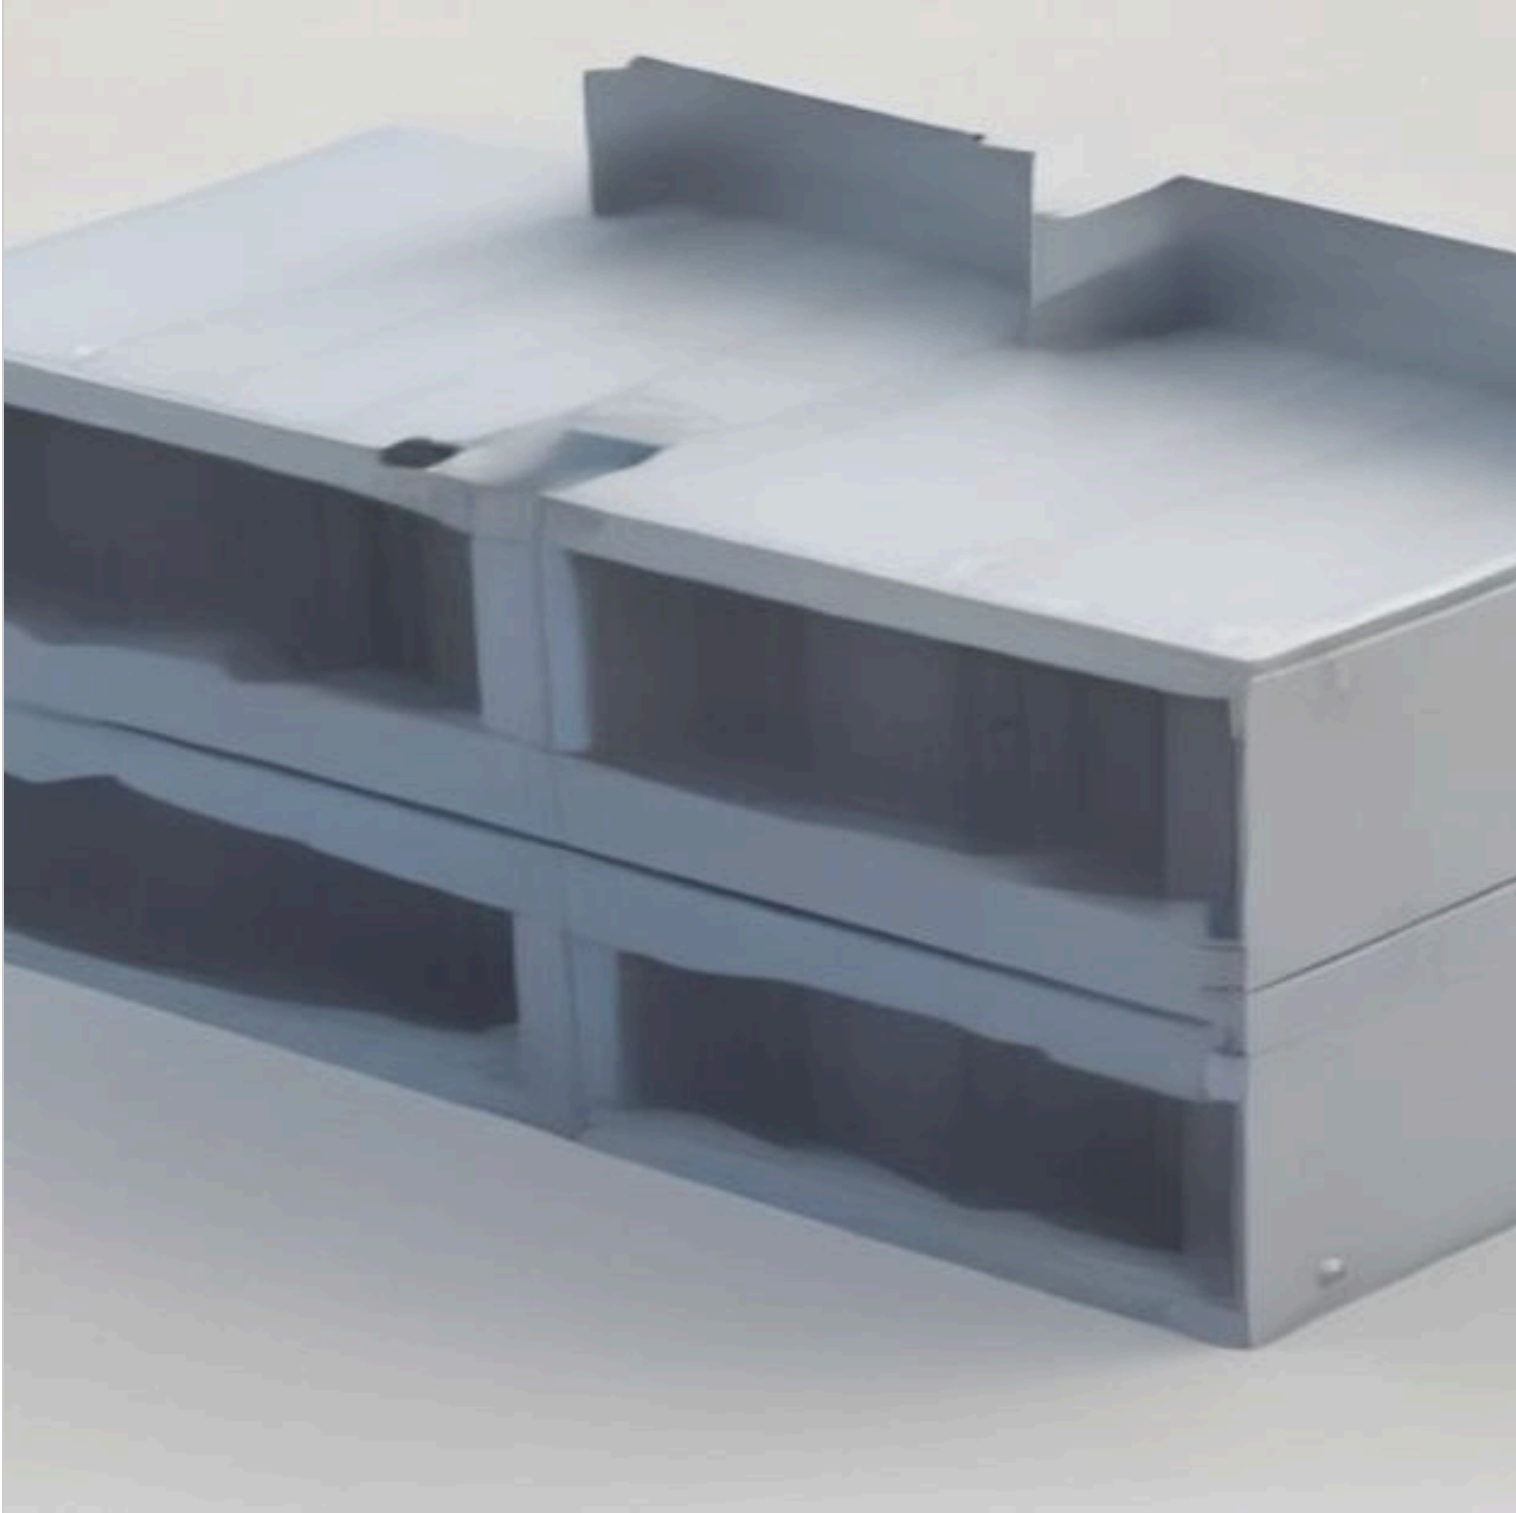

Reinforced Wall Bracket, 150mm Reach

MAT-49


MATERIAL	S355J2 Galvanized steel Z275
WALL STANDOFF	150 mm (fixed)
MAX LOAD	5.0 kN (per bracket)
THERMAL BREAK	EPDM Thermal Break Gasket
FASTENING BOLT	M10 × 60 A4 (included)
COMPLIANCE	EN 1090-1:2009+A1:2011

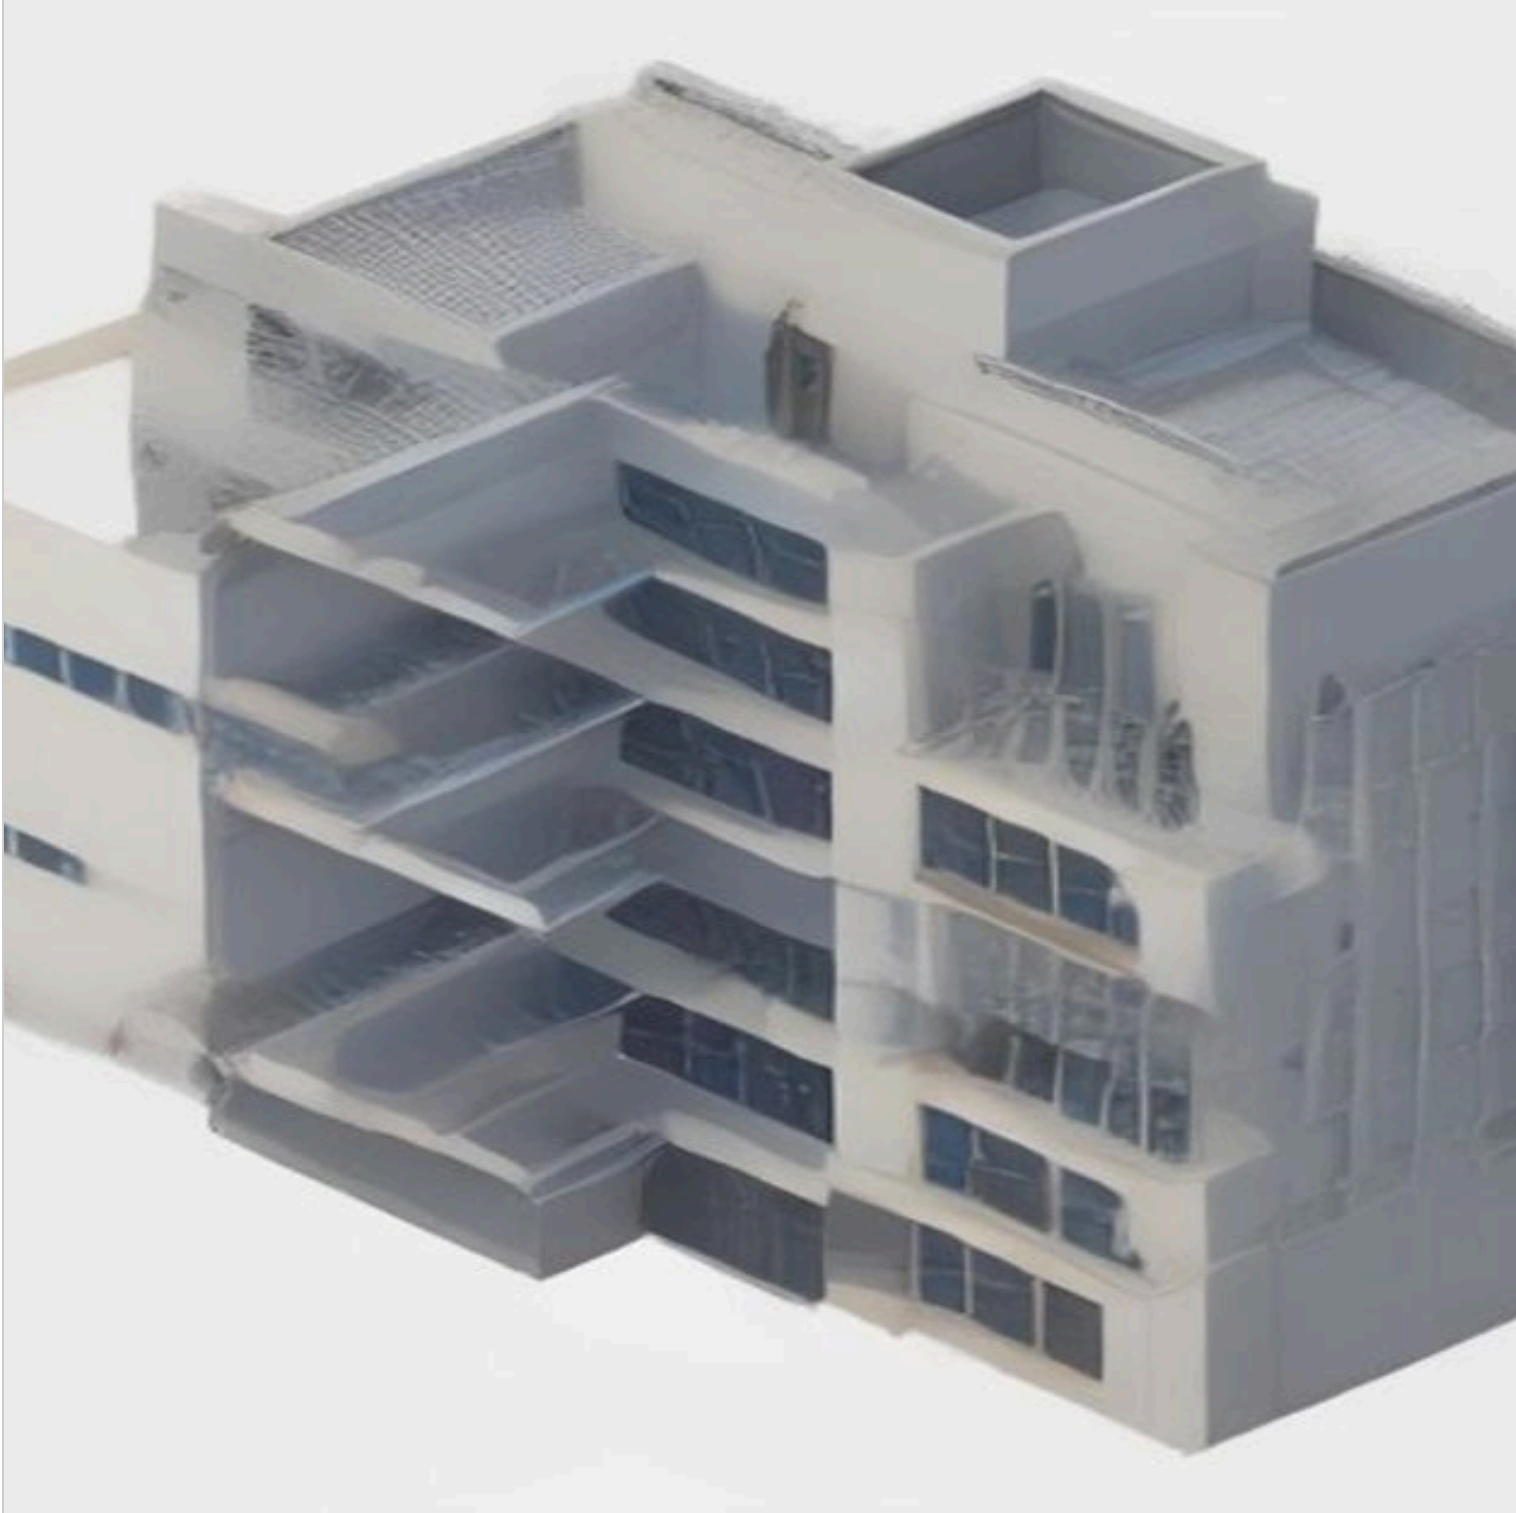

Corner Joint Subframe Bracket

MAT-50


MATERIAL	Aluminum EN AW-6061 T6
GEOMETRY	90° / 135° (swivel)
MAX LOAD	2.5 kN (per corner)
THERMAL BREAK	Paronite gasket 3.0 mm
FINISH / COATING	Anodizing silver 20 µm
APPLICATION	Corner nodes of facade systems

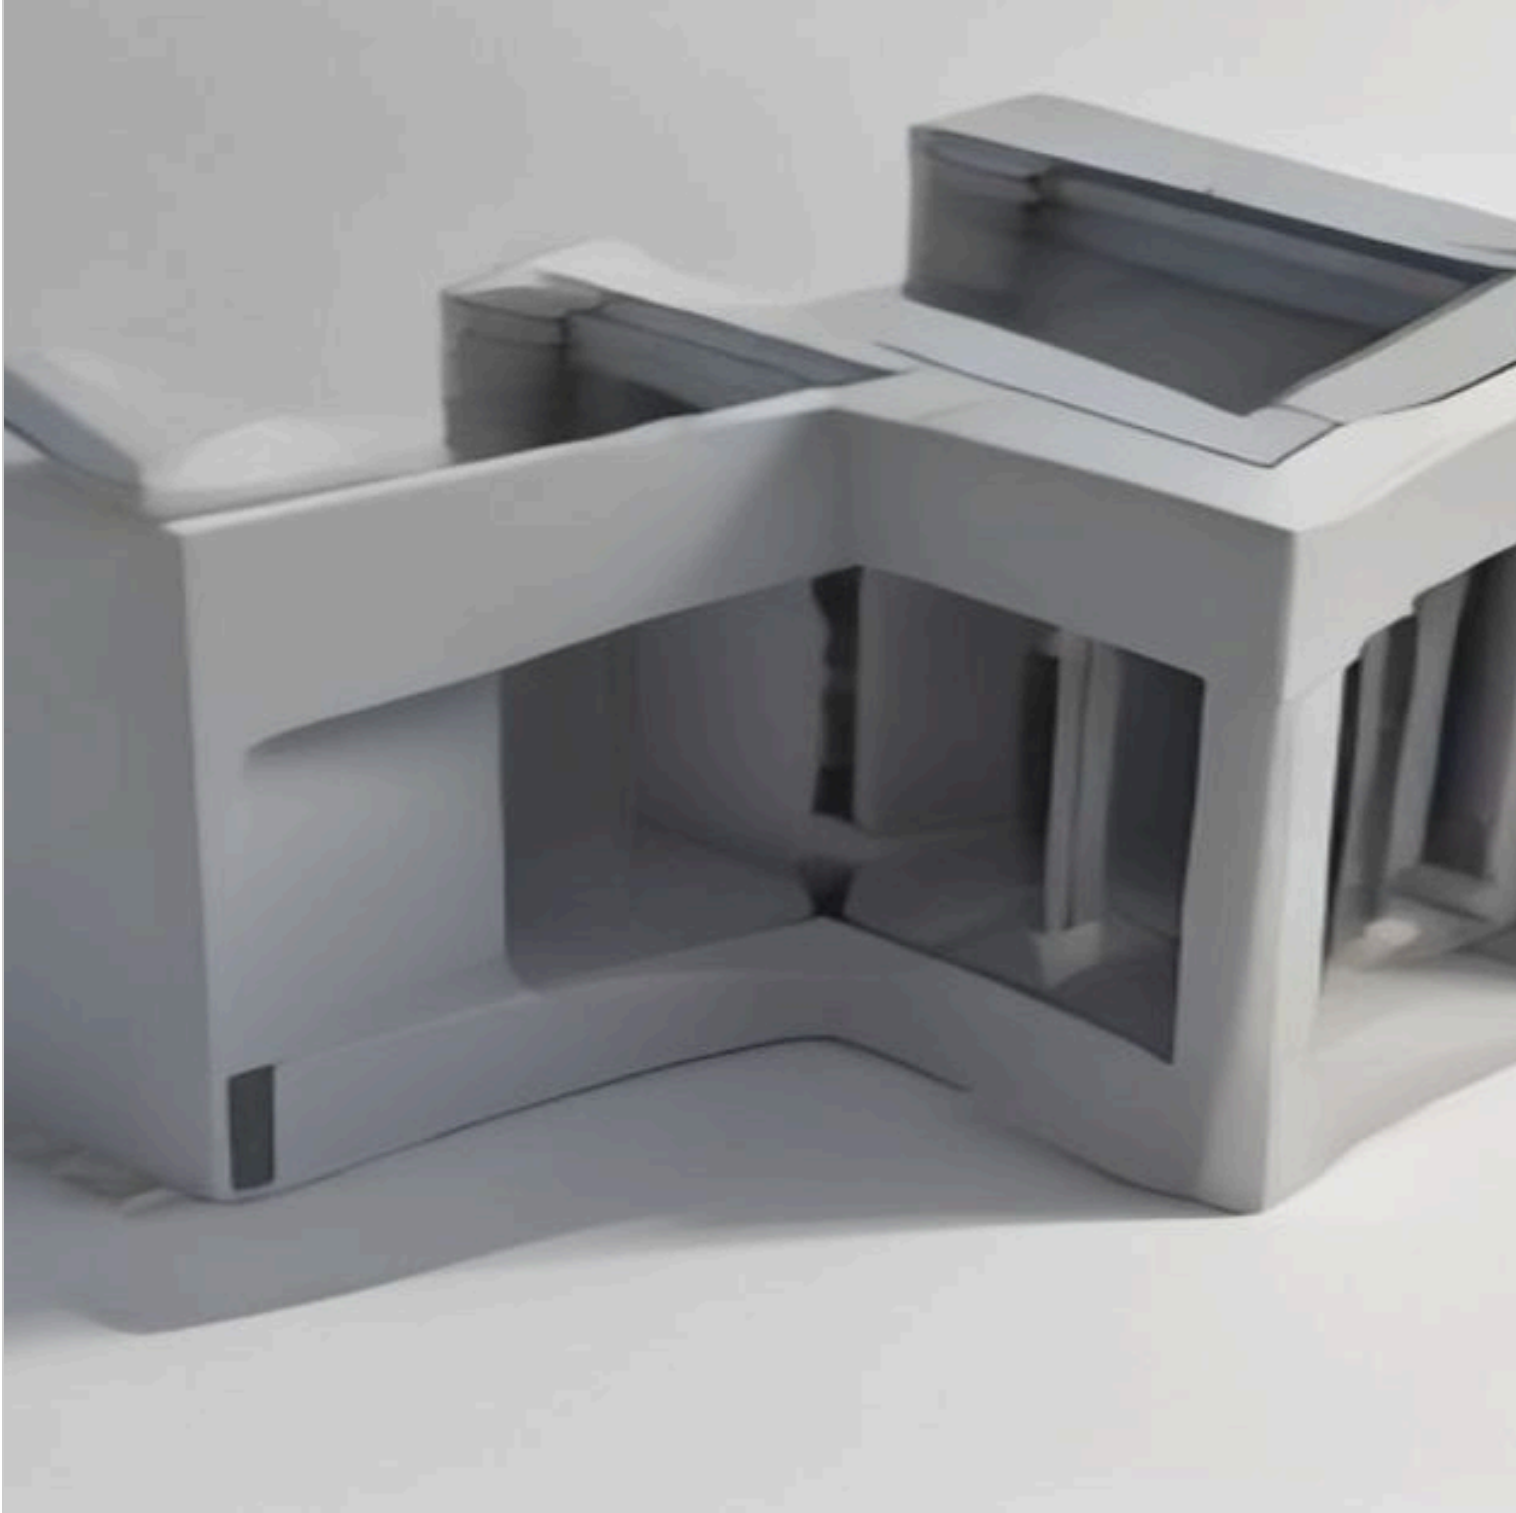

Paronite Thermal Break Facade Gasket

MAT-51


MATERIAL	Paronite PON (GOST 481)
THICKNESS	3.0 mm
SIZE	60 × 60 mm (under bracket)
TEMPERATURE RANGE	−50 °C ... +300 °C
THERMAL CONDUCTIVITY λ	≤ 0.23 W/(m·K)
APPLICATION	Breaking thermal bridges in nodes

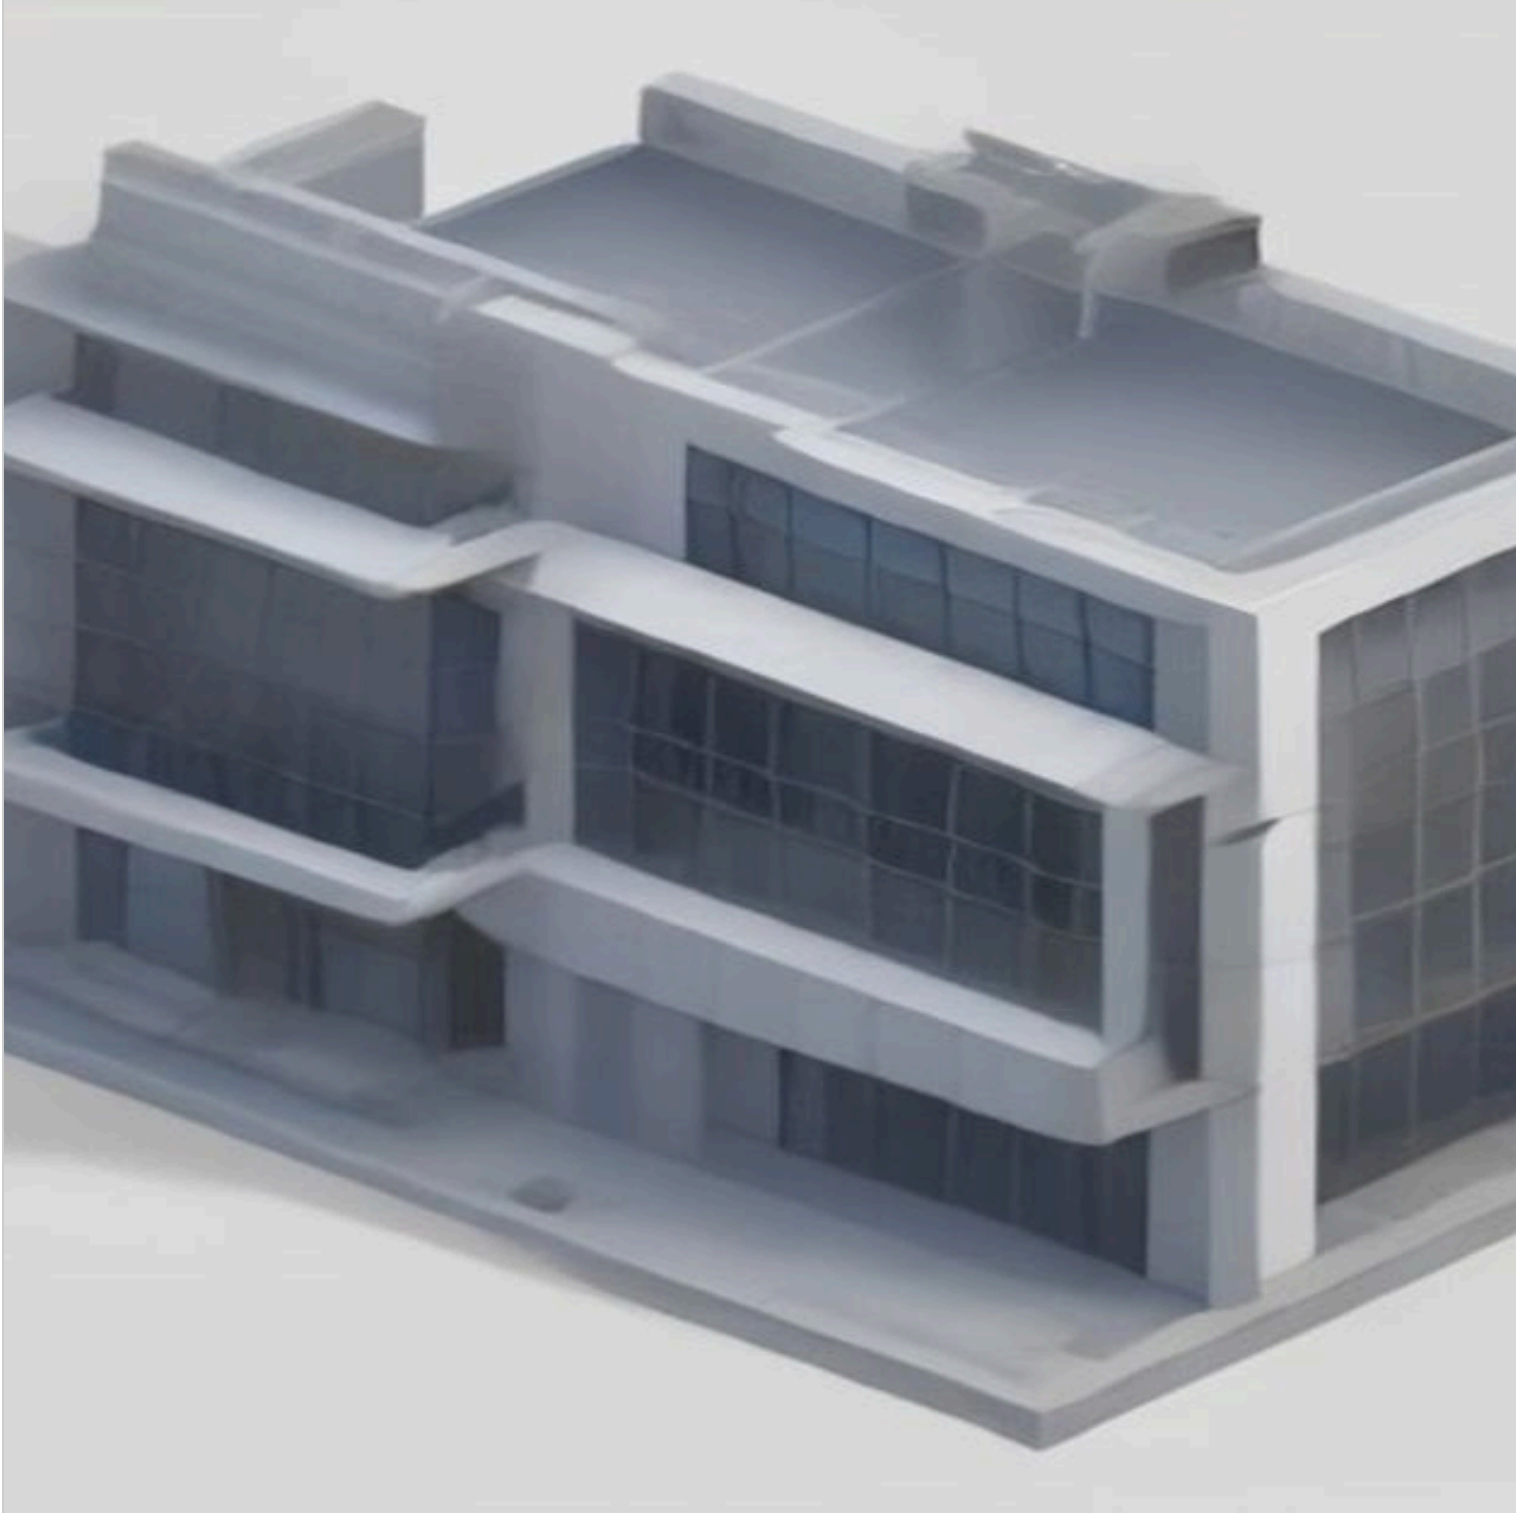

EPDM Thermal Break Gasket

MAT-52


MATERIAL	EPDM (Ethylene Propylene Diene Monomer rubber)
THICKNESS	4.0 mm
DENSITY	1.40 g/cm ³
TEMPERATURE RANGE	−50 °C ... +120 °C
THERMAL CONDUCTIVITY λ	≤ 0.25 W/(m·K)
STANDARD	ASTM D573, EPDM 60 Shore A

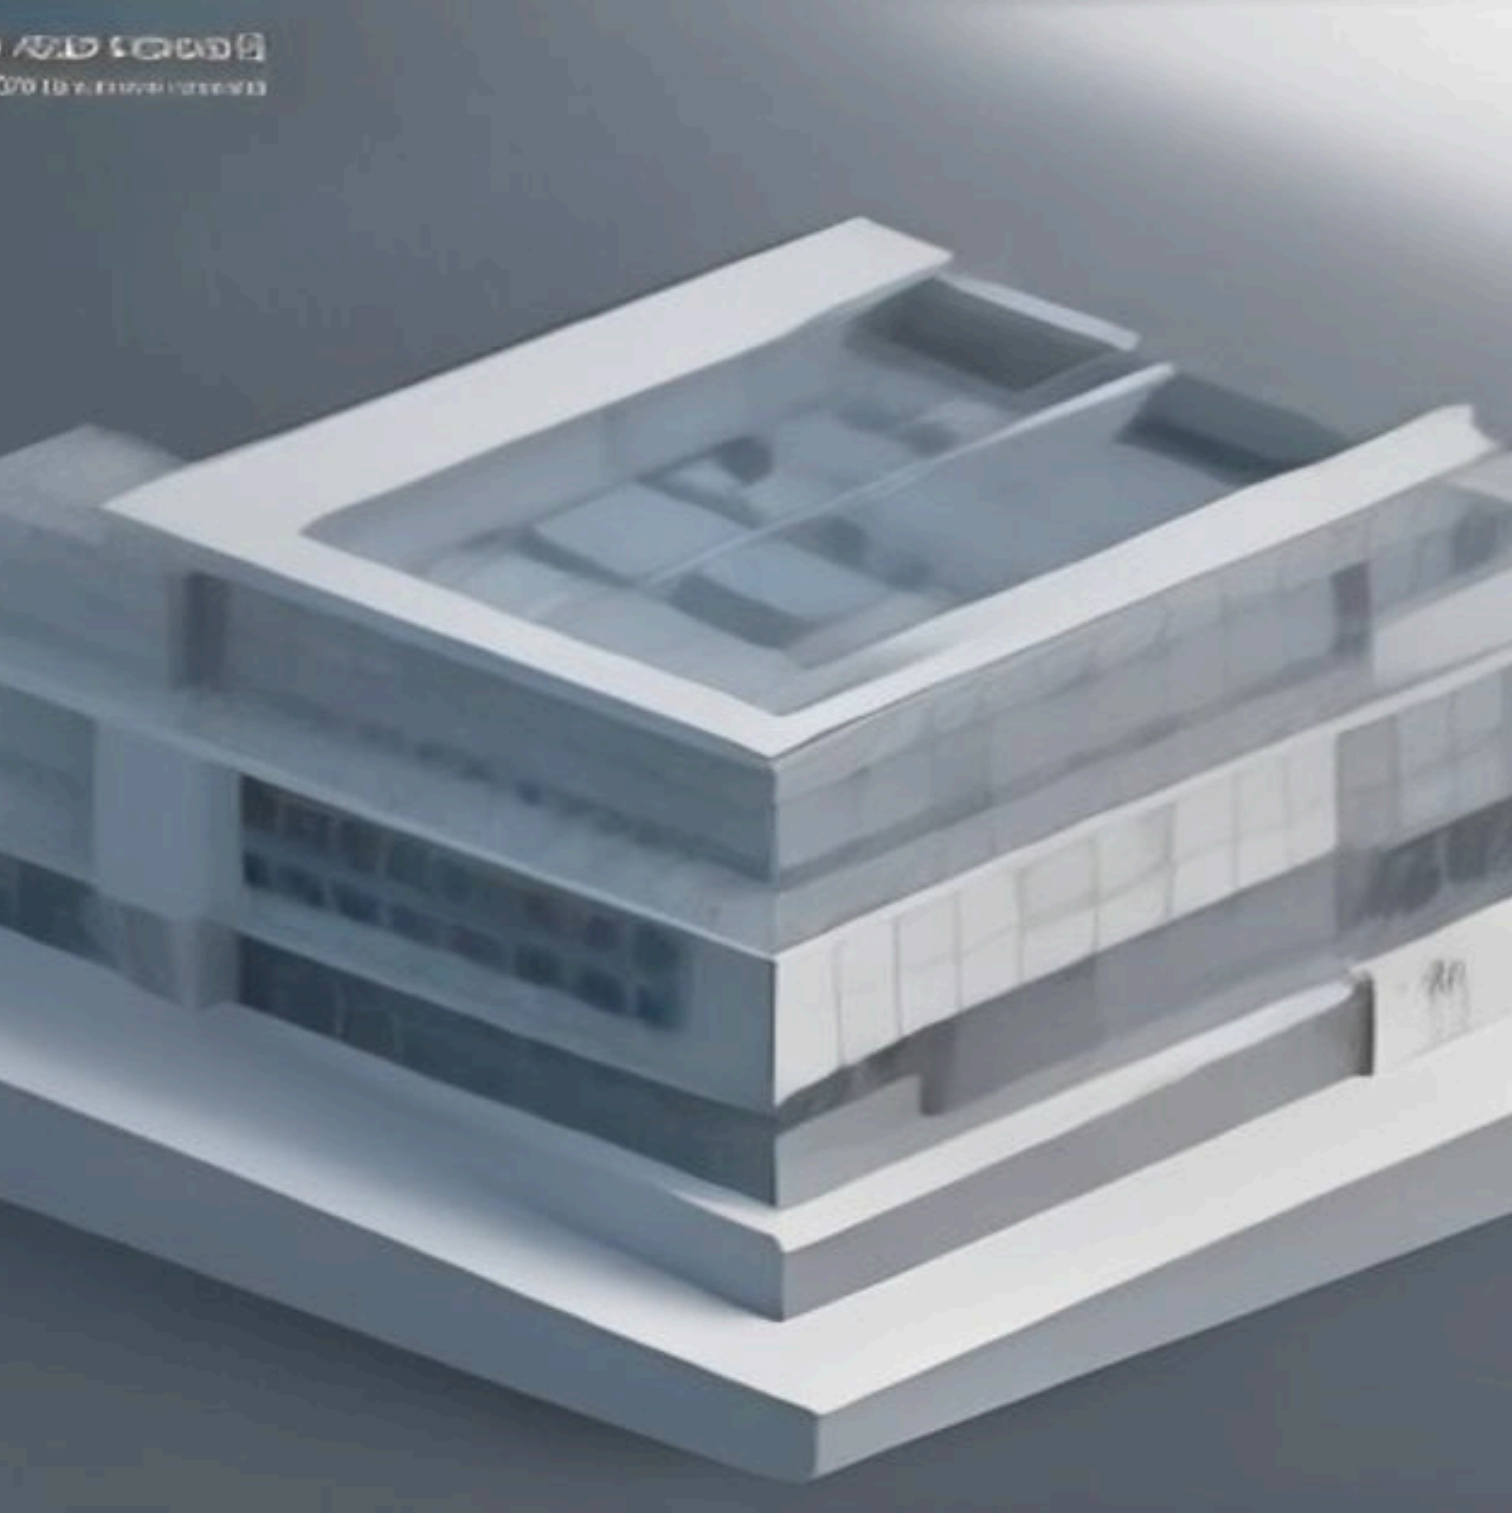

Compressible Sealing Tape

MAT-53

MATERIAL	PE-foam with acrylic adhesive
SIZE	20 × 6 mm (roll 5 000 mm)
COMPRESSION RATIO	30–85 % (adjustable gap)
TEMPERATURE RANGE	–30 °C ... +80 °C
WATER RESISTANCE	IP 65 (DIN EN 60529)
APPLICATION	Joints and gaps in facade panels

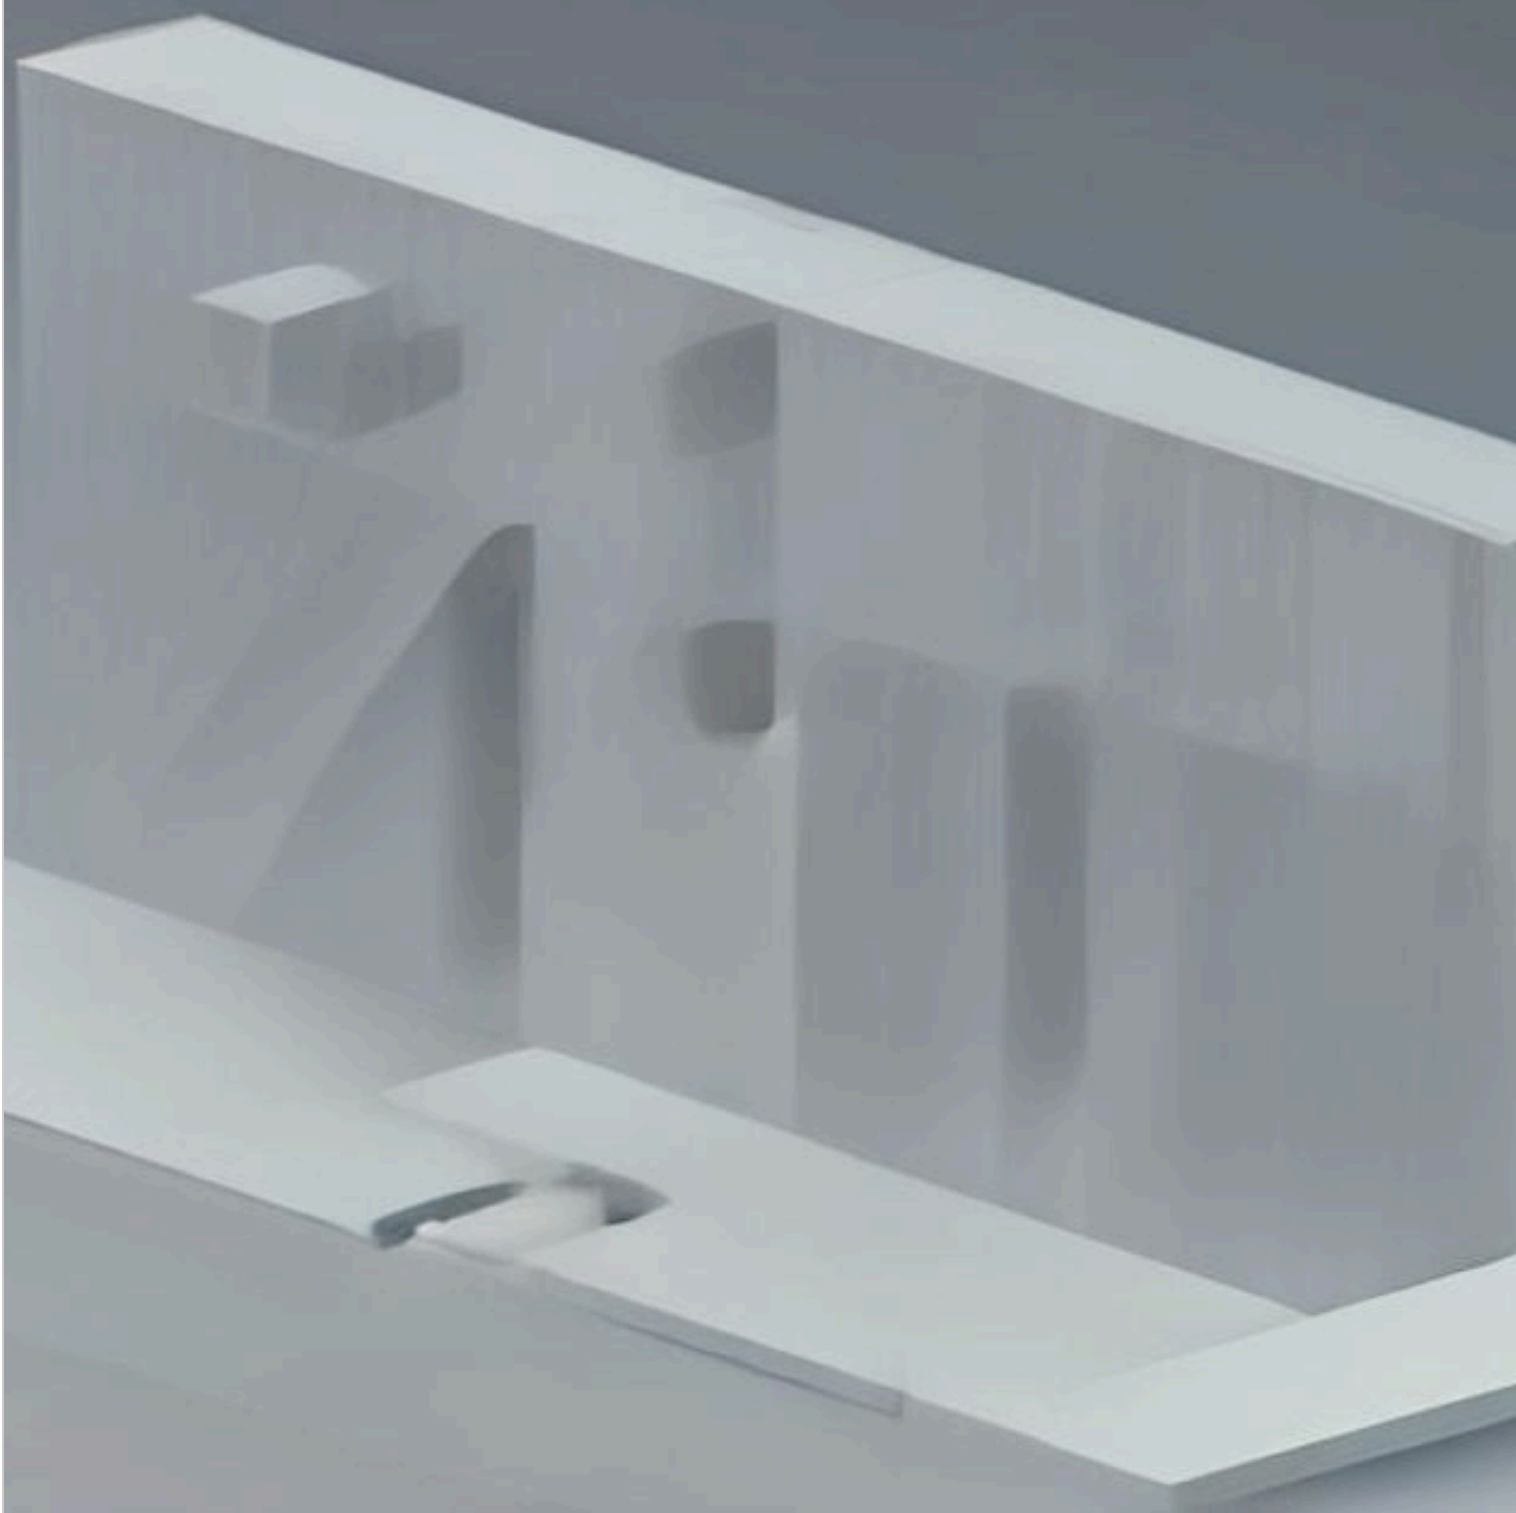

Concealed Fastening Bracket Clamp

MAT-54


MATERIAL	AISI 304 Stainless steel
TYPE	Concealed (invisible from outside)
PANEL WIDTH	from 200 to 600 mm
MAX LOAD	1.2 kN/clamp
THICKNESS	1.5 mm (stamped)
STANDARD	EN 1090-2:2018



Visible Fastening Bracket Clamp

MAT-55


MATERIAL	AISI 304 Stainless steel
TYPE	Visible (with decorative head)
PANEL WIDTH	from 150 to 800 mm
MAX LOAD	1.5 kN/clamp
THICKNESS	2.0 mm (stamped)
STANDARD	EN 1090-2:2018

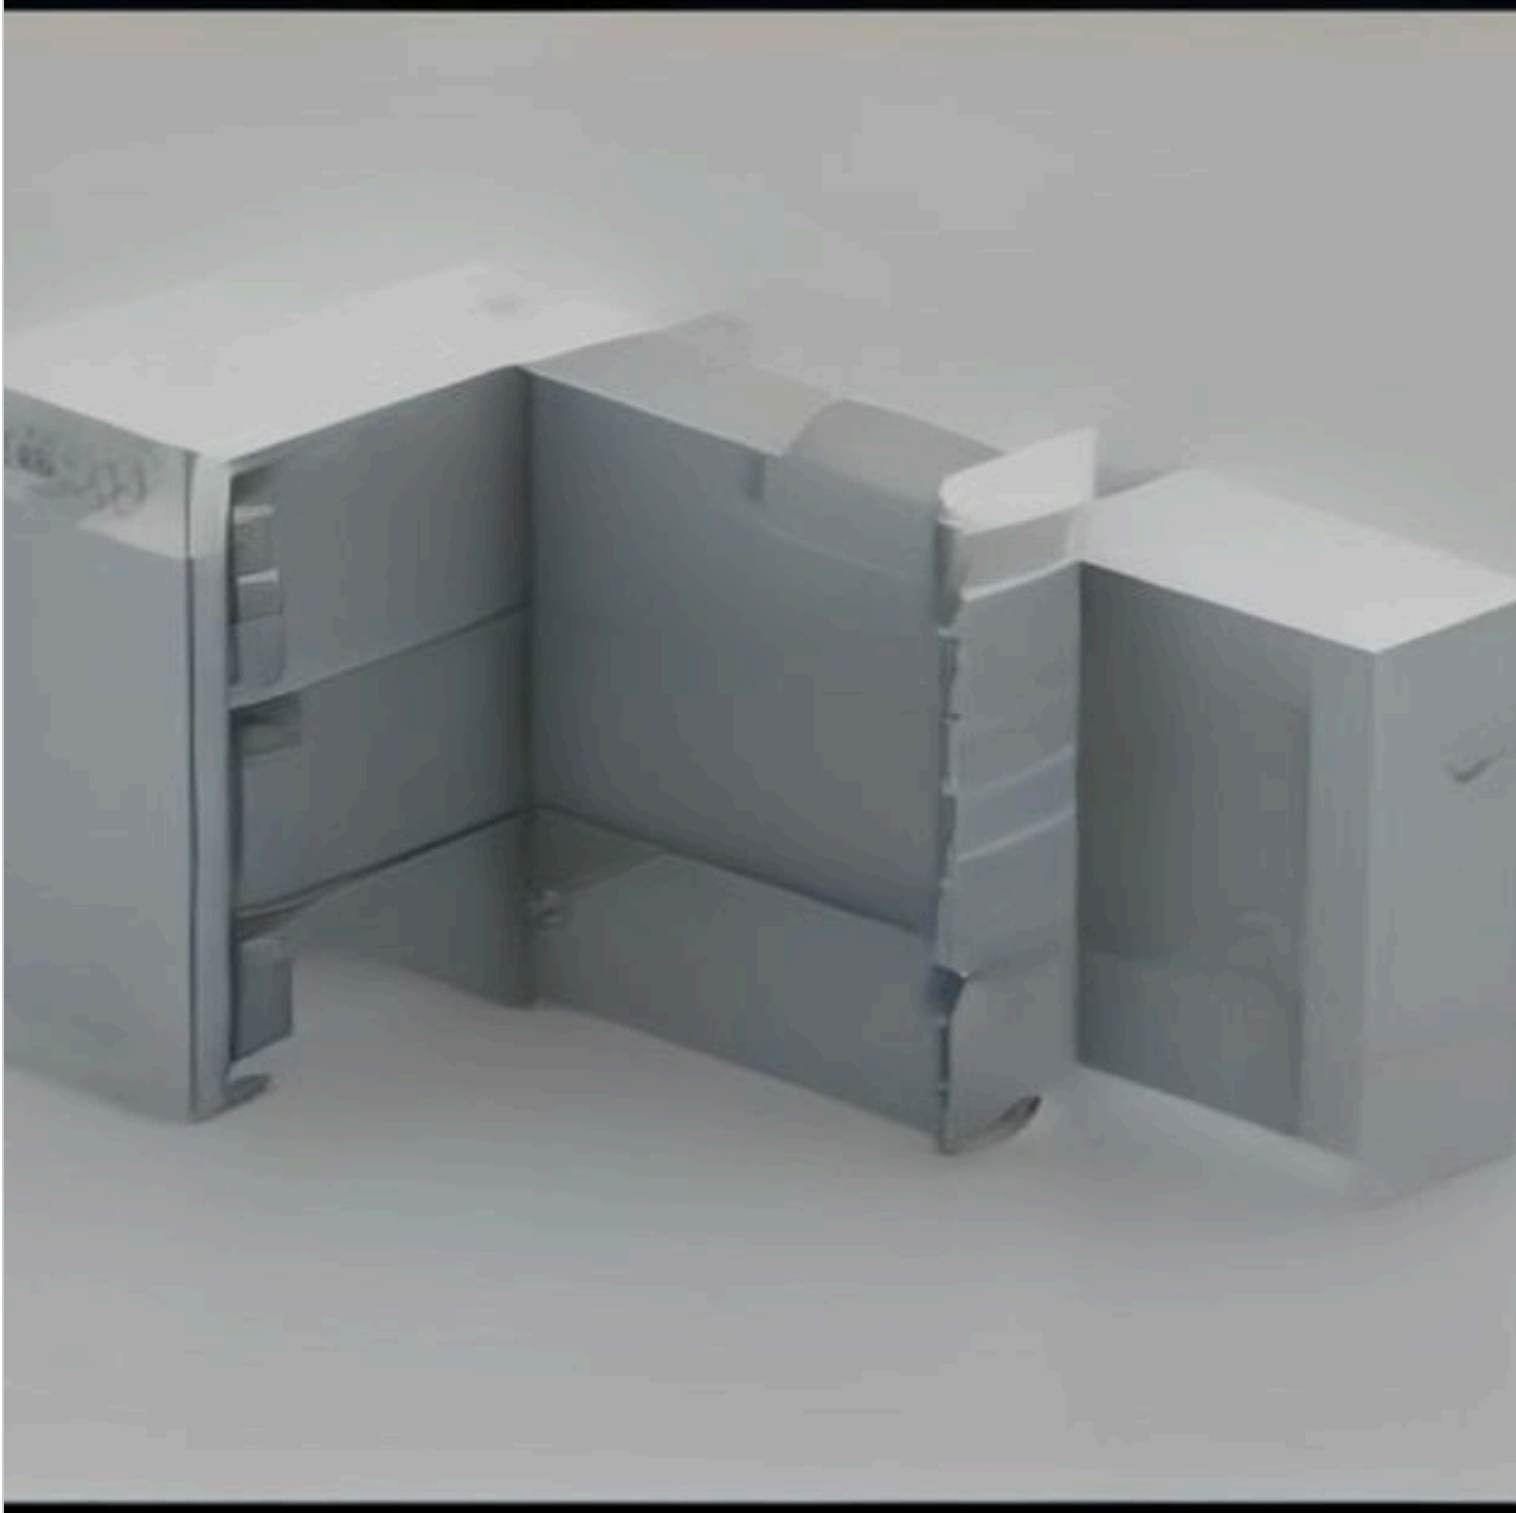

Starter Edge Fastening Clamp

MAT-56

MATERIAL	AISI 304 Stainless steel
TYPE	Edge / starter (one-sided retention)
PANEL WIDTH	from 150 to 600 mm
MAX LOAD	1.0 kN/clamp
THICKNESS	1.5 mm (stamped)
APPLICATION	Bottom and top cladding rows

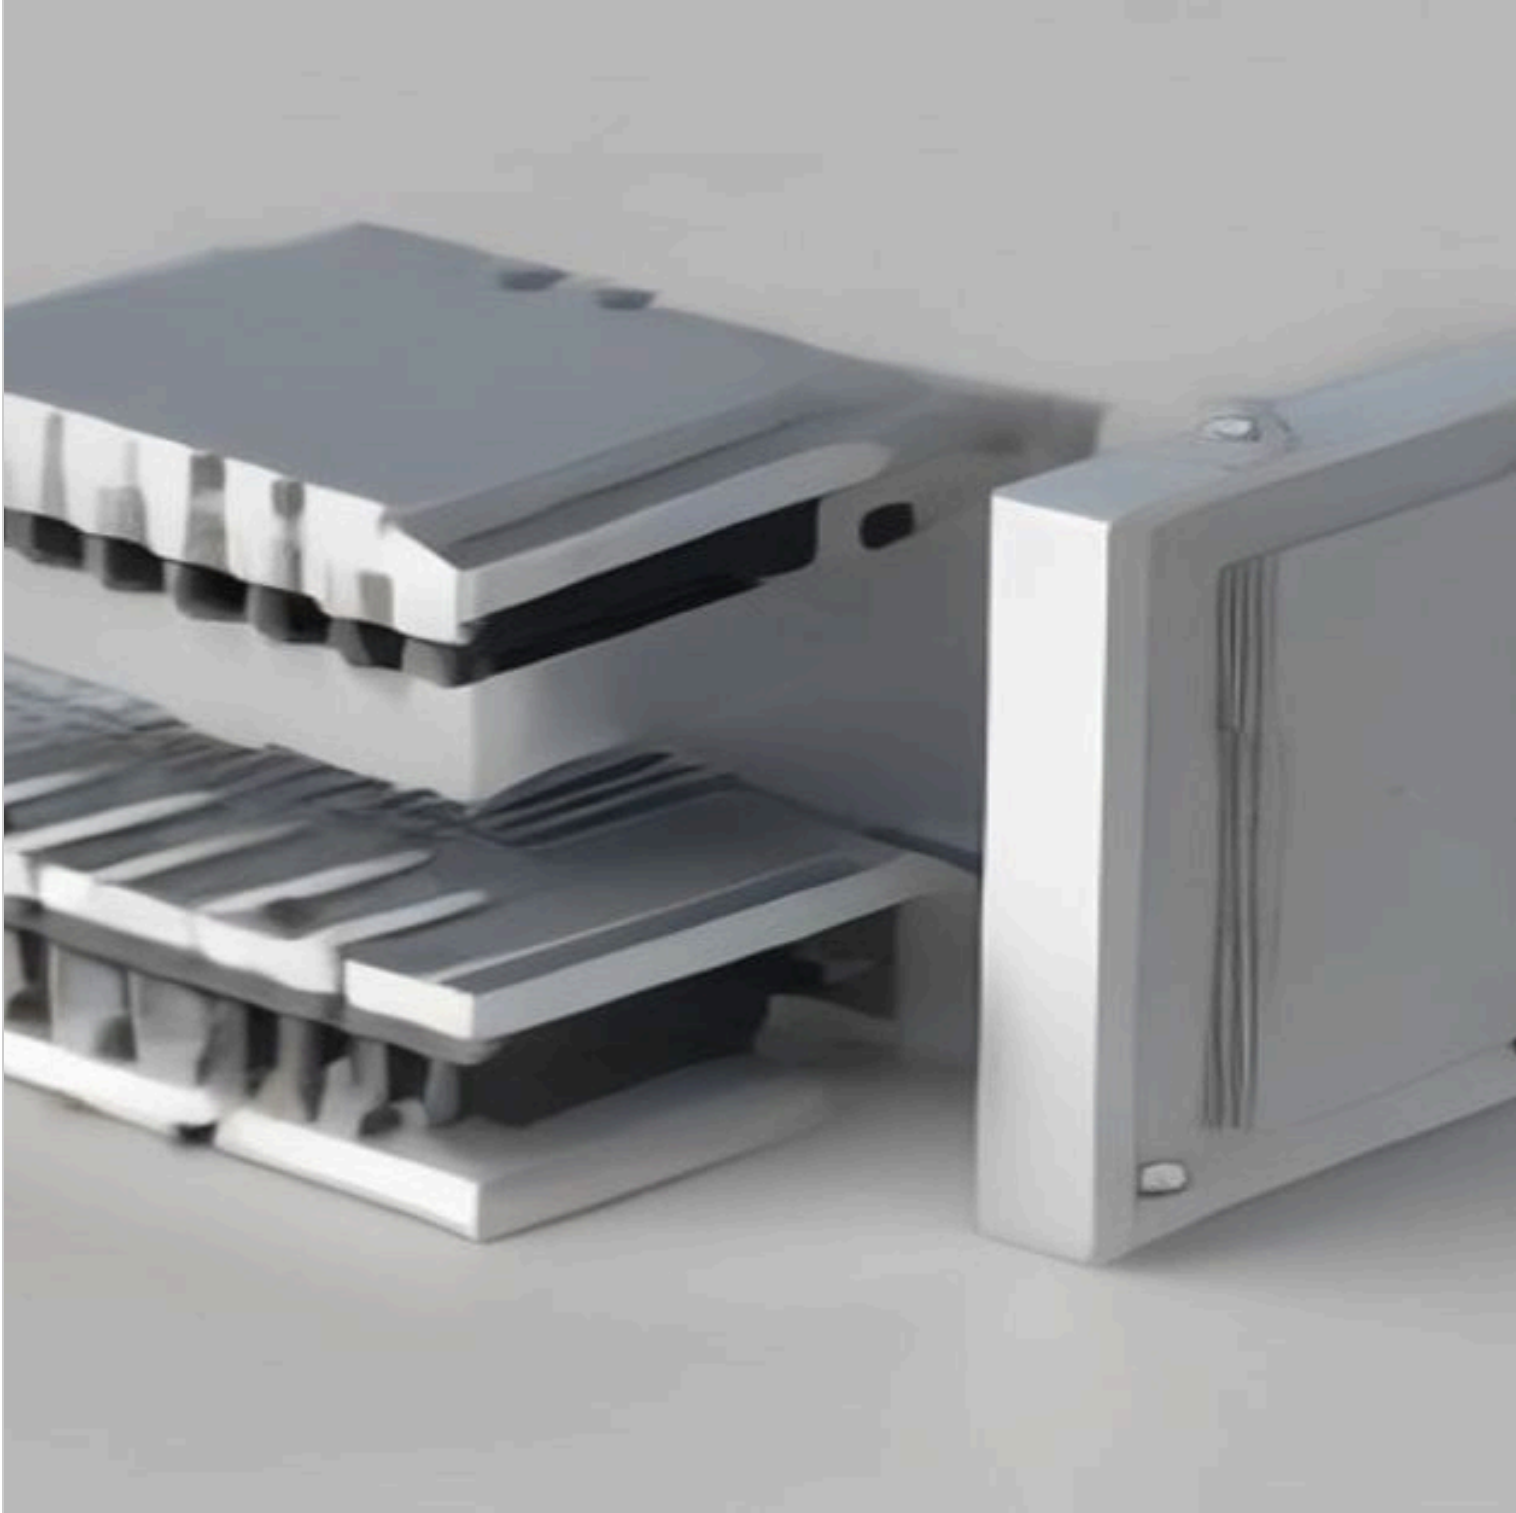

Stainless Steel Facade Dowel

MAT-57

MATERIAL	AISI 304 Stainless steel
SIZE	M8 × 80 mm
EXPANSION MECHANISM	Mechanical (impact)
MAX LOAD	Frc = 8.5 kN (concrete C20/25)
STANDARD	ETA-05/0005
APPLICATION	Fastening crown rails to concrete / brick


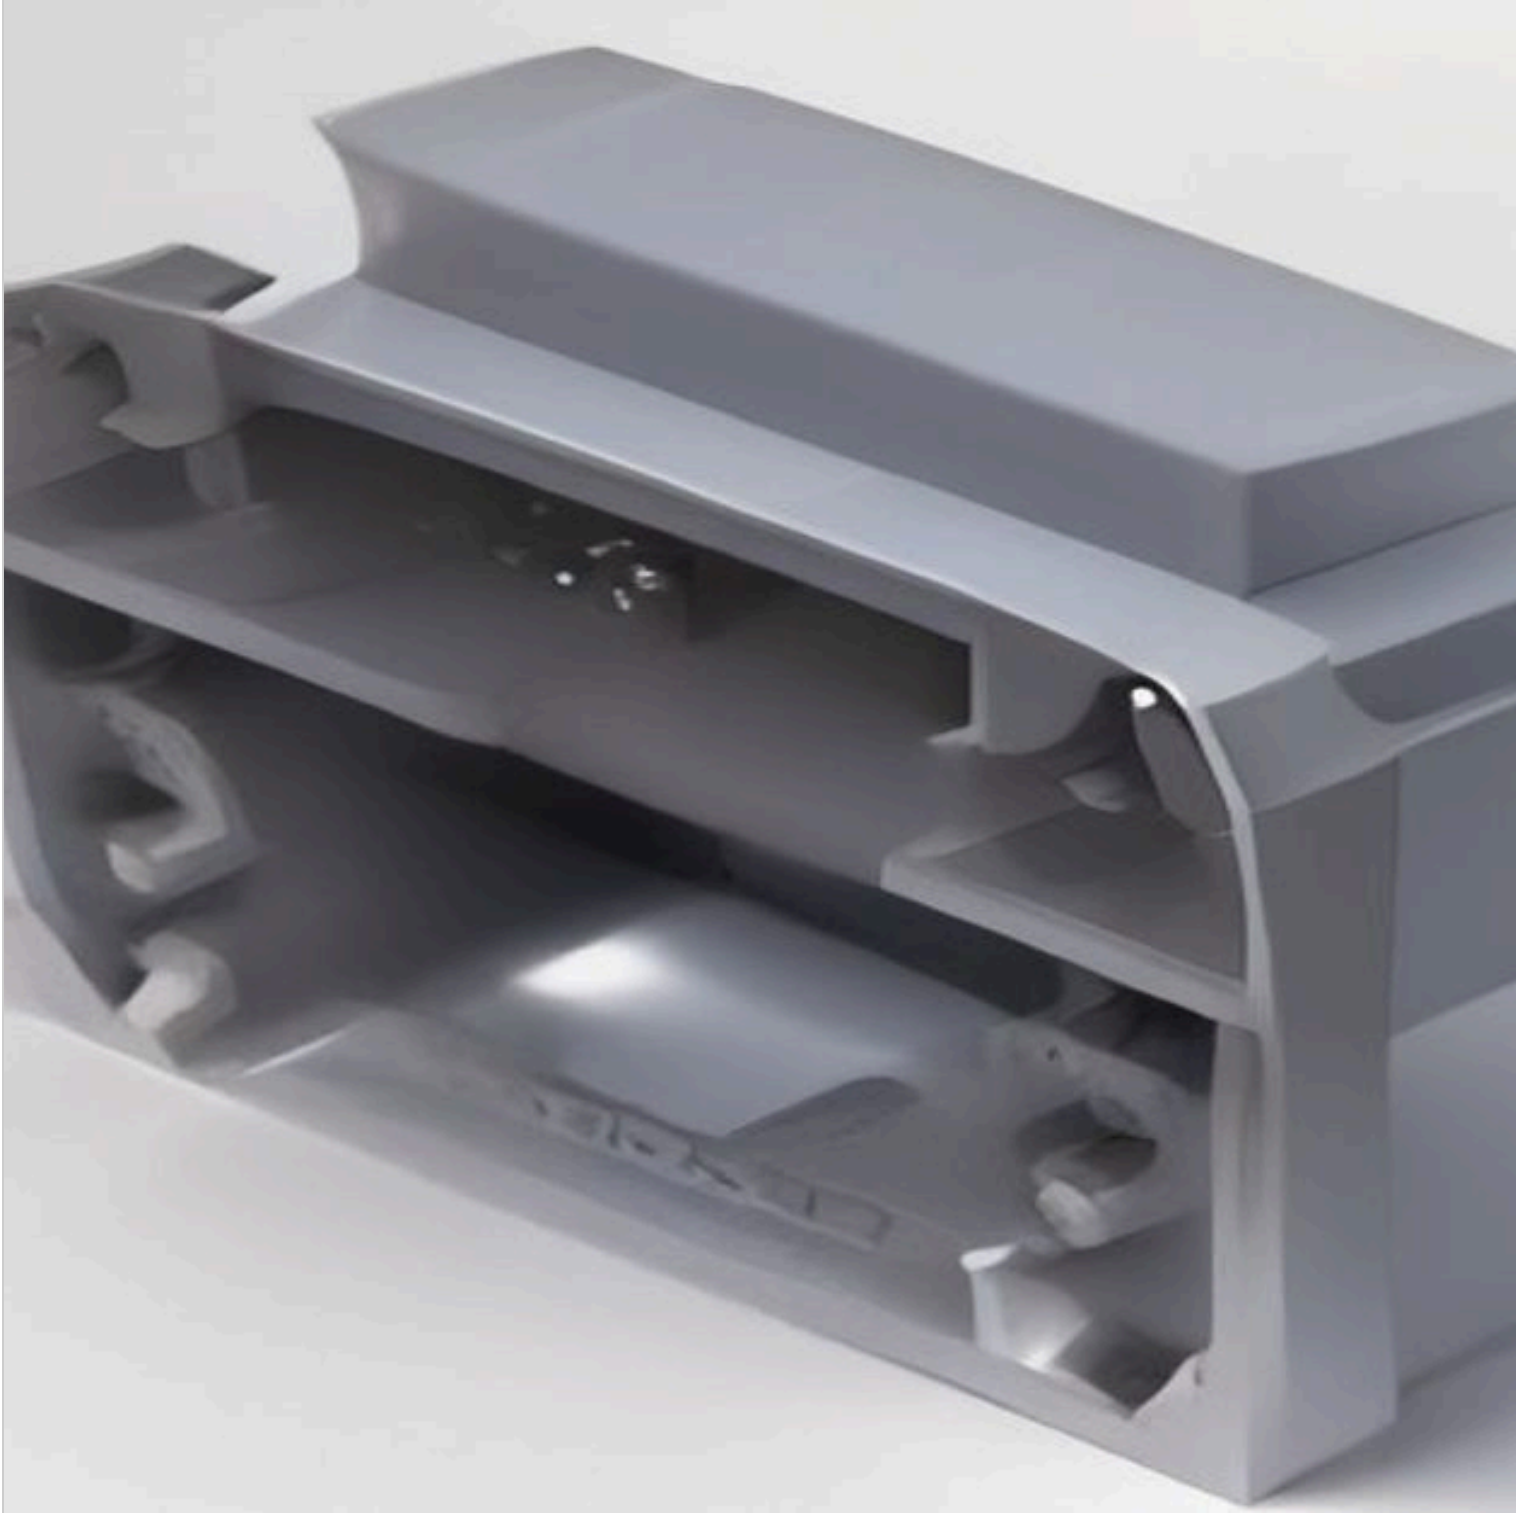


Plate Anchor Insulation Dowel

MAT-58


MATERIAL	Polyamide PA 6.6 GF30 + rod A4
SIZE	Ø 60 × 160 mm (plate Ø 60 mm)
PULL-OUT RESISTANCE	≥ 1.0 kN (concrete C12/15)
THERMAL CONDUCTIVITY	A4 min rod thermal conductivity
ETA	ETA-10/0309
APPLICATION	Attaching insulation to the wrap

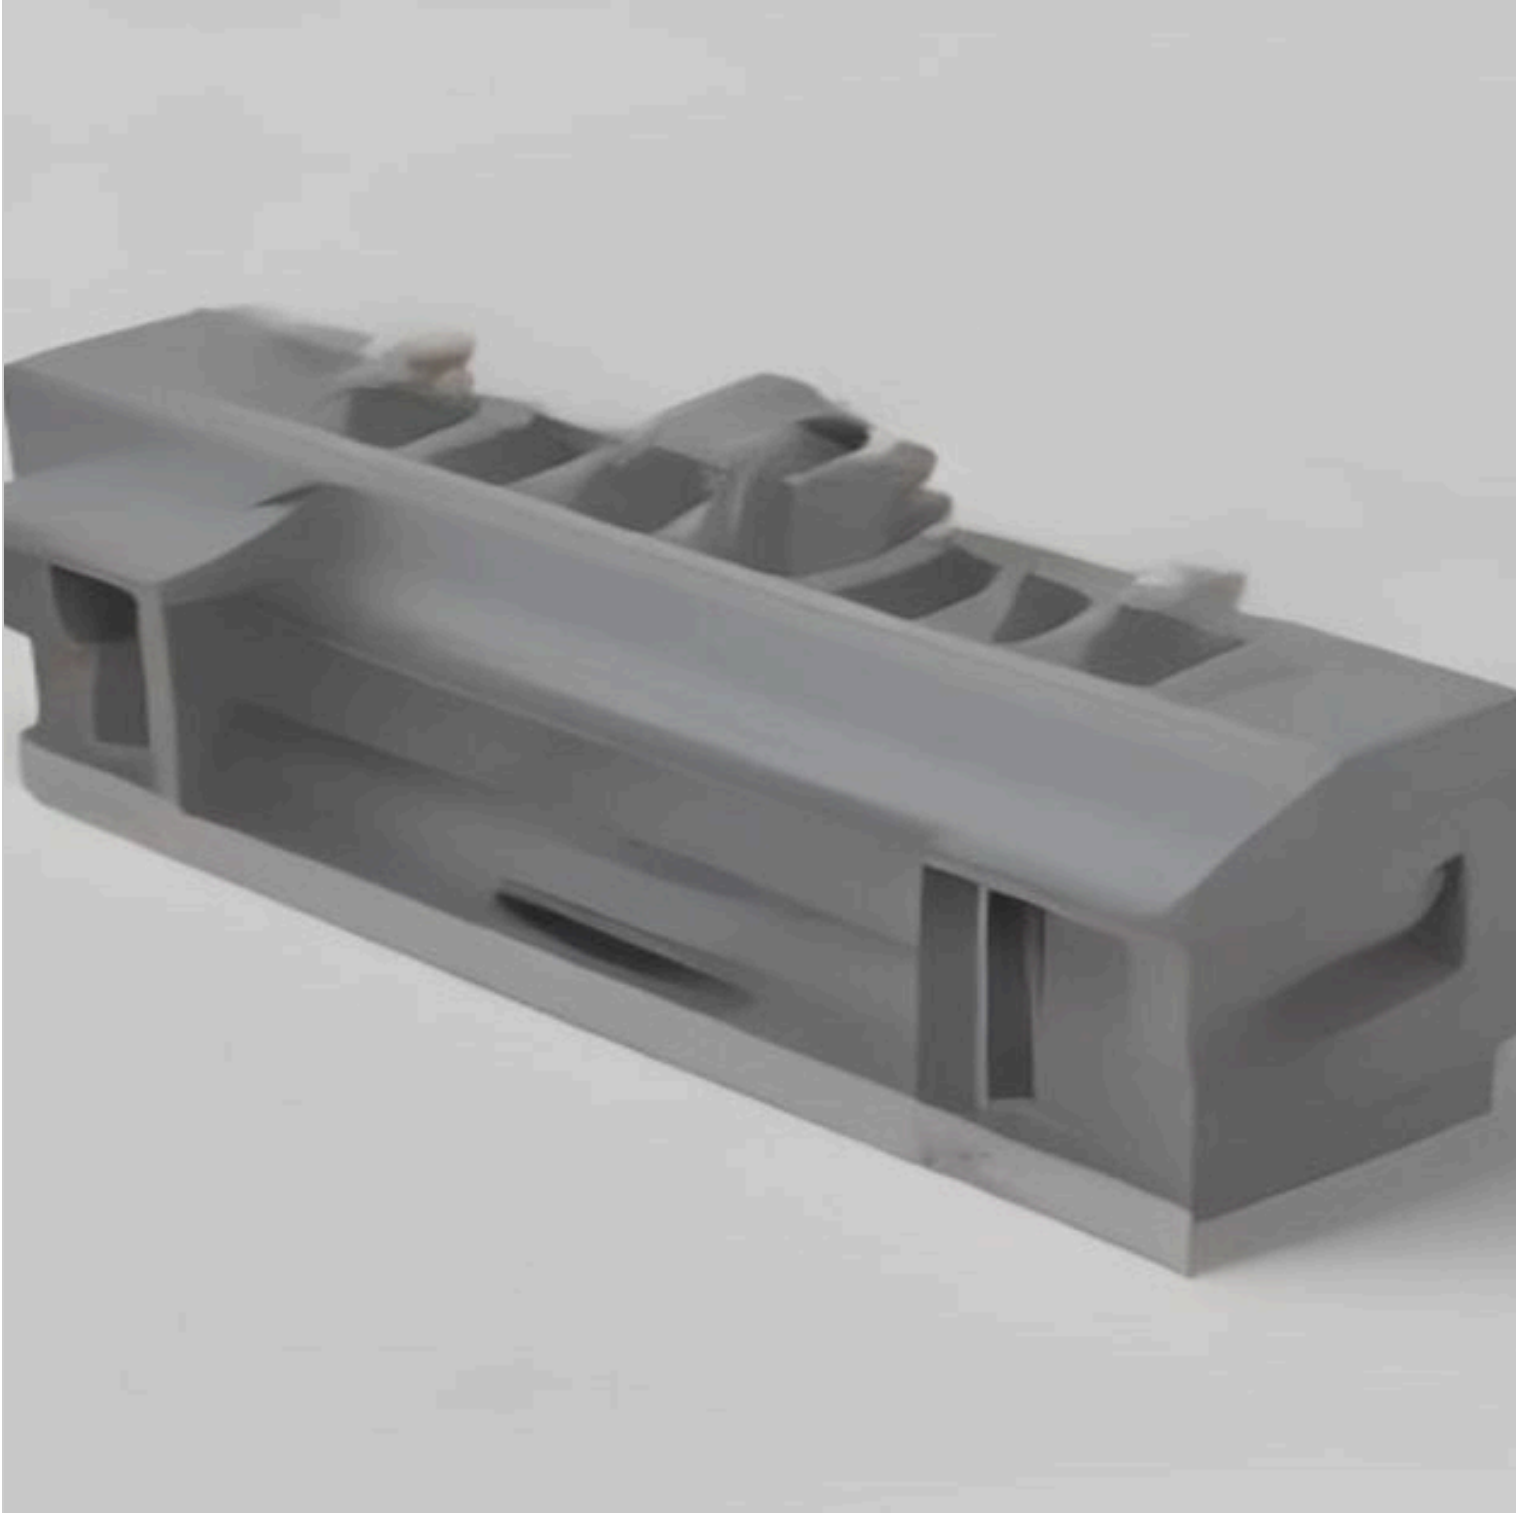

Injection Chemical Anchor

MAT-59

COMPOSITION	2K epoxy-acrylate resin
CARTRIDGE VOLUME	300 ml (≈ 15–25 anchors)
CURE TIME	20°C: 30 min; 0°C: 120 min
MAX LOAD	up to 35 kN (M16, concrete C20/25)
STANDARD	ETA-17/0120, ETAG 001
APPLICATION	Weak and hollow warps

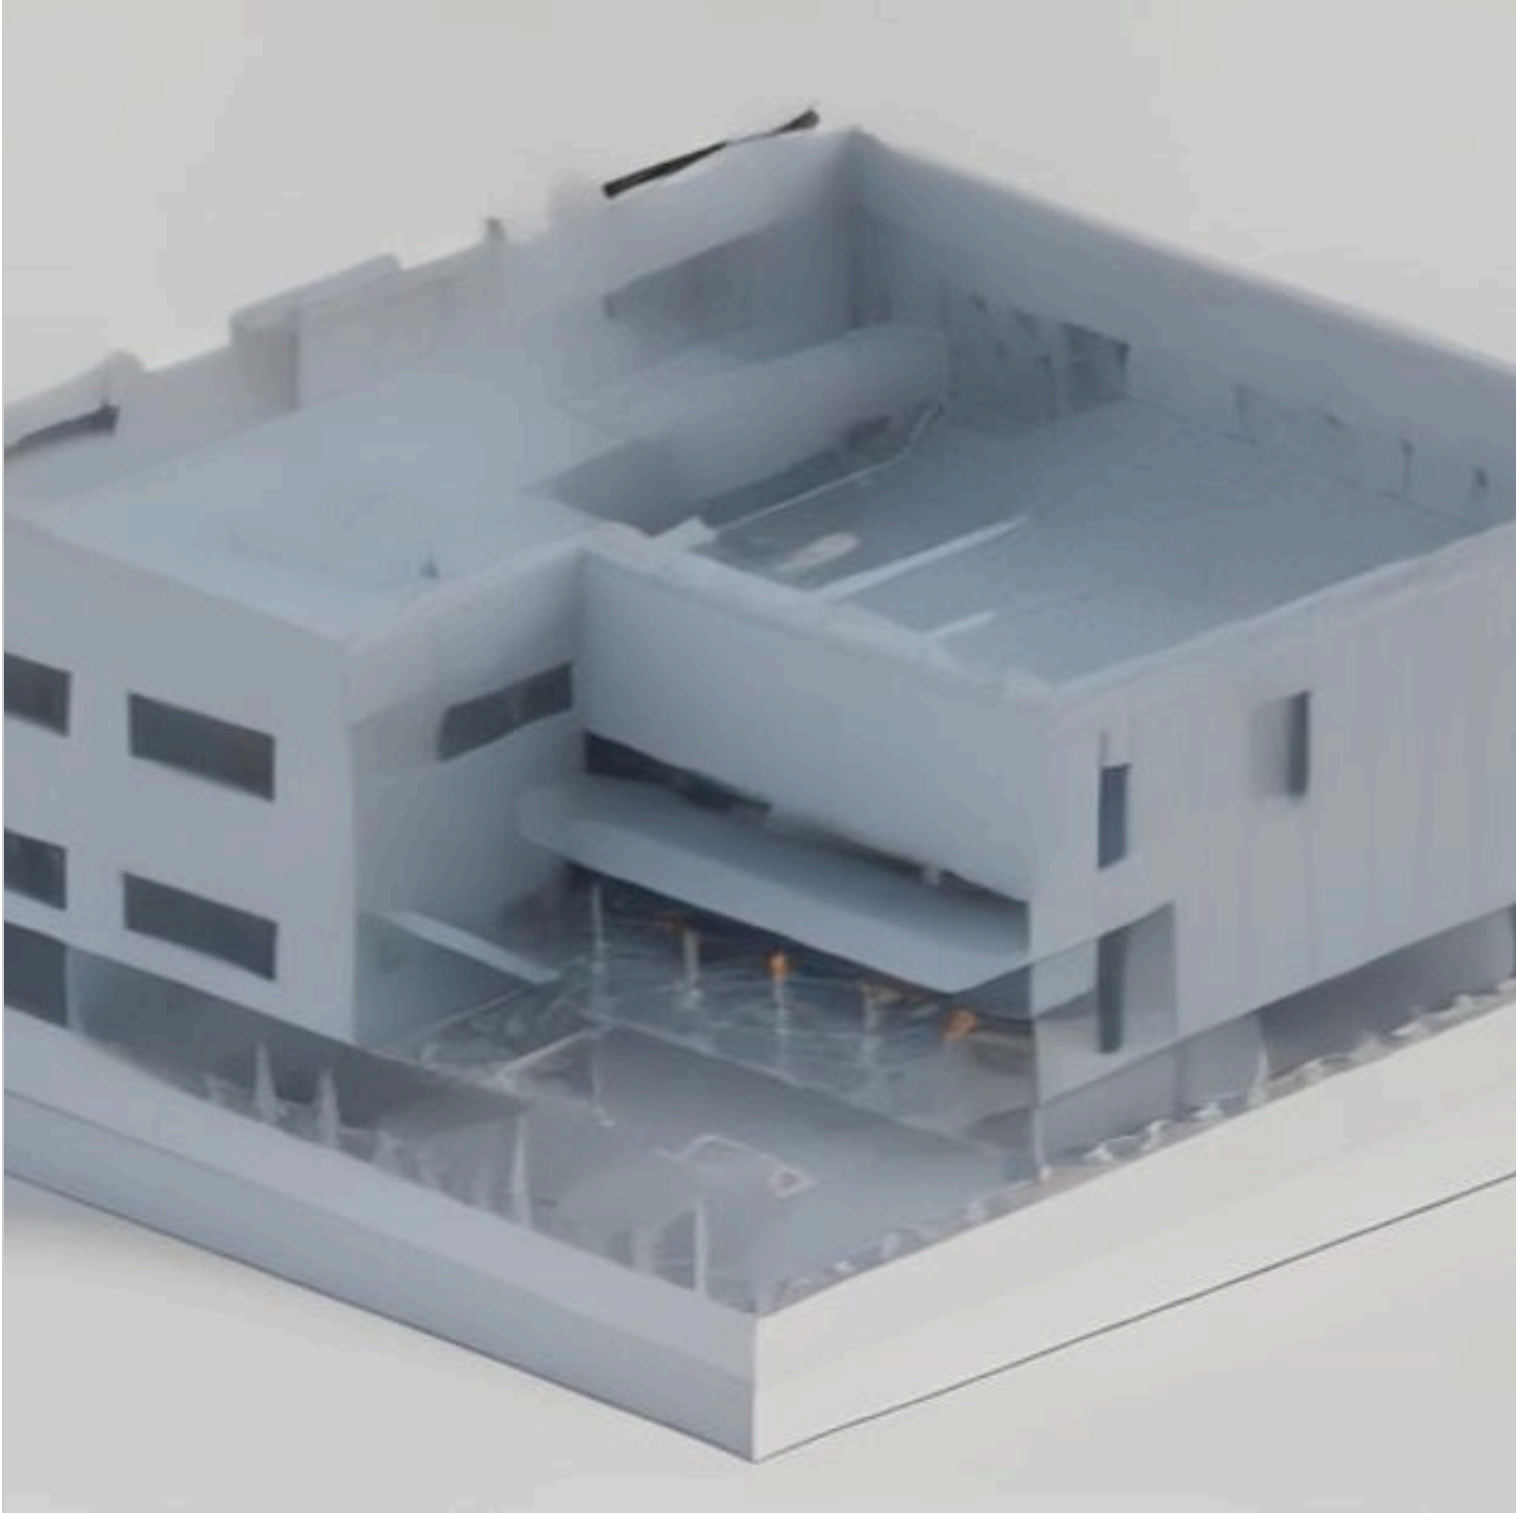

A2 Stainless Steel Structural Blind Rivets

MAT-60


MATERIAL	Body / rod: AISI 304/304 A2
DIAMETER × LENGTH	Ø 4.8 × 12 mm (standard)
TENSILE BREAKING LOAD	≥ 3 200 N (EN ISO 15977)
FLANGE DIAMETER	9.5 mm
GRIP RANGE	0.5–6.5 mm
PACKAGING	500 pcs / box



A4 Stainless Steel Structural Blind Rivets

MAT-61

MATERIAL	Body / rod: AISI 316/316 A4
DIAMETER × LENGTH	Ø 4.8 × 16 mm (heavy-duty)
TENSILE BREAKING LOAD	≥ 3 500 N (EN ISO 15977)
FLANGE DIAMETER	12.0 mm (Wide-Flange)
GRIP RANGE	0.5–9.5 mm
APPLICATION	Marine and aggressive environments

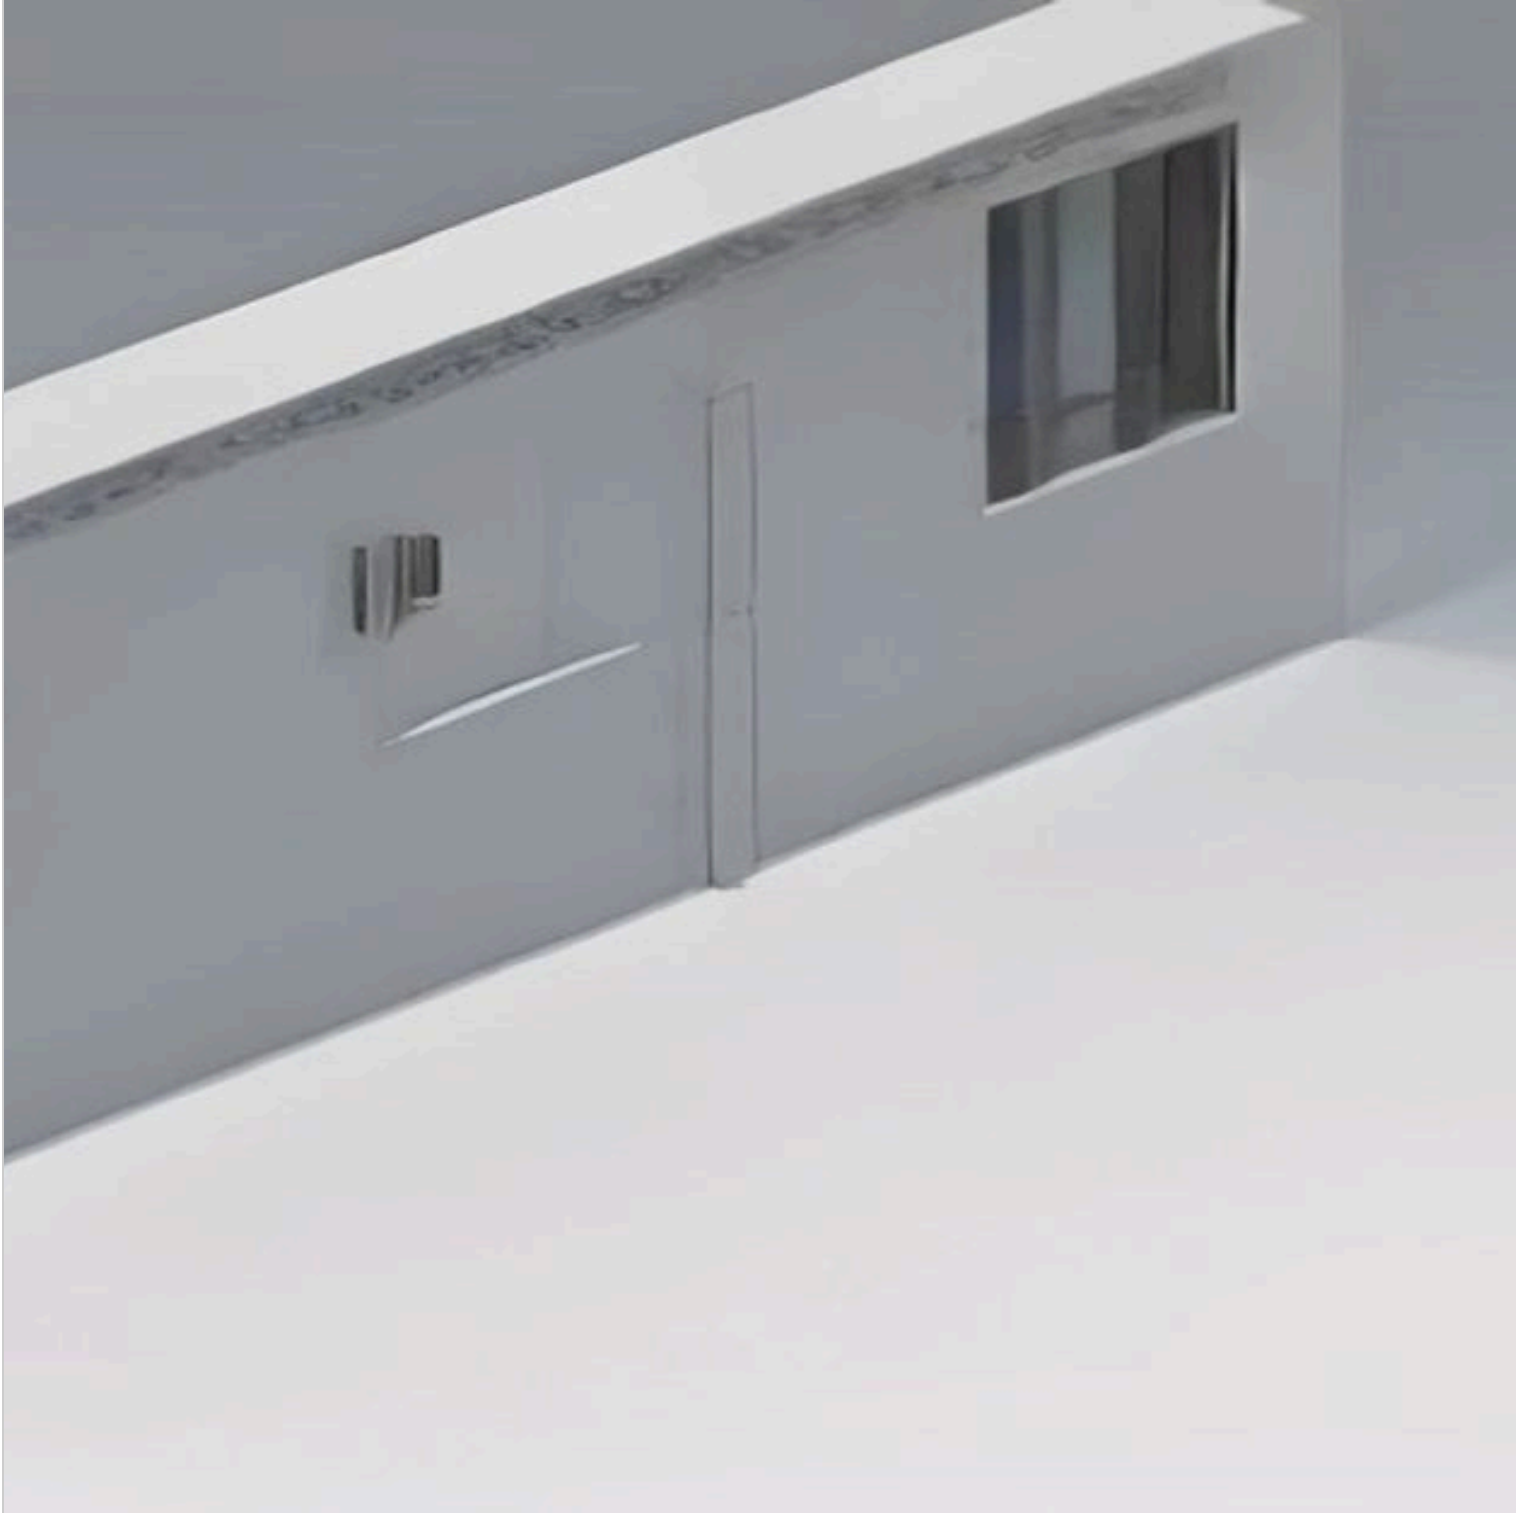

Facade Subsystem Connection Splice

MAT-62

MATERIAL	Aluminum EN AW-6063 T6
CROSS-SECTION	U 40 × 20 × 2.0 mm
STANDARD LENGTH	3 000 mm
MAX LOAD	0.8 kN/m linear meter
FINISH / COATING	Anodizing 15 µm (natural)
APPLICATION	Profile joining and lateral rigidity

