



KESHAR GYPSUM PVT. LTD.



*Build with Trust...!*



**KESHAR GYPSUM PVT. LTD.**

We Supply Rockwool Products

**ROCKWOOL®**

TECHNICAL INSULATION

**ROXUL ROCKWOOL TECHNICAL INSULATION INDIA PVT. LTD**

1	Material Composition:	Stone wool board insulation composed of rock fibers processed from the molten state into fibrous form and bonded with binder. Free from asbestos.
2	Density	40 - 200 kg/m <sup>3</sup>
3	Dimension	600MM × 1200MM 50MM
4	Thermal conductivity at 25°C mean Temperature	48kg/m <sup>3</sup> - < 0.036 W/m.K; 64kg/m <sup>3</sup> - < 0.035 W/m.K
5	Service Temperature	750 °C (un-faced slab)
6	Compressive Strength	Ranges from 2.0 to 44 KPA depending upon densities
7	Linear Shrinkage	Less than 2 %
8	Water vapor absorption	Less than 1 % by volume
9	Surface Burning Characteristics	
	• Flame Spread index:	≤ 25
	• Smoke developed index:	≤ 50





## KESHAR GYPSUM PVT. LTD.

We Supply Visaka Vnext Cement Boards



### VISAKA INDUSTRIES LIMITED

**Vboard** - Strong As Cement , Better Than Wood

**Vboard | Vpanel**

#### 1 Manufacturing:

Vboard is A Non Asbestos, Autoclaved Product. These Fibre Cement Boards are Manufactured by The Hatschek Process; Later The Product is Cured Using Hpsc Technology. The Curing is Done Under High Pressure Steam To Attain The Product's Strength And Stability.

#### 2 Material Composition:

Vboard Is Composed of A Composite Matrix Containing Special Grade Cellulose Fibres, Ordinary Portland Cement, Fine Silica, Quartz & Some Mineral Additives. Vboard Is Manufactured To Meet The Requirements Of IS 14862:2000. They Are Available In Standard Dimensions With Smooth And Textured Finishes To Meet The Requirements Of Modern Building Applications

#### 3 Applications




Compound wall cladding  
with Vplank

- ◆ **Wall Panelling:** V Designer Board With Textured Surface Finishes. "V Oceanic" And "V Wave" Are Available As Ready To Use as Wall Panels. **6mm, 8mm (6Ft x 4Ft)**
- ◆ **T-grid False Ceiling:** Vboard With Textured Surface Finishes - "V Lake & Hill" Offer Smart Choices For Modern T Grid False Ceilings In Commercial, Industrial And Residential Applications. **4mm, 6mm (6Ft x 4Ft)**
- ◆ **Mezzanine Flooring:** Vboard of thickness 18MM, 20MM, 25MM are Available to withstand stress and loads in stores and office etc.
- ◆ **Fire-rated Partitions:** Advantage of being fire resistant.
- ◆ **Acoustic Partitions:** Provide acoustic insulation up to 29 dB (For 8MM)
- ◆ **Kitchen Cabinets:** Advantage of being Water resistant. Free Moisture content with Water absorption of 22Hrs.
- ◆ **Shelves / Wardrobes:** Advantage of being Termite resistant. Screw Withdrawal (On Face)

#### 4 Sizes

- ◆ **Vboard :** Available in 6MM to 20 MM
- ◆ **Vplank :** Available in 10 Ft x 6 Inch

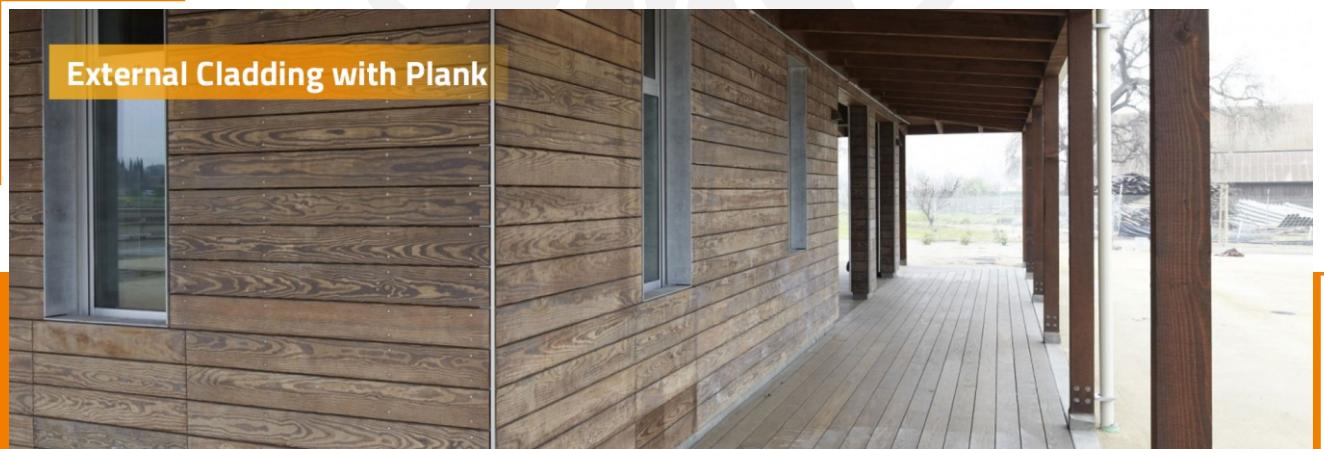

External Cladding with Plank



## GYPSUM BOARD

**Type :** Plain Gypsum Board | **Size :** 6Ft × 4Ft | **Thickness :** 12.5MM

**Application:**

**Type:** Fireline Gypsum Board | **Size:** 6Ft × 4Ft | **Thickness:** 15MM & 12.5MM

**Application:**

**Type:** Moisture Resistant Gypsum Board | **Size:** 6Ft × 4Ft | **Thickness:** 12.5MM

**Application:**

**Type:** Duraline Gypsum Board | **Size:** 6Ft × 4Ft | **Thickness:** 13MM

**Application:**



## GYPSTEEL ULTRA CEILING

**Type :** Ceiling Section | **Dimensions:** 80 × 26 × 51 × 3660

**Application:** The Main Supporting Section to Fix Plaster Board

**Type :** Perimeter Channel | **Dimensions:** 20 × 28 × 30 × 3660

**Application:** To Fix around walls / Partition

**Type :** Intermediate Channel | **Dimensions:** 15 × 45 × 15 × 3660

**Application:** Primary Section To Support The Ceiling Section

**Type :** Ceiling Angle | **Dimensions:** 25 × 10 × 3660

**Application:** To Provide Suspensions From The Structural Soffit.

**Type :** Floor and Ceiling Channel | **Dimensions:** 50/94/72/148 × 32 × 32 × 3660

**Application:** Fixed to floor and ceiling for securing

**Type :** I Stud | **Dimensions:** 48/70/92/146 × 38 × 3660

**Application:** For shaft wall.



## GYPROC JOINTING COMPOUND



**Easi-fill Jointing Compound Application:**  
For Jointing of Boards



**Pro-fill Jointing Compound Application:**  
For Quick Jointing of Boards



**Pro-Top**  
**Application:** Ready to work Product. Water not needed



## GYPROC PLASTRING



**Bond it**  
**Application:** For Bonding



**Champion Putty**  
**Application:** For Finishing



**Gyproc Elite**  
**Application:** For Leveling



## KESHAR GYPSUM PVT. LTD.

WE SUPPLY JK CEMENT LIMITED PRODUCTS

JK CEMENT LIMITED



### JK White Cement

**Type :** White Portfolio Cement

**Packaging:** 1Bag (25Nos. × 1Kg) | 1Bag (5Nos. × 5Kg) | 1Bag (25Kg) | 1Bag (50Kg)

**Application:** on Plastered wall for adhesive purpose of tiles or Marble



### JK Wall Putty

**Type :** White cement based fine powder (Putty)

**Packaging:** 1Bag (20Nos. × 1Kg) | 1Bag (4Nos. × 5Kg) | 1Bag (20Kg) | 1Bag (40Kg)

**Application:** Provides smooth finish for further application of all kinds of paints



### JK Primax

**Type :** White Cement based Primer

**Packaging:** 1Bucket (10 Kg)

**Application:** concealment of stains and reduction of blisters, extinction of paint durability. Provides smoother finish for paint.



### Badam Chhap Gypsum Powder

**Type :** Gypsum Powder

**Packaging:** 1Bag (15Kg)

**Application:** For decorative Walls and Ceilings

The secret of the  
INTERNATIONAL  
**Wall Painting  
Champion**  
**J.K. Wall Putty...**

Deewarein Bol Uthengi


**JK PrimaxX™**  
White Cement Based Primer

Best Finish, Best Nikhaar  
Bahi Deewaron ka Sadha Yaar

Best Solved for Exterior


Call Now: (022) 22239-22299

## MINERAL FIBRE TILE

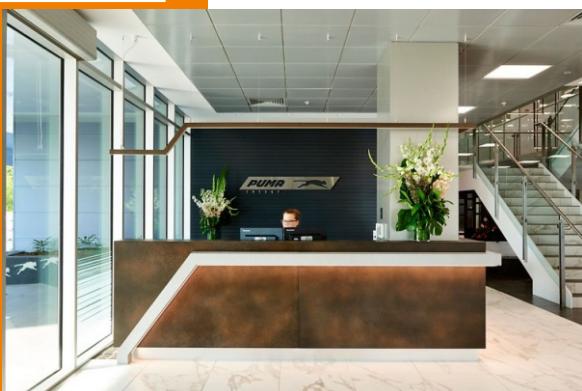

<b>Sound Absorption(NRC)</b>	0.70
<b>Sound Blocking (CAC)</b>	28
<b>Light Reflectance</b>	85%
<b>Recycled Content</b>	Up to 65%
<b>Sag/Humidity Resistance</b>	RH95
<b>Fire Performance</b>	A2-s1,d0
<b>Durability</b>	Disinfectant Resistance, Soil Resistance, Scratch Resistance, Washability
<b>Number of Products</b>	23 Mineral Fibre Products
<b>Design of Tiles</b>	Tegular, Board, Microloop

## WOOD CEILING

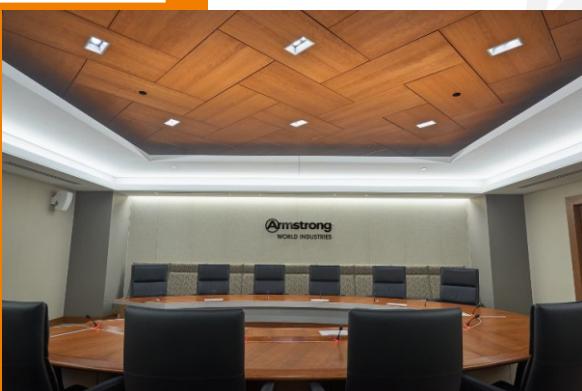

<b>Sound Absorption(NRC)</b>	Up to 0.5
<b>Sag/Humidity Resistance</b>	RH70
<b>Fire Performance</b>	Conforming Fire Performance
<b>Number of Products</b>	3 Wood Ceiling, Plank, Panel
<b>Design of Tiles</b>	Board, Microloop

## BAFFLE CEILING



<b>Sound Absorption(NRC)</b>	0.65
<b>Sabin</b>	Up to 1.45
<b>Light Reflectance</b>	Up to 87%
<b>Recycled Content</b>	Up to 80%
<b>Sag/Humidity Resistance</b>	RH90
<b>Fire Performance</b>	B-s1,d0
<b>Number of Products</b>	4 Baffle Ceiling
<b>Design of Tiles</b>	Customise

## METAL CEILING



<b>Sound Absorption (NRC)</b>	Up to 0.8
<b>Sound Blocking (CAC)</b>	Up to 44
<b>Light Reflectance</b>	Up to 77%
<b>Recycled Content</b>	Up to 50%
<b>Sag/Humidity Resistance</b>	RH95
<b>Fire Performance</b>	Conforming Fire Performance
<b>Durability</b>	Soil Resistance, Scrubbability, Washability
<b>Number of Products</b>	6 Metal Ceiling
<b>Design of Tiles</b>	Layin, Microloop



**KESHAR GYPSUM PVT. LTD.**

We Supply Armstrong Products

**Armstrong®**  
CEILING SOLUTIONS

## SUPRAFINE XL High Recycled Content



**Face Dimensions**

9/16 in

Exposed Tee

**Profile Types**

Electrogalvanized Steel,

**Materials**

Hot-dipped Galvanized Steel,

Painted Galvanized Steel

**DEF**

Heavy Duty

**Seismic Categories**

3000MM, 1200MM, 600MM

**Duty Ratings**

**Available in Sizes**

## PRELUDE XL High Recycled Content



**Face Dimensions**

15/16 in

Exposed Tee

**Profile Types**

Hot-dipped Galvanized Steel

**Materials**

**DEF**

Heavy Duty

**Seismic Categories**

3000MM, 1200MM, 600MM

**Duty Ratings**

**Available in Sizes**

## SILHOUETTE XL 9/16" Bolt Slot - 1/4" Reveal



- ◆ Seismic Rx Suspension System saves time and money
- ◆ Hot-dipped galvanized coating inhibits red rusting
- ◆ Available with black reveal
- ◆ Rotary-stitched for additional torsional strength and installation stability
- ◆ 10-Year Limited System Warranty; 30-Year Limited Ceiling Systems Warranty when used with HumiGuard Plus products
- ◆ FASTSIZE main beams and cross tees can be ordered with special sizing and route spacing for your project needs in one carton minimums with two week lead times

**Available in Sizes:** 3000MM, 1200MM, 600MM



**ROCKWOOL®**  
TECHNICAL INSULATION

 **Gyproc**  
SAINT-GOBAIN



**MYK LATICRETE**

*Supply & Apply*



**Armstrong®**  
CEILING SOLUTIONS



**KESHAR GYPSUM PVT. LTD.**

**Corporate Office:**  
Sr. 653, Katraj Gangadham Road,  
Bibwewadi, Pune 411 037.  
**99600 00016 / 99600 00019**

**PCMC Branch:**  
Sr. No. 33/2, Opposite D-Mart,  
Hinjawadi wakad Road, Hinjawadi,  
Pune 411 057 | **99600 00014**

**Branch Office:**  
E48, Marketyard,  
Near Mahalaxmi Market,  
Pune 411 037 | **99600 00018**