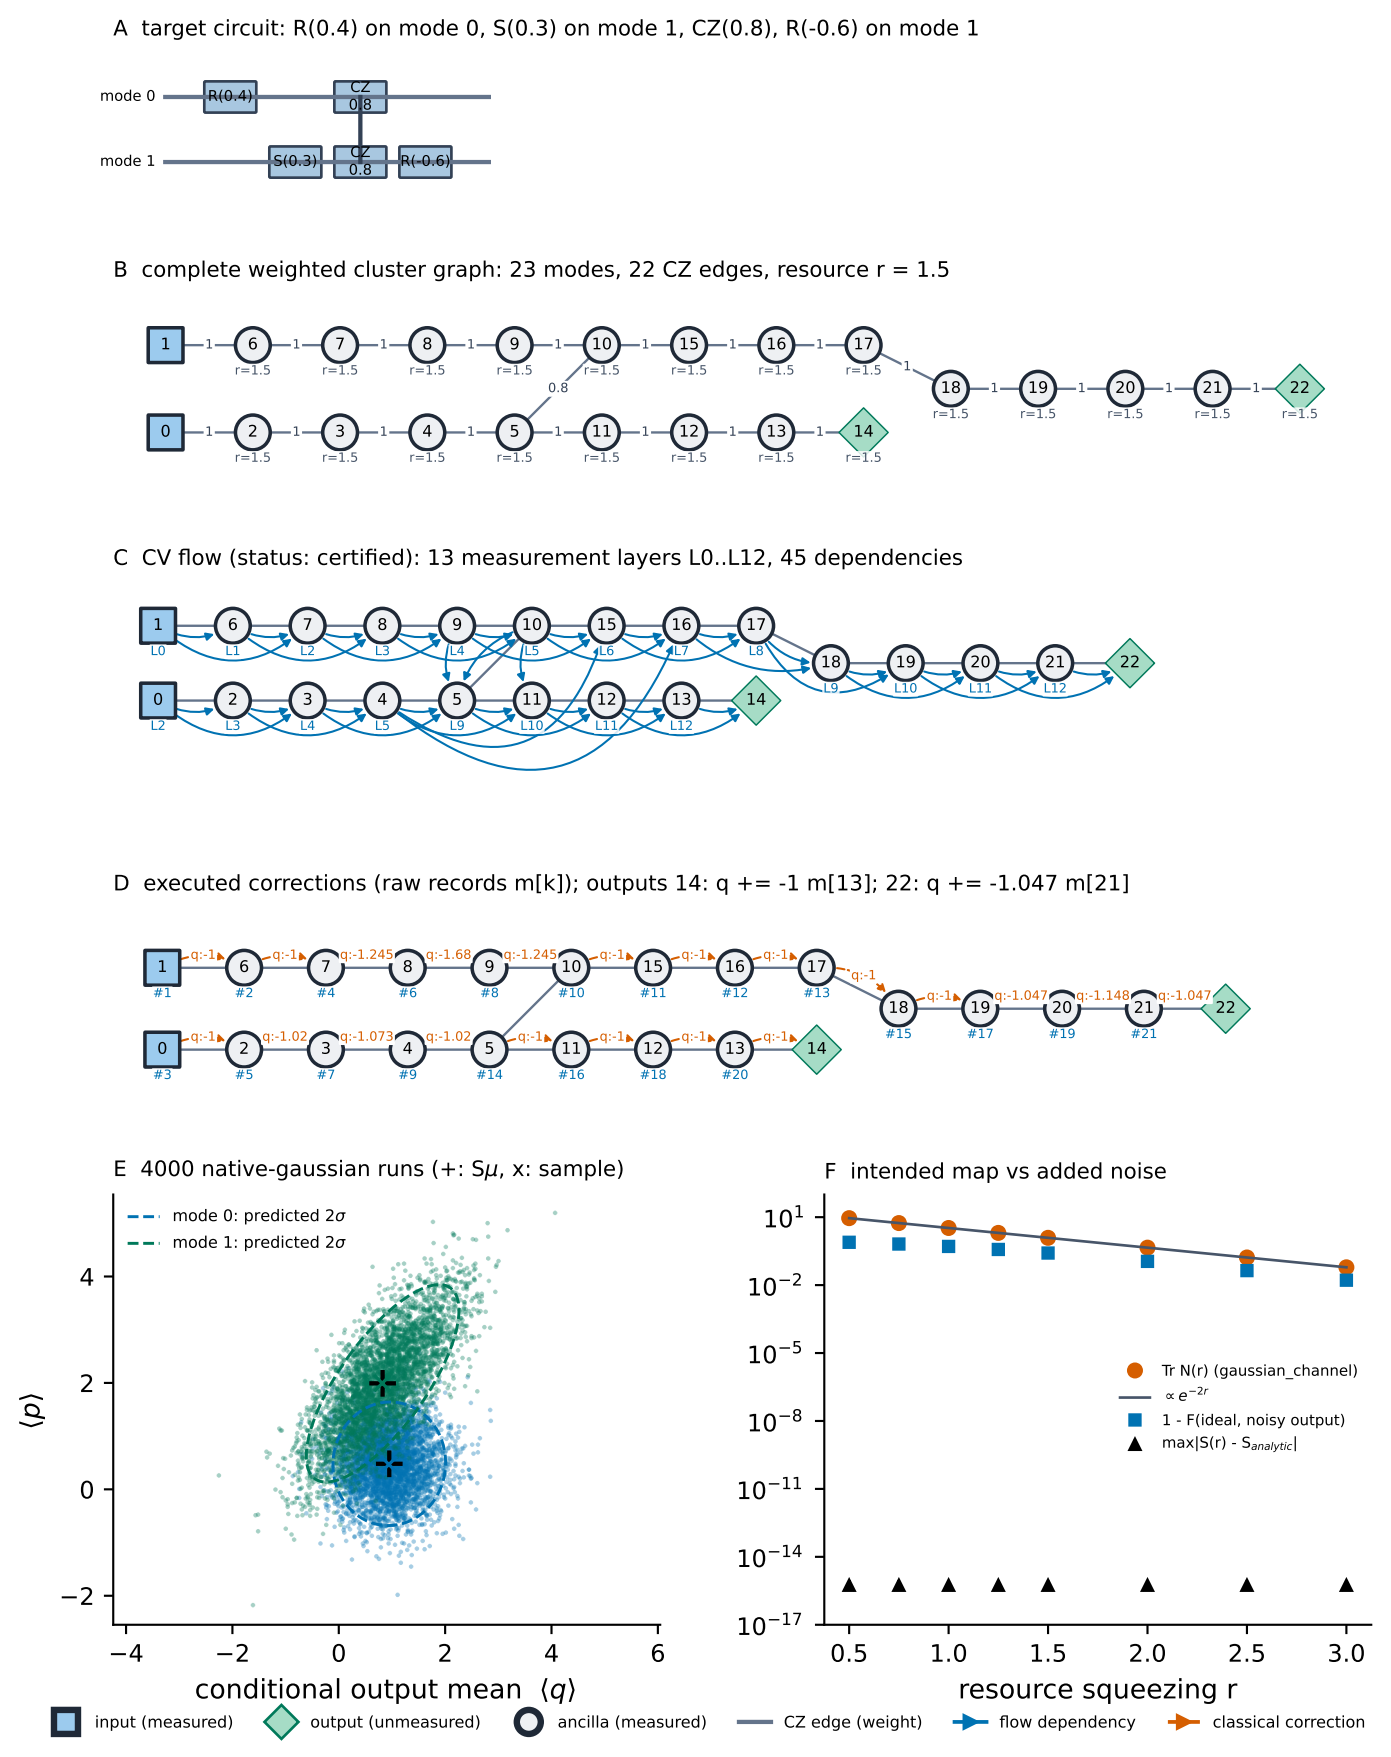

A target circuit: R(0.4) on mode 0, S(0.3) on mode 1, CZ(0.8), R(-0.6) on mode 1
mode 0
mode 1
R(0.4)
S(0.3)
CZ 0.8
CZ 0.8
R(-0.6)
B complete weighted cluster graph: 23 modes, 22 CZ edges, resource r = 1.5
C CV flow (status: certified): 13 measurement layers L0..L12, 45 dependencies
D executed corrections (raw records m[k]); outputs 14: q += -1 m[13]; 22: q += -1.047 m[21]
E 4000 native-gaussian runs (+: Sμ, x: sample)
mode 0: predicted 2σ
mode 1: predicted 2σ
⟨p⟩
conditional output mean ⟨q⟩
F intended map vs added noise
Tr N(r) (gaussian_channel)
∝ e^{−2r}
1 - F(ideal, noisy output)
max|S(r) - S_analytic|
resource squeezing r
input (measured)
output (unmeasured)
ancilla (measured)
CZ edge (weight)
flow dependency
classical correction