







Sizing The Tracks

Measure the width of the top of your opening. Using a set square mark a straight line across the Top Track A. Measure the width of the base of your opening. Mark a corresponding line across the Floor Track B. Cut the tracks using a tine tooth hacksaw or aluminum cutter machine



Positioning the Doors

Position your doors in the appropriate combinations shown below, to allow for overlapping






Installing the Doors

Always locate the back door's first. Angle the door and insent the top of the door into the top track Straighten the door and lower the bottom wheels



Installing the Tracks

Top Track-Position the Track into the top of the opening.. Mark where holes need to be drilled in the track (we recommend a fixing at each end and center then at approx 500mm intervals in between). Drill and plug the header/celling in line with the holes drilled in the track and fix the top track using the long screvis provided.

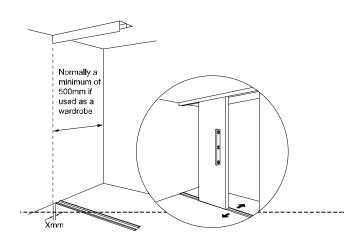


Floor Track Position the track on the floor of the opening. Mark where holes need to be drilled in the track (we

recommend a fixing at each end and center chen ac

regular intervals in between flefore permanently hitting the floor track to your fit fit the door into place and using a sprit level adjust the Floor Track so the door becomes

into the Floor Track grooves.



Adjusting the Doors

Align the doors so the end doors are plumb to the side walls. Adjunt the bottom wheels using a screwdriver, altening the height and angle of each door. Turn the screw clockwise to rane the door and ant-clockwise to lower the door.

6

Engaging Anti-jump Clips


Clips must be engaged to ensure doors do not leave tracks



SINGLE TRACK - 12MM







: Regular, Oxide anodize ★ Finish Material : Aluminium Grade 6063-T6 ■ Specification : High tensile and yield strength,

> Perfect dimension, Hassle free installation

Product Code	Size	MRP Per Pcs	Master Pack
MST-5408	8 Feet	0000/-	20 Pcs
MST-5412	12 Feet	0000/-	20 Pcs
MST-5408A	8 Feet - Anodize	0000/-	20 Pcs
MST - 5412A	12 feet - Anodize	0000/-	20 Pcs

SINGLE TRACK RUNNER



: Black Finish ▼ Finish

: Mild Steel, Nylon Wheel Material

■ Specification : Smooth Bearing Wheel for free Moment

Easy to install

Product	ltem	MRP	Master
Code		Per Set	Pack
MSF-5501	Single Track Runner	0000/-	100 Set



ONLY TAKLU





: Regular, Oxide anodize ★ Finish : Aluminium Grade 6063-T6 Material

Product Code	Size	MRP Per Pcs	Master Pack
MST-5608	8 Feet	0000/-	20 Pcs
MST-5612	12 Feet	0000/-	20 Pcs
MST-5608A	8 Feet - Anodize	0000/-	20 Pcs
MST-5612A	12 feet - Anodize	0000/-	20 Pcs

SINGLE TRACK RUNNER



		3 .
28	Material	: Aluminium Grade 6063-T6
38	Specification	: High tensile and yield strength,
		Perfect dimension,
		Hassle free installation

★ Finish


: Regular, Oxide anodize

Product	Size	MRP	Master
Code		Per Pcs	Pack
MST-5708	12 Feet	0000/-	20 Pcs

12 Feet - Anodize

0000/-

20 Pcs



U-TYPE SINGLE TRACK RUNNER



M Finish : Zinc Finish

MST-5712

Material : Mild Steel, Nylon Wheel

■ Specification : Smooth Bearing Wheel for free Moment

Easy to install

Product Code	Item	MRP Per Pcs	Master Pack
MST-5801	U Type Single Track Runner	0000/-	20 Pcs




SINGLE TRACK - 23MM



▼ Finish	: Regular, Oxide anodize
Material	: Aluminium Grade 6063-T6
■ Specification	: High tensile and yield strength


Perfect dimension, Hassle free installation

Product Code	Size	MRP Per Pcs	Master Pack
MST-5908	8 Feet	0000/-	20 Pcs
MST-5912	12 Feet	0000/-	20 Pcs
MST-5908A	8 Feet - Anodize	0000/-	20 Pcs
MST-5912A	12 feet - Anodize	0000/-	20 Pcs



DOUBLE TRACK





➢ Finish : Regular, Oxide anodize
➢ Material : Aluminium Grade 6063-T6
➢ Specification : High tensile and yield strength,

Perfect dimension, Hassle free installation

Product Code	Size	MRP Per Pcs	Master Pack
MST-6006	6 Feet	0000/-	20 Pcs
MST-6065	6.5 Feet	0000/-	20 Pcs
MST-6008	8 Feet	0000/-	20 Pcs
MST-6010	10 Feet	0000/-	20 Pcs
MST-6012	12 Feet	0000/-	20 Pcs
MST-606A	6 Feet - Anodize	0000/-	20 Pcs
MST-6065A	6.5 Feet - Anodize	0000/-	20 Pcs
MST-6008A	8 Feet - Anodize	0000/-	20 Pcs
MST-6010A	10 Feet - Anodize	0000/-	20 Pcs
MST-6012A	12 feet - Anodize	0000/-	20 Pcs







▼ Finish : Black Finish

★ Material : Mild Steel, Nylon Wheel

■ Specification: Smooth Bearing Wheel for free Moment

Easy to install, Bearing Top Support

Product Code	Item	MRP Per Pcs	Master Pack
MSF-6101	Double Track Runner - Bearing	430/-	20 Set

DOUBLE TRACK RUNNER - SOFT CLOSE



⋈ Finish : Black Finish

■ Material : Mild Steel, Nylon Wheel

■ Specification: Smooth Bearing Wheel for free Moment


Easy to install, Bearing Top Support

Product	Item	MRP	Master
Code		Per Pcs	Pack
MSF-6201	Double Track Runner - Soft Close	820/-	40 Set



U TRACK / C TRACK






➤ Finish : Regular, Oxide anodize
➤ Material : Aluminium Grade 6063-T6
➤ Specification : High tensile and yield strength,

Perfect dimension, Hassle free installation

Product Code	Size	MRP Per Pcs	Master Pack
MST-6306	6 Feet	0000/-	20 Pcs
MST-6365	6.5 Feet	0000/-	20 Pcs
MST-6308	8 Feet	0000/-	20 Pcs
MST-6310	10 Feet	0000/-	20 Pcs
MST-6312	12 Feet	0000/-	20 Pcs
MST-6306A	6 Feet - Anodize	0000/-	20 Pcs
MST-6365A	6.5 Feet - Anodize	0000/-	20 Pcs
MST-6308A	8 Feet - Anodize	0000/-	20 Pcs
MST-6310A	10 Feet - Anodize	0000/-	20 Pcs
MST-6312A	12 feet - Anodize	0000/-	20 Pcs

U TRACK NO 3





✗ Finish : Regular, Oxide anodize
✗ Material : Aluminium Grade 6063-T6
✗ Specification : High tensile and yield strength,

Perfect dimension, Hassle free installation

Product Code	Size	MRP Per Pcs	Master Pack
MST-6406A	6 Feet - Anodize	0000/-	20 Pcs
MST-6465A	6.5 Feet - Anodize	0000/-	20 Pcs
MST-6408A	8 Feet - Anodize	0000/-	20 Pcs
MST-6410A	10 Feet - Anodize	0000/-	20 Pcs
MST-6412A	12 feet - Anodize	0000/-	20 Pcs



4 WHEEL / 8 WHEEL RUNNER



▼ Finish : SS Finish

★ Material : Stainless Steel, Nylon Wheel

■ Specification: Smooth Bearing Wheel for free Moment

Easy to install, Bearing Top Support

Product Code	Item	MRP Per Pcs	Master Pack
MSF-6504	4 Whee l	914/-	40 Set
MSF-6508	8 Wheel	1333/-	40 Set

4 WHEEL / 8 WHEEL RUNNER SOFT CLOSE



■ Material : Aluminum Body, Nylon Wheel


➤ Specification: 2 Side Soft Closing System,


Minimum Door length, Supporting Heavy Door

Product Code	ltem	MRP Per Pcs	Master Pack
MSF-6642	4 Wheel 2-Way Soft Close	0000/-	10 Set
MSF-6682	8 Wheel 2-Way Soft Close	0000/-	10 Set



SLIM TRACK SINGLE






Finish : Regular, Oxide anodize
Material : Aluminium Grade 6063-T6
Specification : High tensile and yield strength,

Perfect dimension, Hassle free installation

Product Code	Size	MRP Per Pcs	Master Pack
MST-6706	6 Feet	0000/-	20 Pcs
MST-6765	6.5 Feet	0000/-	20 Pcs
MST-6708	8 Feet	0000/-	20 Pcs
MST-6710	10 Feet	0000/-	20 Pcs
MST-6712	12 Feet	0000/-	20 Pcs
MST-6706A	6 Feet - Anodize	0000/-	20 Pcs
MST-6765A	6.5 Feet - Anodize	0000/-	20 Pcs
MST-6708A	8 Feet - Anodize	0000/-	20 Pcs
MST-6710A	10 Feet - Anodize	0000/-	20 Pcs
MST-6712A	12 Feet - Anodize	0000/-	20 Pcs

SLIM TRACK DOUBLE





Finish : Regular, Oxide anodize
Material : Aluminium Grade 6063-T6
Specification : High tensile and yield strength,

Perfect dimension, Hassle free installation

Product Code	Size	MRP Per Pcs	Master Pack
MST-6806	6 Feet	0000/-	20 Pcs
MST-6865	6.5 Feet	0000/-	20 Pcs
MST-6808	8 Feet	0000/-	20 Pcs
MST-6810	10 Feet	0000/-	20 Pcs
MST-6812	12 Feet	0000/-	20 Pcs
MST-6806A	6 Feet - Anodize	0000/-	20 Pcs
MST-6865A	6.5 Feet - Anodize	0000/-	20 Pcs
MST-6808A	8 Feet - Anodize	0000/-	20 Pcs
MST-6810A	10 Feet - Anodize	0000/-	20 Pcs
MST-6812A	12 Feet - Anodize	0000/-	20 Pcs



SLIM TRACK RUNNER - BRUSH TYPE



Finish : Silver Finish, Grey Finish

⋈ Material : Mild Steel, High Grae Nylon Wheel

■ Connector : Soft close Type,

Soft close capacity 45 kg, Runner Capacity 60 kg,

Can be used in Glass Shutter Sliding

2 Side Soft Close

Product Code	ltem	MRP Per Pcs	Master Pack
MSF-6901	Slim Track Runner - Brush Type	2143/-	15 Set

SLIM TRACK RUNNER - CROSS TYPE



Finish : Silver Finish, Grey Finish

■ Material : Mild Steel, High Grae Nylon Wheel

★ Connector : Soft close Type,

Soft close capacity 45 kg, Runner Capacity 60 kg,

Can be used in Glass Shutter Sliding

2 Side Soft Close

Product	ltem	MRP	Master
Code		Per Pcs	Pack
MSF-7001	Slim Track Runner - Cross Type	2143/-	15 Set