


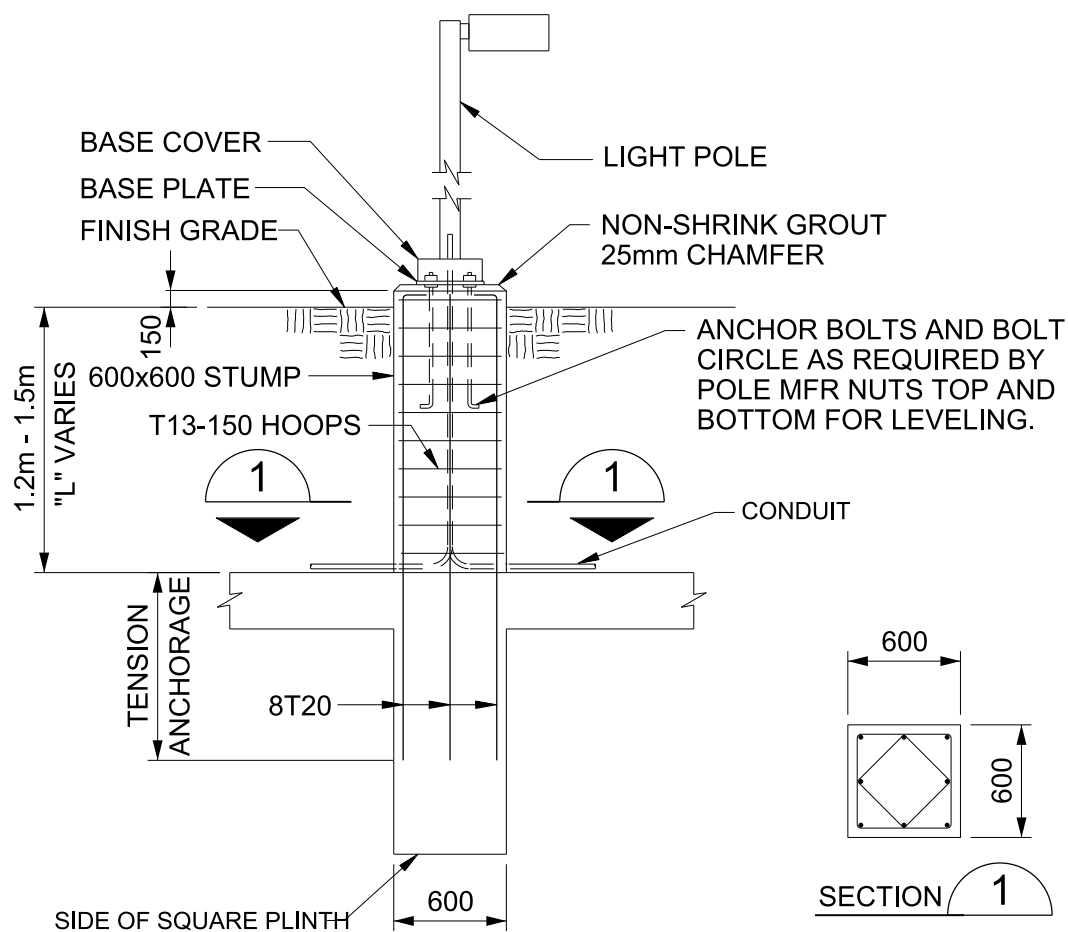

MAX POLE HEIGHT	SIZE	"L"	VERTICALS
10 m	600 x 600	AS SHOWN	8T20

NOTES:

1. USE STAINLESS STEEL NUTS AND LOCKWASHERS.
2. INSTALL TWO CONDUIT ENTRY (MINIMUM) PER POLE.
3. CONDUITS SHALL BE STUBBED UP TO 150mm OF THE POLE HANDHOLE
4. CO-ORDINATE WITH SITE PLANS FOR PROPER ORIENTATION OF LIGHTS MOUNTED ON POLE.
5. PROVIDE TRANSFER BEAM WHEN THE STUMP IS NOT LOCATED ABOVE A STRUCTURAL BEAM.
6. ALL DIMENSIONS IN MILLIMETERS

AREA LIGHT POLE FOUNDATION

NTS

STANDARD DETAIL

16208B

JACOBS