


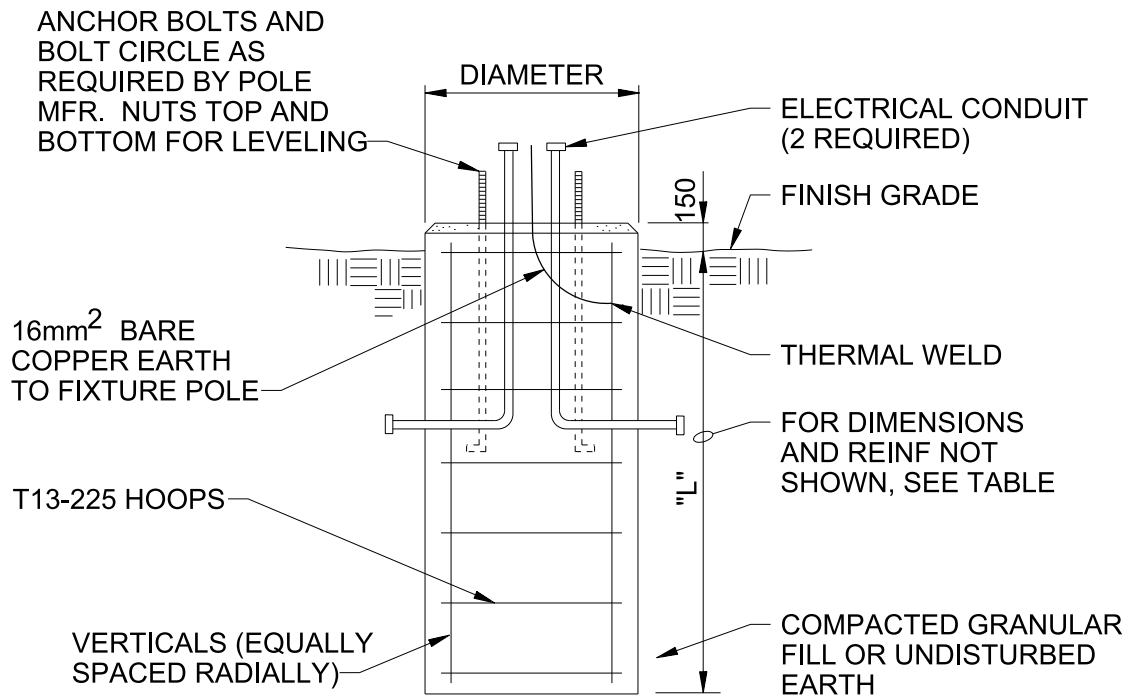

MAX POLE HEIGHT	DIAMETER	"L"	VERTICALS
7.5m	600mm	1.8m	6T16
12m	600mm	2.4m	6T20
18m	750mm	3.3m	8T25

NOTES:

1. USE STAINLESS STEEL NUTS AND LOCKWASHERS.
2. INSTALL TWO CONDUITS (MINIMUM) PER POLE.
3. INSTALL CENTERLINE OF POLE 900mm BEHIND THE FACE OF THE CURB.
4. CONDUITS SHALL BE STUBBED UP TO WITHIN 150mm OF THE POLE HANDHOLE.
5. COORDINATE WITH SITE PLANS FOR PROPER ORIENTATION OF POLE.

AREA LIGHT POLE FOUNDATION

NTS

STANDARD DETAIL

16218

JACOBS