


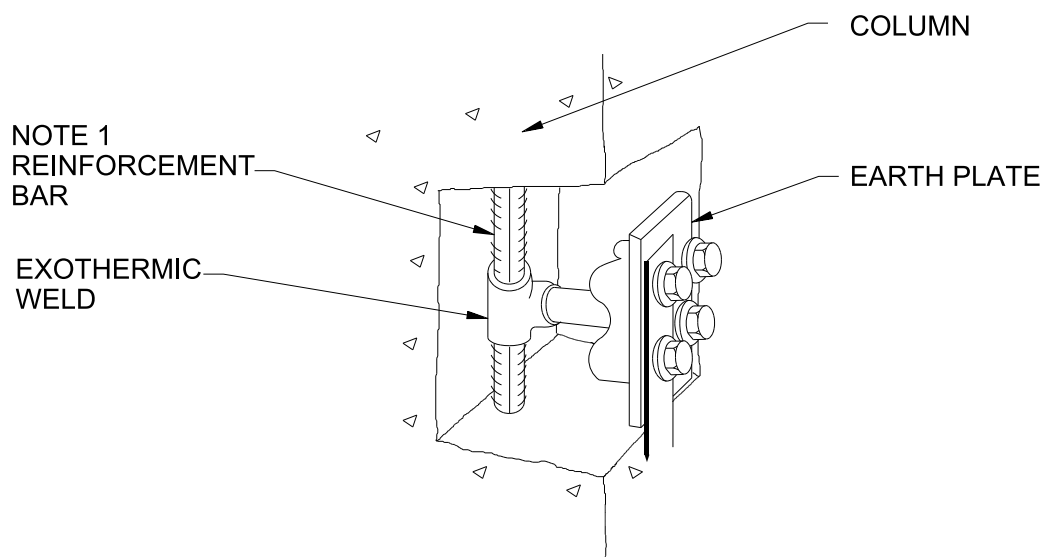

NOTE:

1. PROVIDE CONTINUOUSLY WELDED REBAR (T25 MINIMUM) CONNECTION FROM EARTH PLATE TO PILE STARTER BAR.
2. ALL WELDS TO BE VISUALLY INSPECTED AND TESTED WITH MAGNETIC PARTICLE.
3. MINIMUM WELD THROAT THICKNESS SHALL BE 10mm.
4. PROVIDE ADDITIONAL REBAR/STEEL CONNECTION AS NECESSARY TO PROVIDE ELECTRICALLY CONTINUOUS CONNECTION TO PILE STARTER BAR.

EARTH CONNECTION TO REINFORCEMENT BAR

NTS

STANDARD DETAIL

16459B

JACOBS