



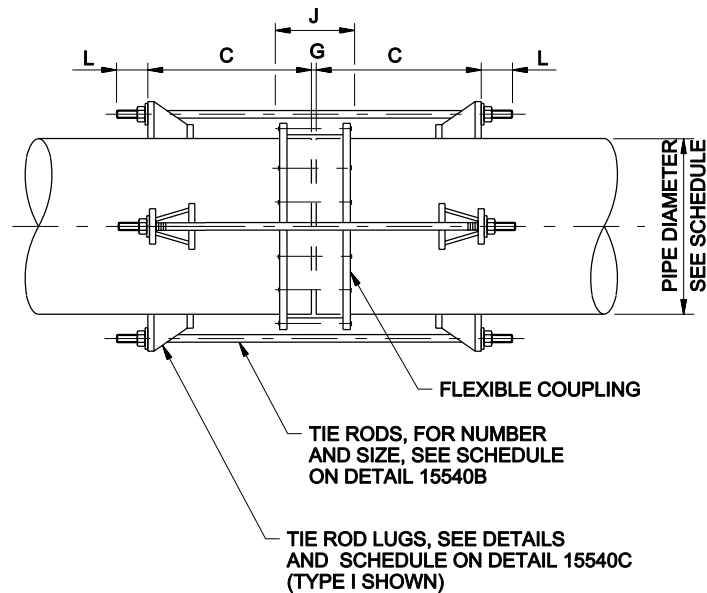

NOTES:

1. ALL DIMENSIONS IN MILLIMETERS, UNLESS OTHERWISE NOTED.
2. THE MIDDLE RING LENGTH OF THE FLEXIBLE COUPLING SHALL BE AS SPECIFIED.
3. THE CONTRACTOR SHALL DETERMINE THE LENGTH "J" (COUPLING BOLT LENGTH) FROM MANUFACTURER'S CATALOGS USING THE SPECIFIED MIDDLE RING LENGTH.
4. "G" = MANUFACTURER'S RECOMMENDED SPACE BETWEEN ENDS OF PIPE.
5. "C" = $J+Z+25\text{mm}$, (ROUND THIS VALUE UP TO NEXT EVEN INCH), MINIMUM. (FOR Z DIMENSIONS, SEE LUG SCHEDULE.)
6. TIE ROD LENGTH = $2L+2C+G$.

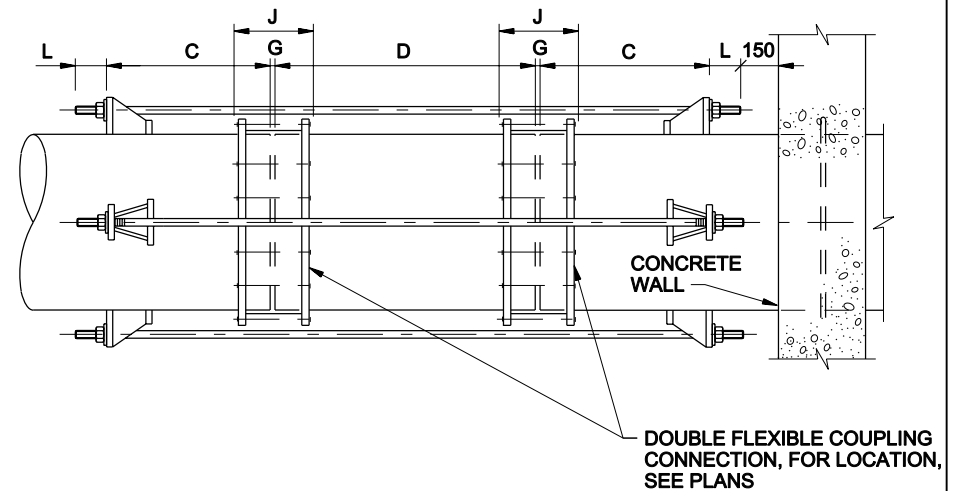

NOTES:

1. ALL DIMENSIONS IN MILLIMETERS, UNLESS OTHERWISE NOTED.
2. THE MIDDLE RING LENGTH OF THE FLEXIBLE COUPLING SHALL BE AS SPECIFIED.
3. THE CONTRACTOR SHALL DETERMINE THE LENGTH "J" (COUPLING BOLT LENGTH) FROM MANUFACTURER'S CATALOGS USING THE SPECIFIED MIDDLE RING LENGTH.
4. G = MANUFACTURER'S RECOMMENDED SPACE BETWEEN ENDS OF PIPE.
5. C = $J+Z+25\text{mm}$, (ROUND THIS VALUE UP TO NEXT EVEN INCH), MINIMUM. (FOR Z DIMENSIONS, SEE LUG SCHEDULE.)
6. D = $2C+150\text{mm}$
7. TIE ROD LENGTH = $2L+2C+2G+D$.
8. SIMILAR, TO TYPICAL THRUST TIE DETAIL EXCEPT AS NOTED.

SPECIAL THRUST TIE FOR STEEL PIPE - ASSEMBLIES

NTS

STANDARD DETAIL

SHT 1 OF 3

15540A

JACOBS