


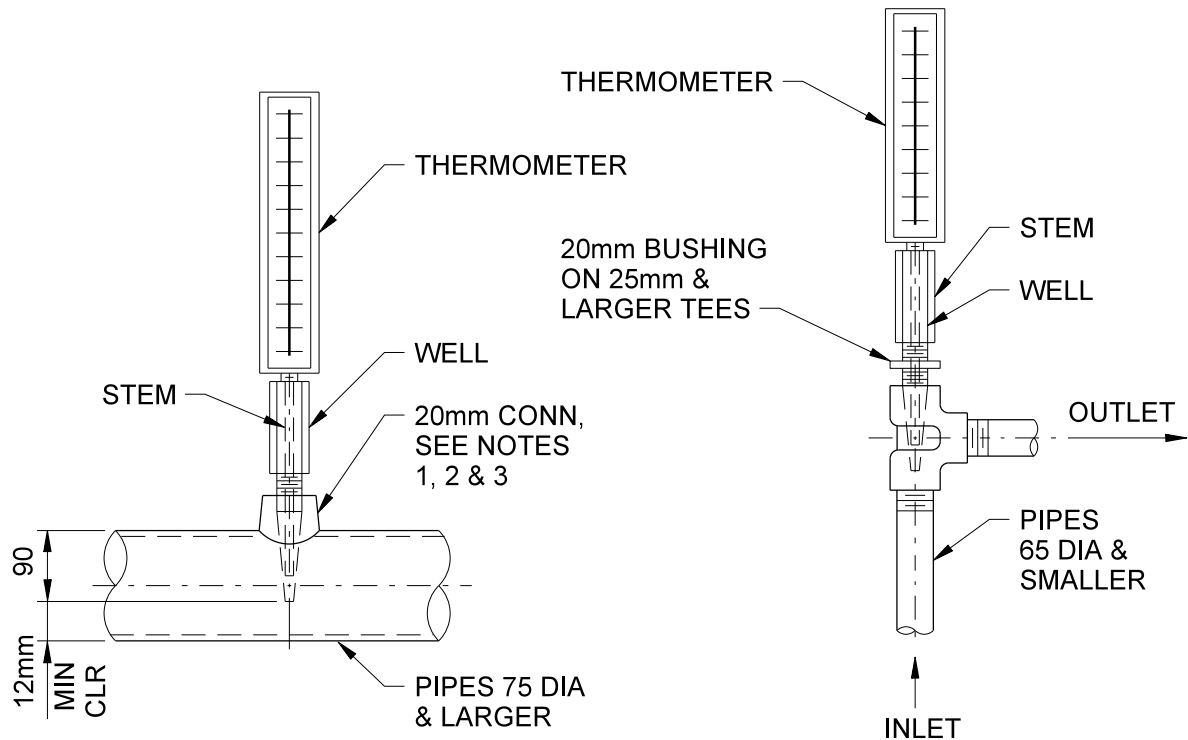

NOTES:

1. ALL DIMENSIONS IN MILLIMETERS, UNLESS OTHERWISE NOTED.
2. FOR STEEL, GALVANISED STEEL AND PVC 65mm AND SMALLER, USE A 20mm BUSHING IN TEE.
3. FOR DUCTILE IRON AND FIBERGLASS REINFORCED PLASTIC PIPE, ALL SIZES, USE A 20 mm OUTLET PIPE SADDLE.
4. FOR STEEL AND STAINLESS STEEL PIPES 80mm AND LARGER, AND PRESSURE VESSELS, USE 20mm THRED-O-LETS AS SHOWN.

THERMOMETER MOUNTING

NTS

STANDARD DETAIL

15691

JACOBS