


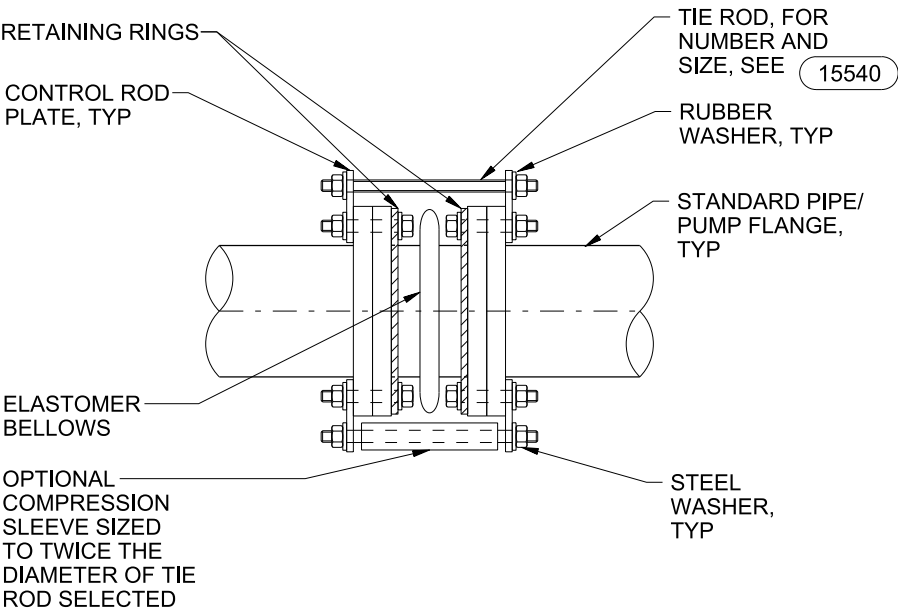

Maximum Surge or Test Pressure of the System (Test Pressure is defined as 1.5 times the maximum working pressure)							
Size (mm)	Gusset Plate Thickness (mm)	Rod Diamter (mm)	Pressure (bar)				
			Number of Rods				
			2	3	8	8	8
25	10	16	65	-	-	-	-
40	10	16	35	-	-	-	-
50	10	16	45	-	-	-	-
65	10	16	36	-	-	-	-
80	10	16	30	-	-	-	-
100	10	16	21	32	42	-	-
125	12.7	16	16	24	32	-	-
150	12.7	16	12	19	25	-	-
200	15	20	11	16	22	-	-
250	20	26	11	16	22	33	-
300	20	26	11	16	22	33	-
350	20	26	7	11	15	23	-
400	20	30	7	11	15	23	31
450	20	30	6	9	12	19	25
500	20	30	5	8	10	16	21
600	25.4	32	5	7	10	15	20
750	32	40	4	7	9	14	19
900	40	42	4	7	9	14	19
1050	40	42	3	4	6	9	13
1200	40	42	2	4	5	8	11
1400	50	52	2	4	5	8	11
1500	50	52	2	3	4	7	9
1700	50	52	2	3	4	6	8
1800	50	52	1	2	3	5	6
2000	55	58	1	2	3	5	7
2100	55	58	1	2	3	5	6

ELASTOMER BELLOWS CONNECTOR

NTS

STANDARD DETAIL

15966

