



SAFETY GRATE
FALL THROUGH
PROTECTION

NEOPRENE SPONGE
SHALL BE PROVIDED
FOR AIR TIGHT SEAL

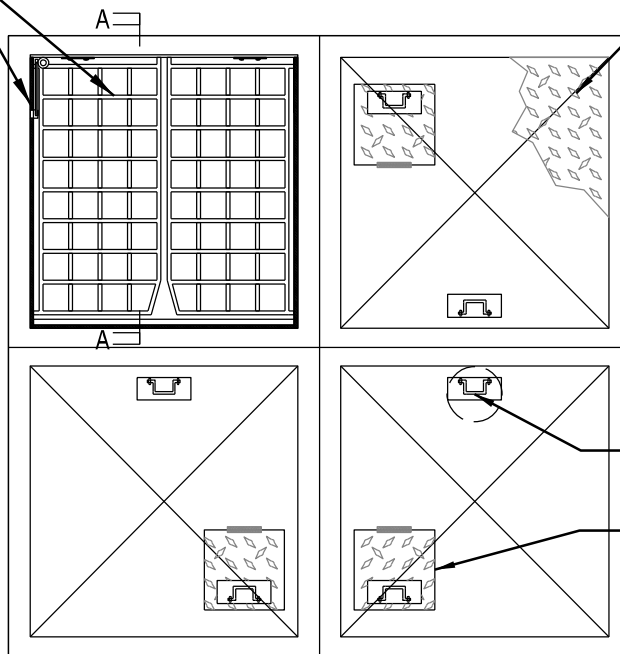

PLAN VIEW

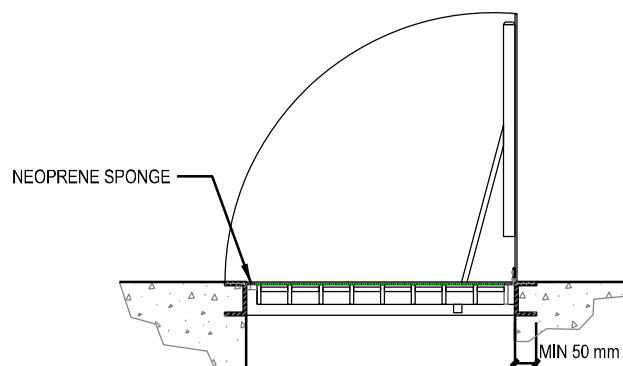

SECTION A-A

ALUMINIUM HATCH

GUIDE BAR

SAFETY GRATE
FALL THROUGH
PROTECTION


NEOPRENE SPONGE

VIEWING ACCESS
HATCH

HEAVY DUTY HINGES

ALUM SWING HANDLE
SEE DETAIL A

VIEWING ACCESS HATCH
NEOPRENE SPONGE
SHALL BE PROVIDED FOR
AIR TIGHT SEAL

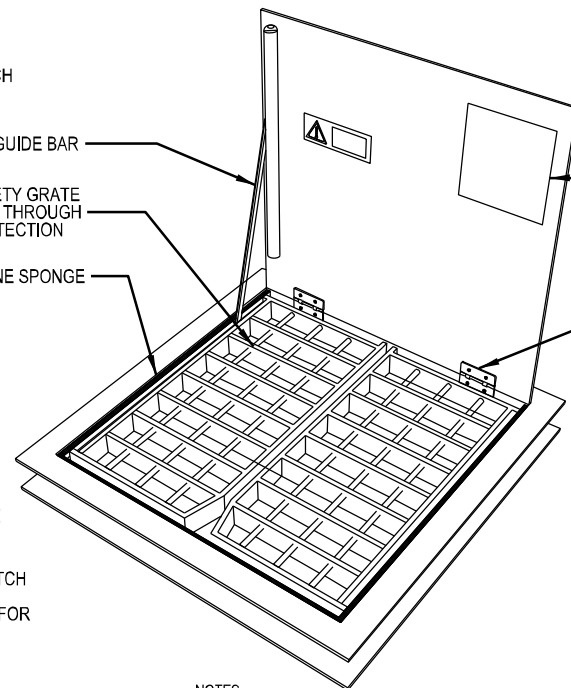

NOTES:

1. ACCESS AND INSPECTION HATCH WITH SAFETY GRATE SHALL BE FULLY FLUSHED WITH FINISHED FLOOR LEVEL AND ITS ASSOCIATED FITTINGS AND FIXTURES SHALL NOT POSE AS A TRIPPING HAZARD.
2. ALL DIMENSIONS ARE IN MILLIMETRES, UNLESS OTHERWISE SPECIFIED.
3. ALL LEVELS ARE IN METRES, UNLESS OTHERWISE STATED.
4. ALUMINIUM COVERS, ANGLE AND BEAMS TO BE ANODISED.
5. ALL ALUMINIUM ANGLE, SUPPORTS SURFACE IN CONTACT WITH CONCRETE TO BE PAINTED WITH ONE COAT OF BLACK BITUMINOUS PAINT.
6. ALL ALUMINIUM MATERIALS SHALL BE ANODISED ALUMINIUM ALLOYS 5052-H36 OR 5086-H34 (FORMED ALUMINIUM SHEET) OR BETTER AND 6061-T6 OR 3003-H16 (EXTRUSIONS) OR BETTER.
7. A MINIMUM OF 2 STAINLESS STEEL HINGES WILL BE WELDED FOR EACH PANEL.
8. COVERS SHALL BE SUFFICIENTLY AIR TIGHT WHEN CLOSED
9. COVERS SHALL BE LOCKABLE WITH PADLOCKS IF REQUIRED.
10. COVERS SHALL BE CLEARLY LABELLED WITH ITS LOAD LIMIT.
11. GAS WARNING LABEL SHALL BE PROVIDED IF REQUIRED.
12. SAFETY GRATE SHALL COME WITH COVERS STAYS AND HANDLES.
13. THE SPECIFICATIONS SHALL PROVIDE THE NOMINAL DIMENSIONS OF THE ACCESS OPENING. THE CONTRACTOR SHALL SELECT A HATCH FROM A STANDARD PRODUCT RANGE TO PROVIDE THE OPENING REQUIRED.
14. THE FRAME OF THE HATCH SHALL REST ON STRUCTURAL STEEL OR CONCRETE. REFER TO MANUFACTURERS DRAWINGS FOR FINAL CONNECTION / EMBEDMENT DETAILS.

DETAIL A

ALUMINIUM ACCESS AND INSPECTION HATCH WITH SAFETY GRATE

NTS

STANDARD DETAIL

15967A

JACOBS