


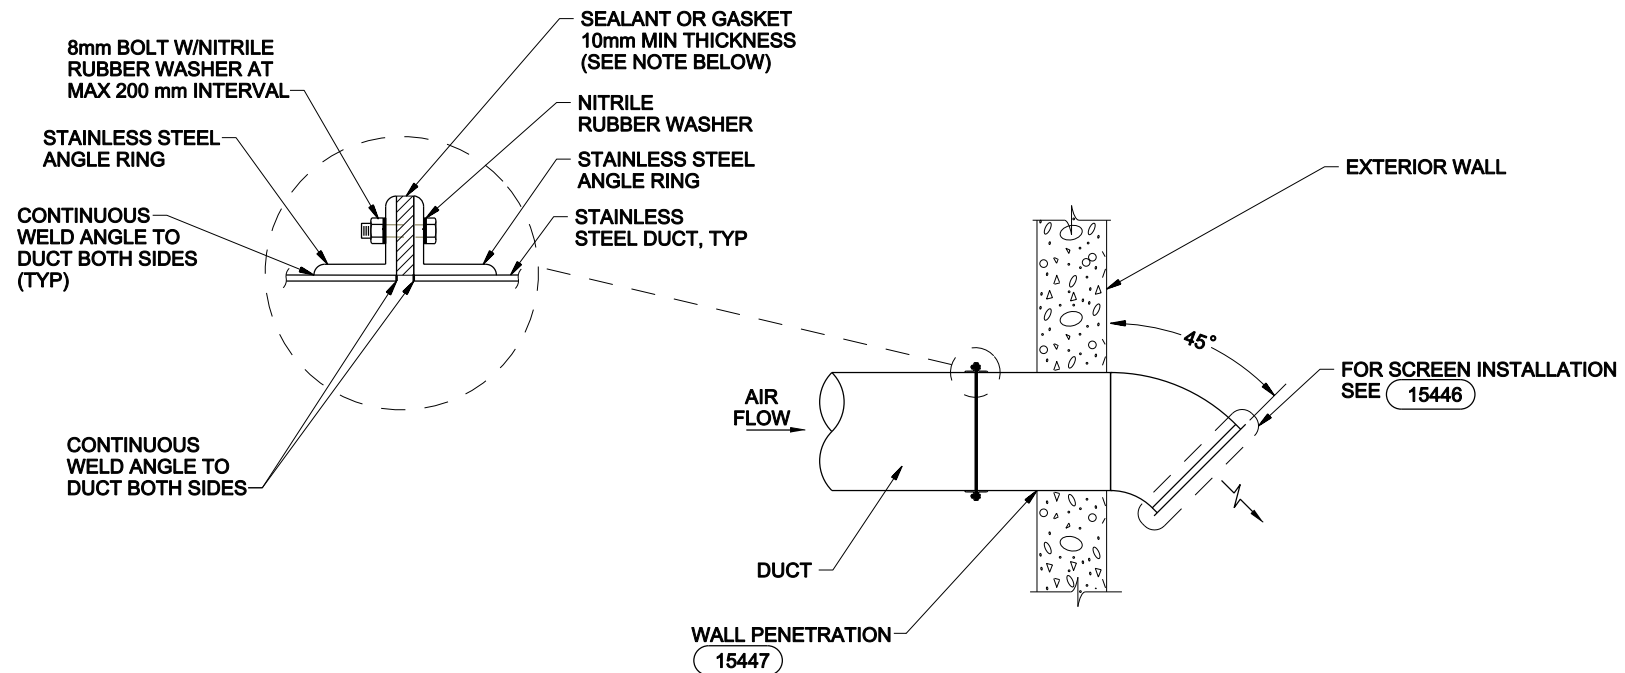

NOTES:

1. ALL DIMENSIONS IN MILLIMETERS, UNLESS OTHERWISE NOTED.
2. GASKETED MATERIAL: HIGH STRENGTH ARAMID FIBERS (NON-ASBESTOS), NITRILE RUBBER BONDED WITH HIGH HEAT RESISTANCE.
3. SEALANT MATERIAL: 100% POLYTETRAFLUOROETHYLENE FIBRILLATED, WITH OR WITHOUT INTEGRAL PRESSURE SENSITIVE ADHESIVE STRIP.

PURGE EXHAUST DUCT DISCHARGE

NTS

STANDARD DETAIL

C15443

JACOBS