




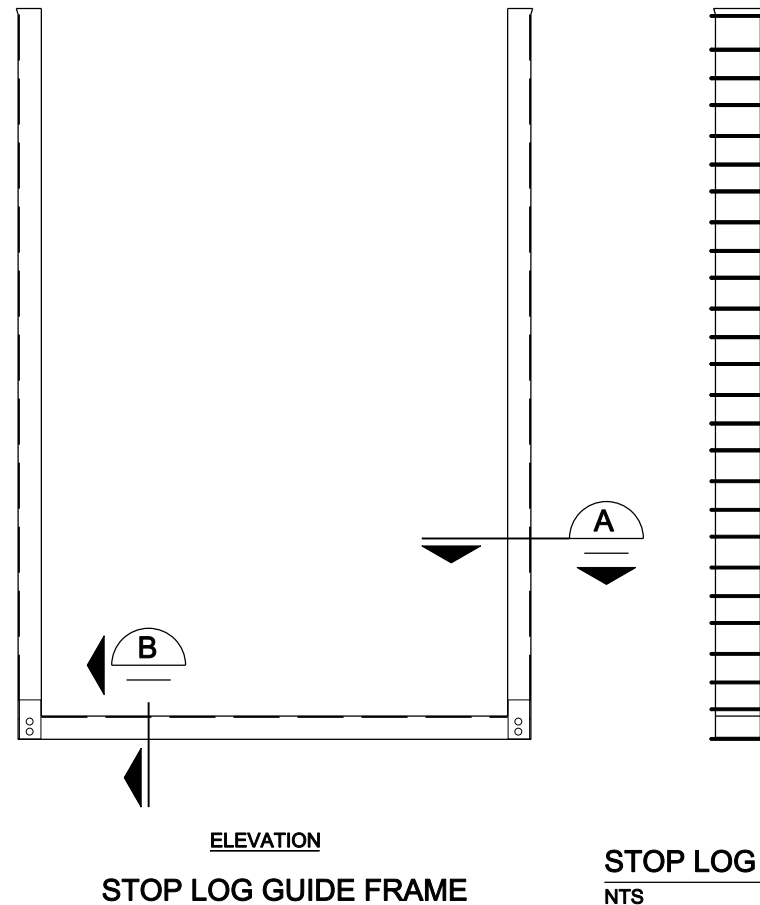

SECTION C

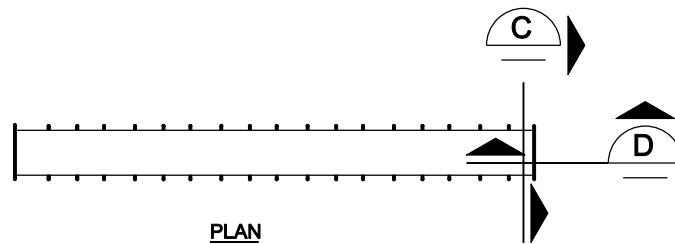

SECTION D





SECTION A



SECTION B



STOP LOG AND GUIDE FRAME
NTS

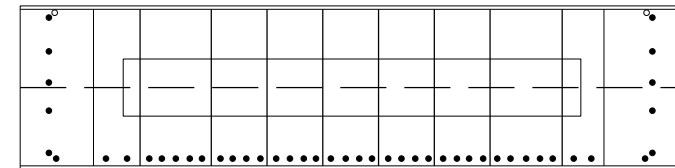

NOTES:

1. ALL DIMENSIONS IN MILLIMETERS, UNLESS OTHERWISE NOTED.
2. REFER TO MODEL AND DRAWINGS FOR INSTALLATION LOCATION OF GUIDE FRAMES AND STOP LOG STORAGE BINS. NOTE SPECIFIC LOCATION AND ARRANGEMENT OF LOG STORAGE. STORAGE BIN MUST BE DESIGNED TO ACCOMMODATE STORAGE AS SHOWN IN THE MODEL. BIN SHALL BE DESIGNED TO ALLOW LOGS TO BE STORED WITH NO CONTACT ON LOG SEAL.
3. PROVIDE A LIFTING DEVICE FOR INSTALLATION AND REMOVAL OF LOGS FROM GUIDE FRAMES AND STORAGE BINS. LIFTING DEVICE WITH LOG SHALL NOT EXCEED A TOTAL HEIGHT OF 3.3 METERS. THIS HEIGHT IS TO BE MEASURED FROM THE HOOK CONNECTION FOR THE BRIDGE CRANE HOIST TO THE BOTTOM OF THE STOP LOG.

15705A

JACOBS