


Supplement | Gaussian held-out-combination performance

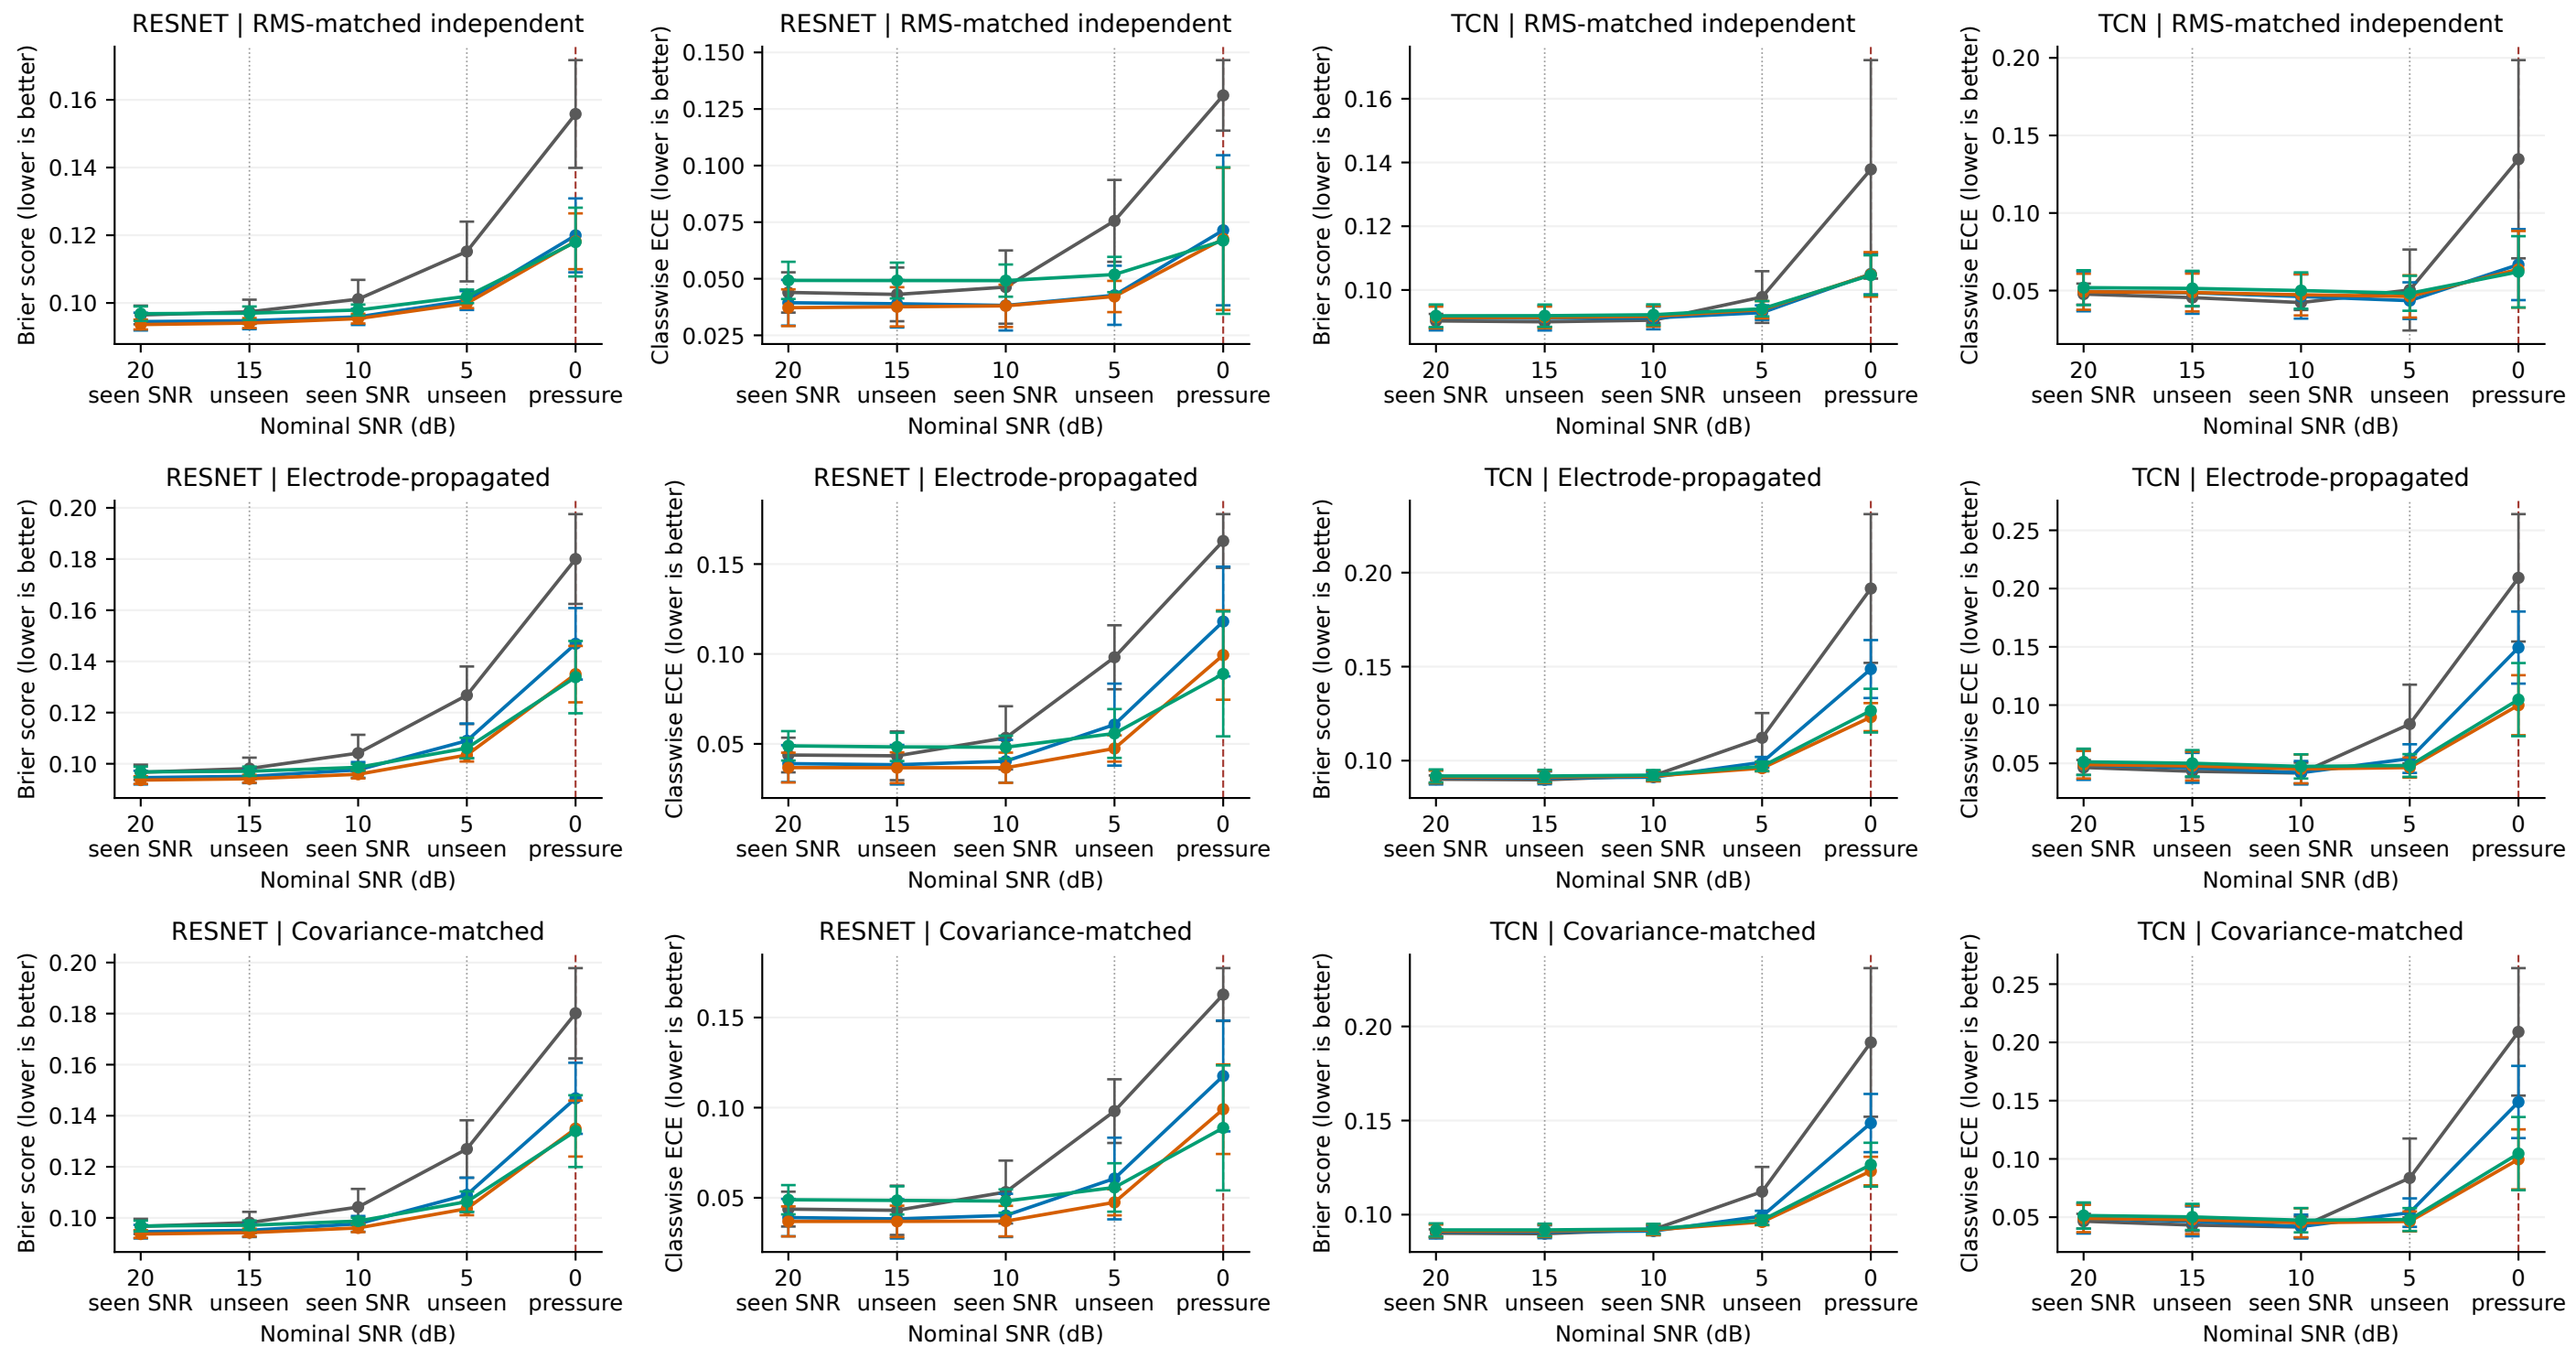

Secondary metrics for held-out combinations, faceted by architecture and perturbation structure. Mean +/- 1 sample SD across 5 training seeds (not a CI). 15/5 dB are unseen and 0 dB is pressure. F1 uses fixed clean-validation thresholds. Complete training/all-electrode secondary curves and all drop values remain in the saved CSVs; they are not omitted from analysis.

—●— Clean only —●— Independent RMS augmentation —●— Electrode augmentation —●— Mixed augmentation