


Gaussian robustness | Noisy / clean macro AUROC

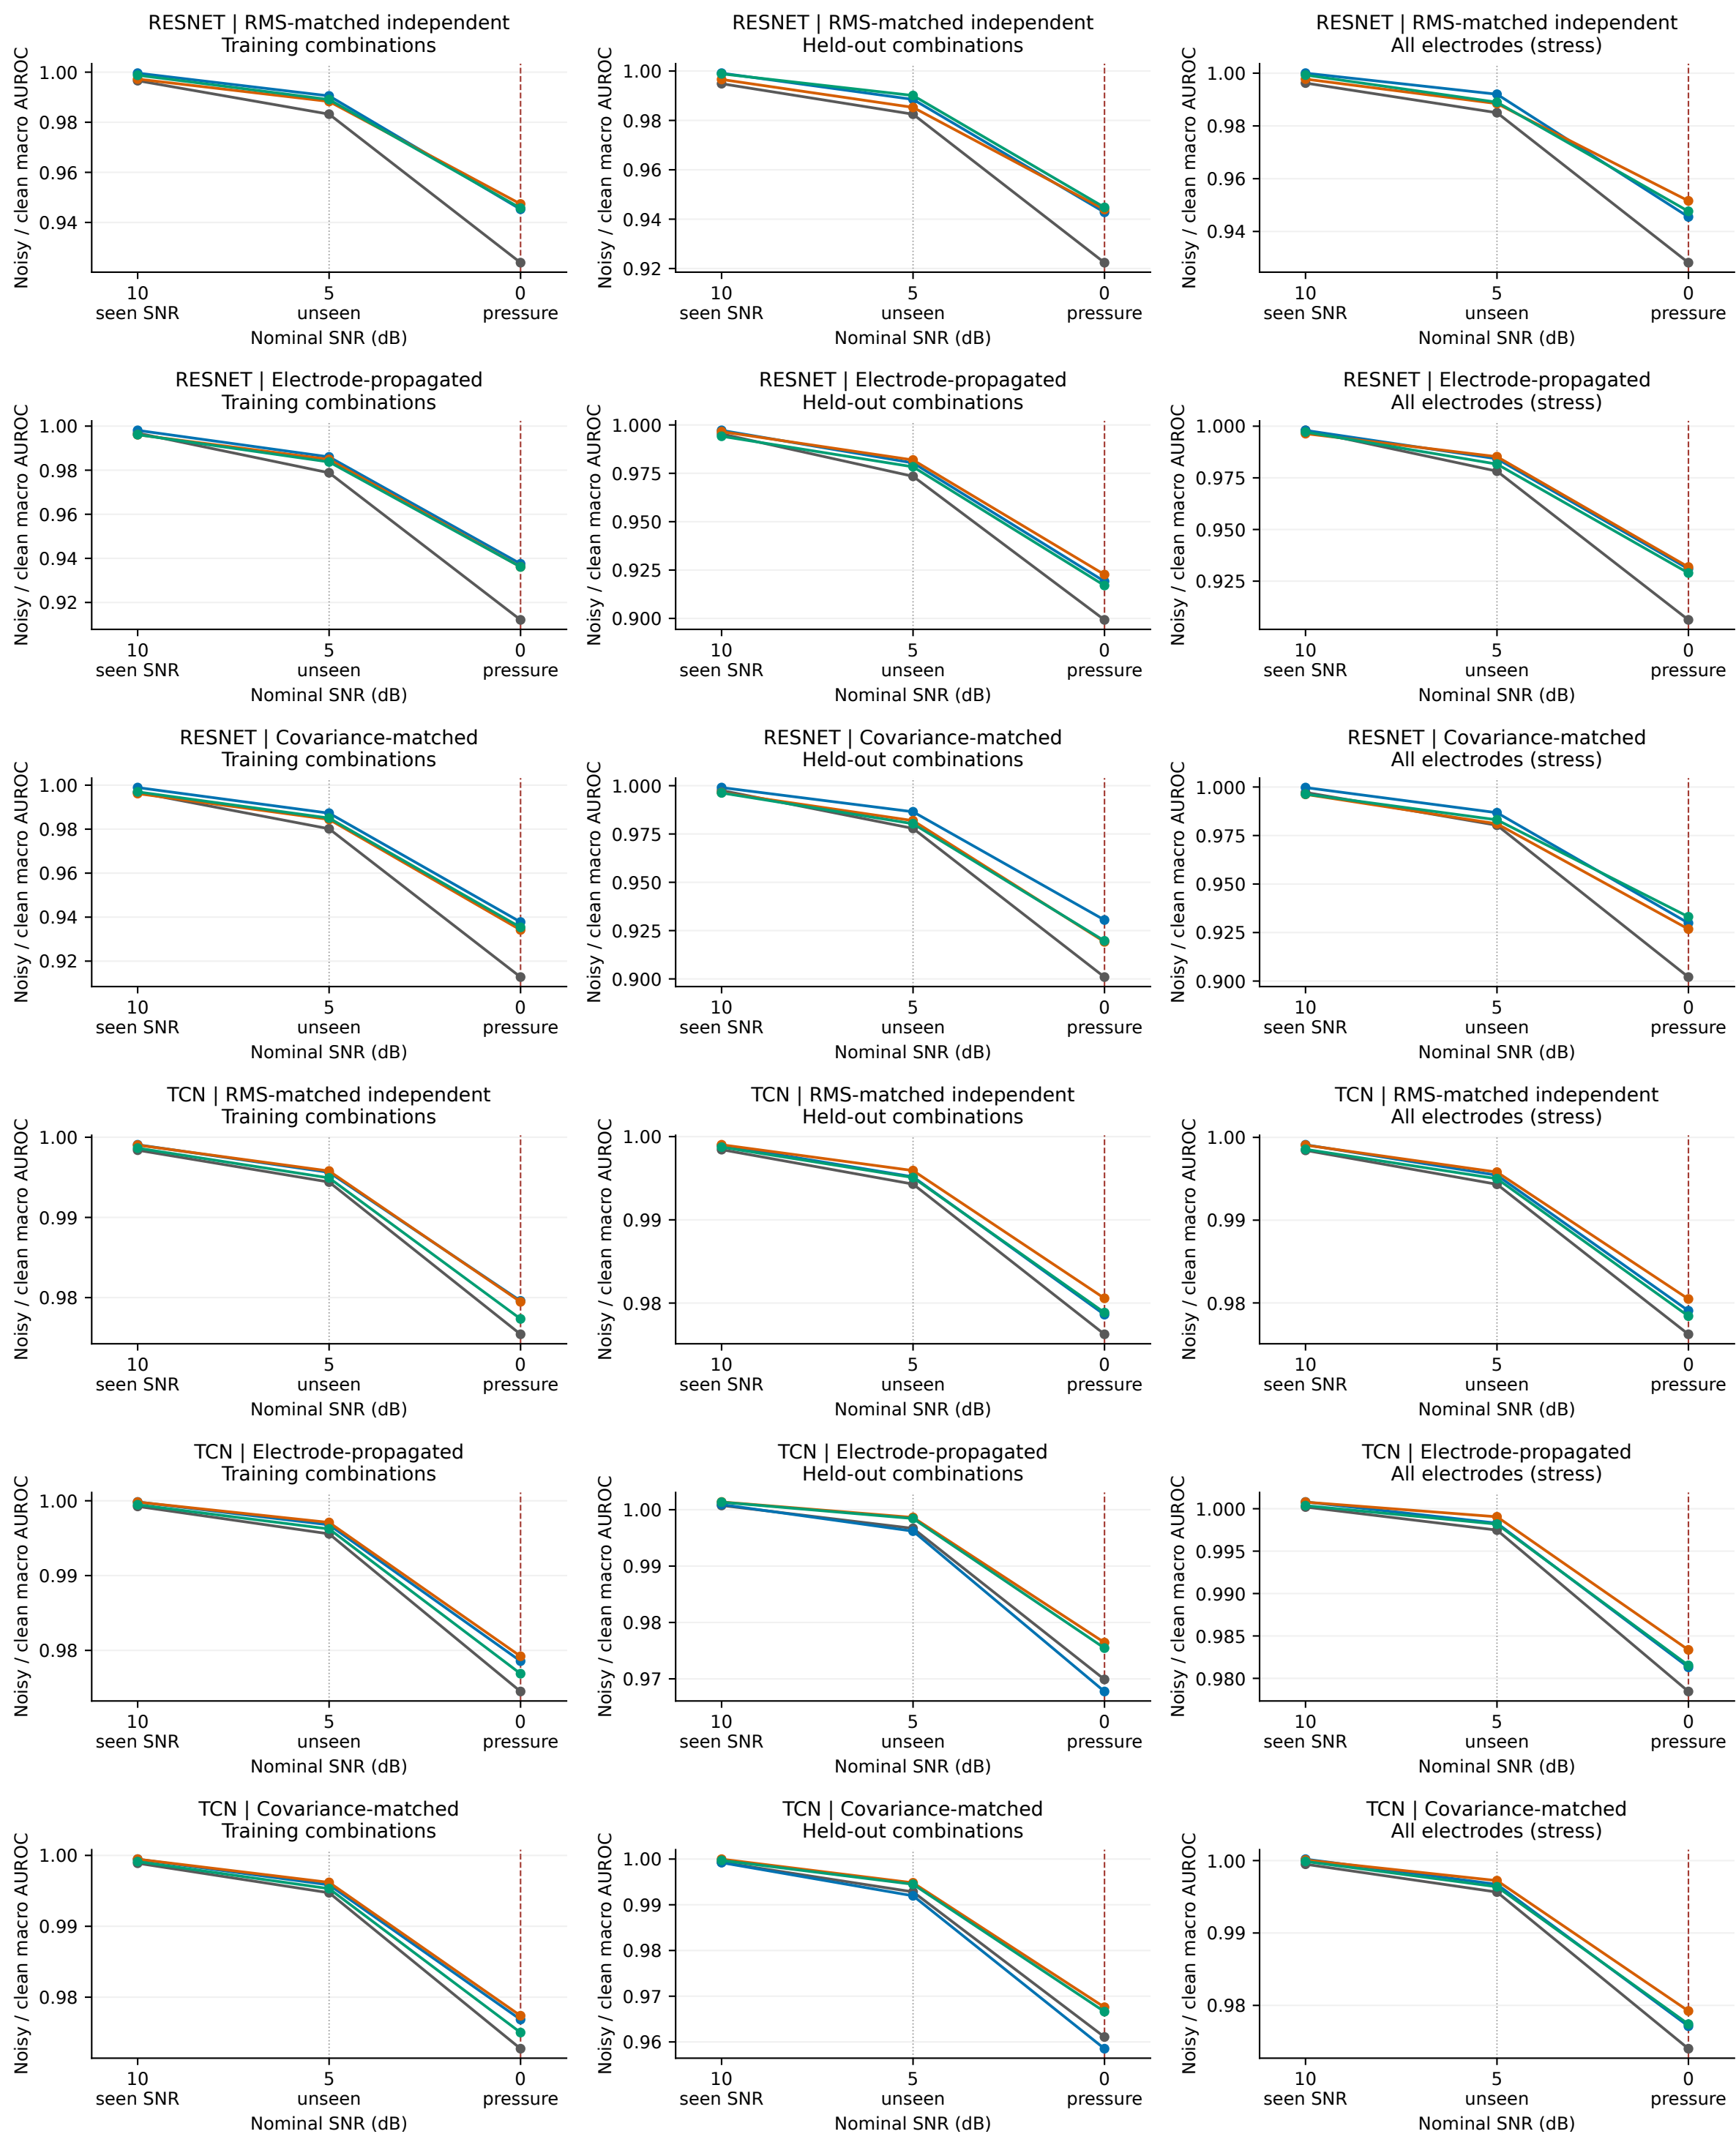

TECHNICAL PILOT; not confirmatory. Equal-case condition metrics, then equal training-seed means. One training seed: points only; training SD and t intervals are not estimable. Rows cover both architectures and all three perturbation structures; columns separate training, held-out, and all-electrode combinations. 15/5 dB were unseen in training; 0 dB is pressure. Seen SNR does not imply a combination or perturbation structure was seen; clean-only has no noisy training exposure.

— Clean only — Independent RMS augmentation — Electrode augmentation — Mixed augmentation