

# Chip-Bridge Technologies

## CB SOIC-TDFN-8-A



Host: 8-SOIC 5.275x5.275mm — Guest: 8-TDFN 3x2mm

### Adapter Interfaces

Table 1: Adapter Parameters

Parameter	Host	Guest	Unit
Package	SOIC	TDFN	-
Pin Count	8	8	-
Package Dim.	5.275x5.275	3x2	mm
Pitch	1.27	0.5	mm

### Features

- Drop-in adapter; Install 8-TDFN 3x2mm on a 8-SOIC 5.275x5.275mm footprint
- Low profile adapter, 0.8mm
- Supports common manufacturing methods
- 1:1 Pinout Configuration

### General Description

This device is a drop-in footprint to footprint adapter for your existing PBC design. Each Chip-Bridge Technologies adapter is designed to fit on the stated **Host Footprint**, and provide a **Guest Footprint** with electrical connections for your replacement IC.

Visit [chipbridgetech.com/products](https://chipbridgetech.com/products) to find our full product catalog. If you have questions or would like to request a design specific to your application, please contact our support team at [support@chipbridgetech.com](mailto:support@chipbridgetech.com).

**Chip-Bridge Technologies** Adapters are a patent pending design.





Figure 1: Adapter Pinout

Host Pins	Guest Pins
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8

Table 2: Pin Configuration

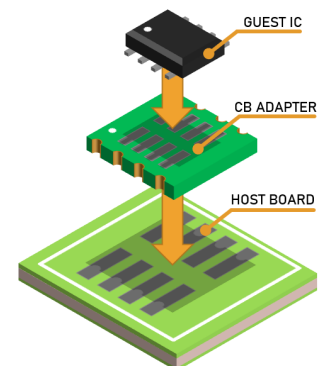

Mechanical Specifications

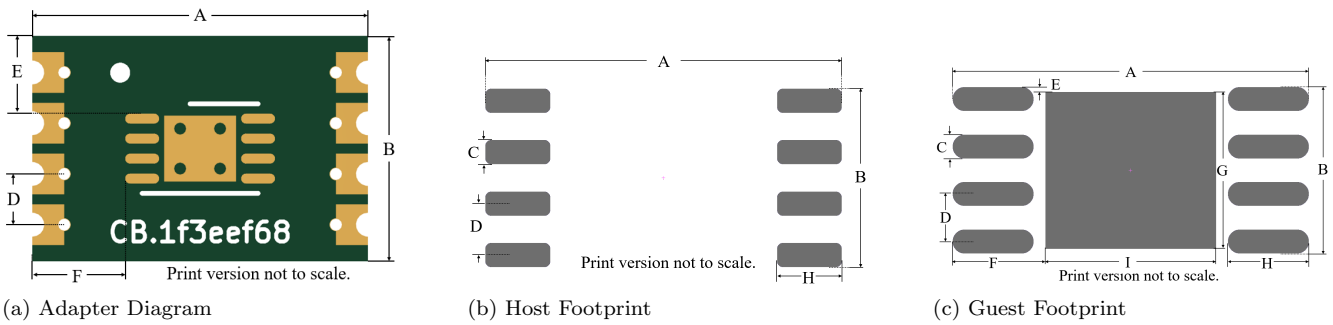


Figure 2: Mechanical Outline

Print version not to scale.

Table 3: Mechanical Specification

	Units	A	B	C	D	E	F	G	H	I
Adapter <sup>1</sup>	mm	5.64 ± 0.127	8.4 ± 0.127	-	1.27	1.96	2.32	-	-	-
Host Footprint <sup>1,2</sup>	mm	8.80	4.41	0.60	1.27	-	-	-	1.60	-
Guest Footprint <sup>1,3</sup>	mm	3.75	1.75	0.25	0.5	-	-	1.65	0.85	0.3

<sup>1</sup> Tolerances ±0.1mm unless otherwise stated.  
<sup>2</sup> Host IC Reference Drawing: [microchip.com/downloads/en/DeviceDoc/20005045C.pdf#page=23](https://microchip.com/downloads/en/DeviceDoc/20005045C.pdf#page=23)  
<sup>3</sup> Guest IC Reference Drawing: [microchip.com/downloads/en/DeviceDoc/8L\\_TDFN\\_2x3\\_MN\\_C04-0129E-MN.pdf](https://microchip.com/downloads/en/DeviceDoc/8L_TDFN_2x3_MN_C04-0129E-MN.pdf)

Trace Specifications

Table 4: Adapter Trace Specifications

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Trace Resistance	$R_{trace}^4$	0.1	2.7	15.0	mΩ	20°C
Trace to Trace Clearance	$d_{clearance}$	250 ± 13			μm	

<sup>4</sup> Calculated values.

Part Identifier

Printed Identifier: 1f3eef68

Datasheet Updates

You can find the latest datasheet at [chipbridgetech.com/products](https://chipbridgetech.com/products).