




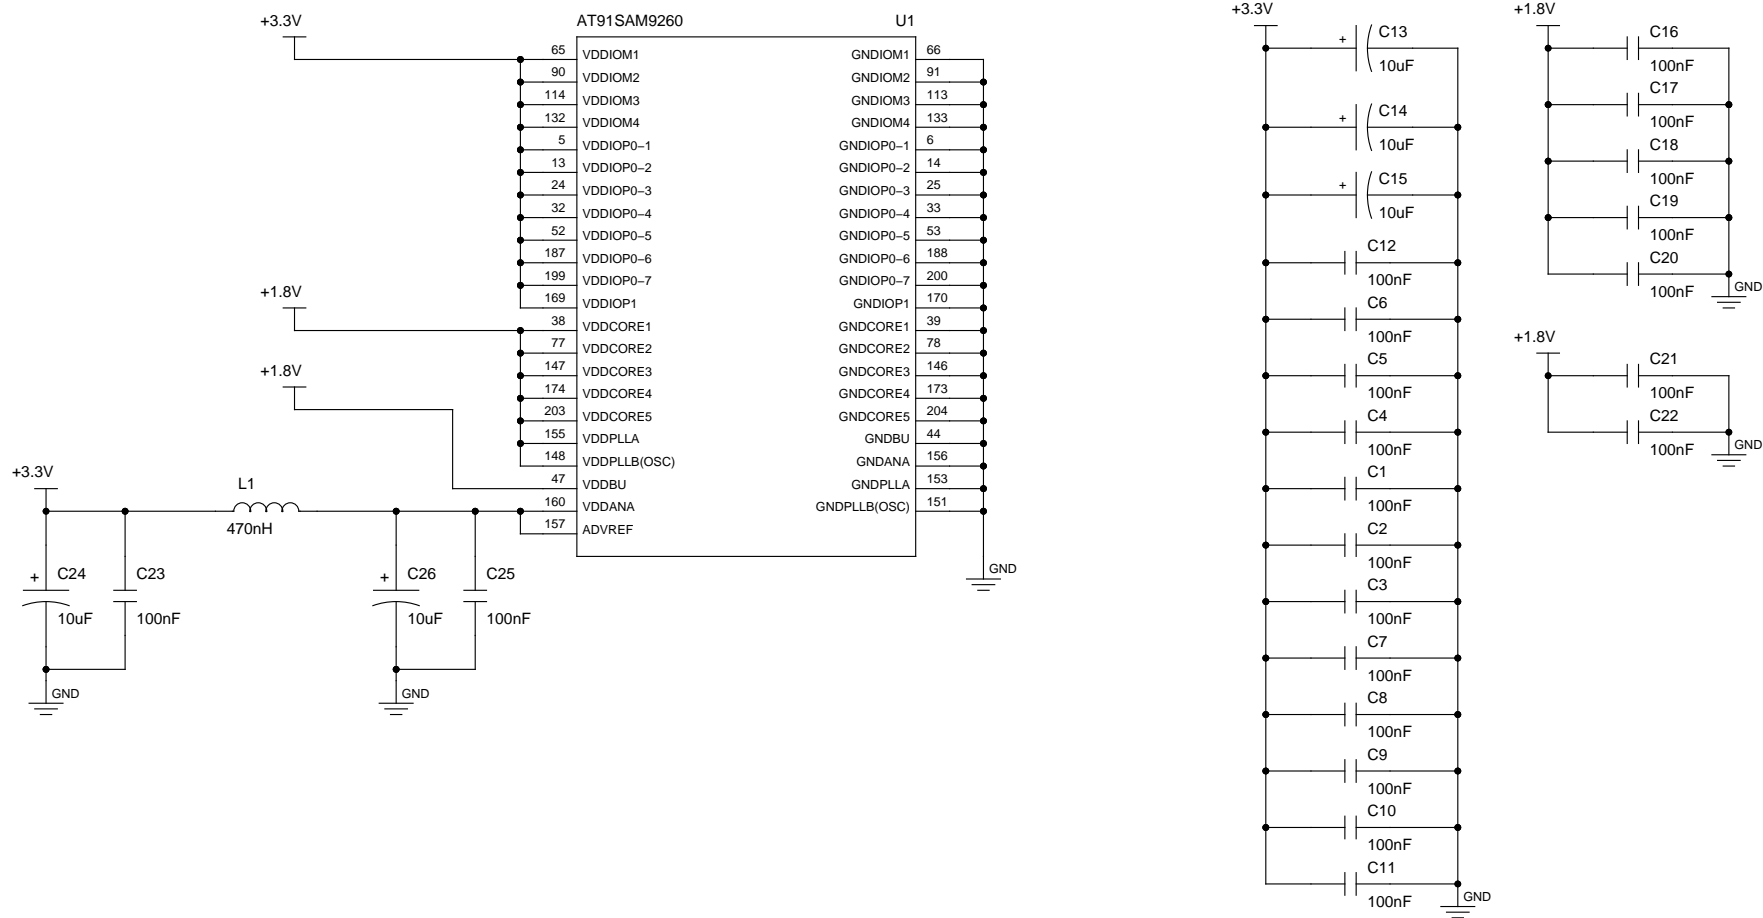

AT91SAM9260 based Telephone ATA Design (GPL v3)		
FILE:		REVISION:
PAGE	OF	DRAWN BY: Saritha Kalyanam

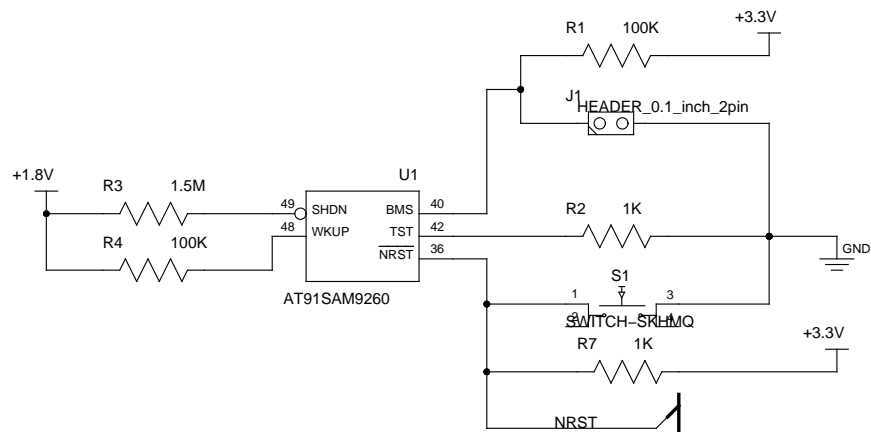


Power		
GPLv3		
TITLE		
FILE:		REVISION:
PAGE	OF	Saritha Kalyanam
		DRAWN BY:

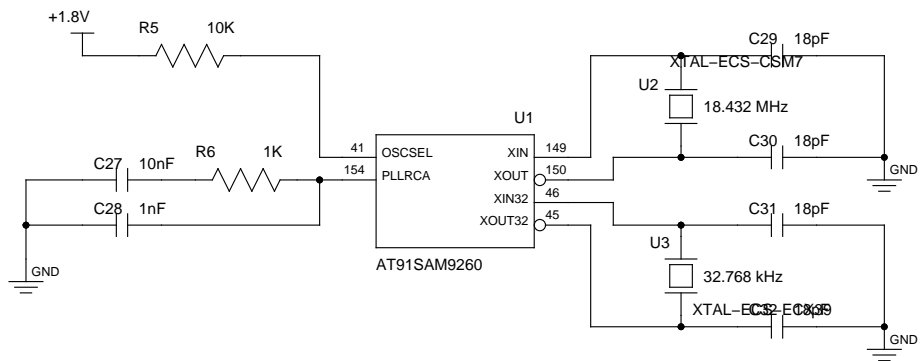

Note:

REMAP=0, BMS=1 to boot using AT91SAM9260's internal ROM boot program.  
 OSCSEL=1, external slow clock (32.768 KHz)


Clock and JTAG/ICE	
GPLv3	
TITLE	
FILE:	REVISION:
PAGE	DRAWN BY: Saritha Kalyanam

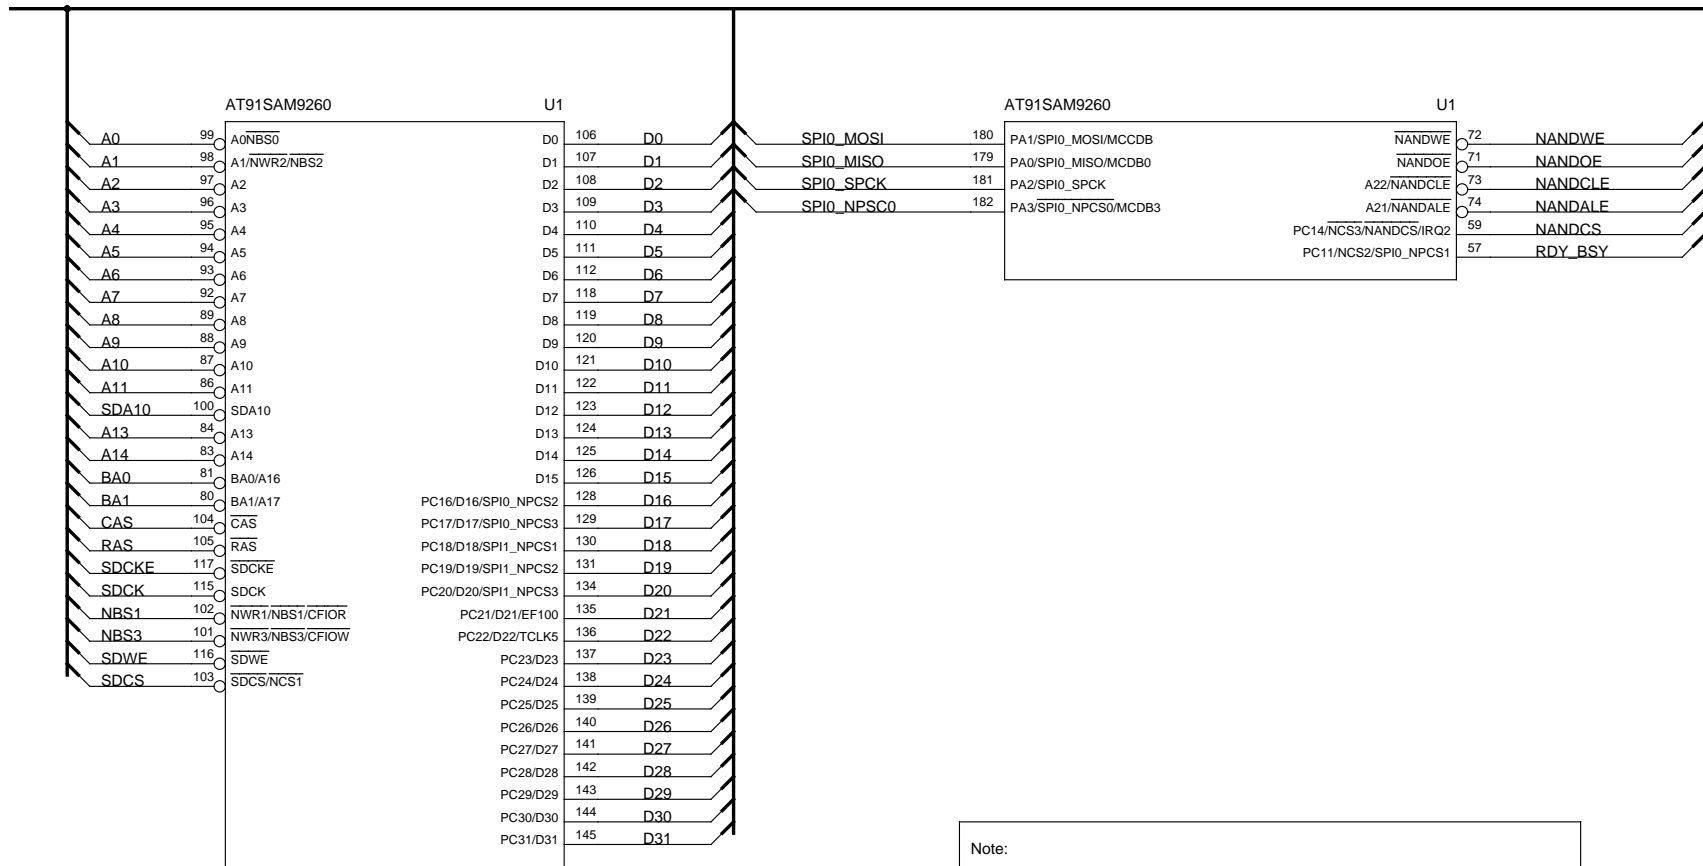

Note:

PIO\_C11 is used for RDY\_BSY interrupt from the NAND flash.

SDRAM & Serial SPI Data flash & NAND flash			
GPLv3			
TITLE			
FILE:			REVISION:
PAGE	OF	DRAWN BY:	Saritha Kalyanam

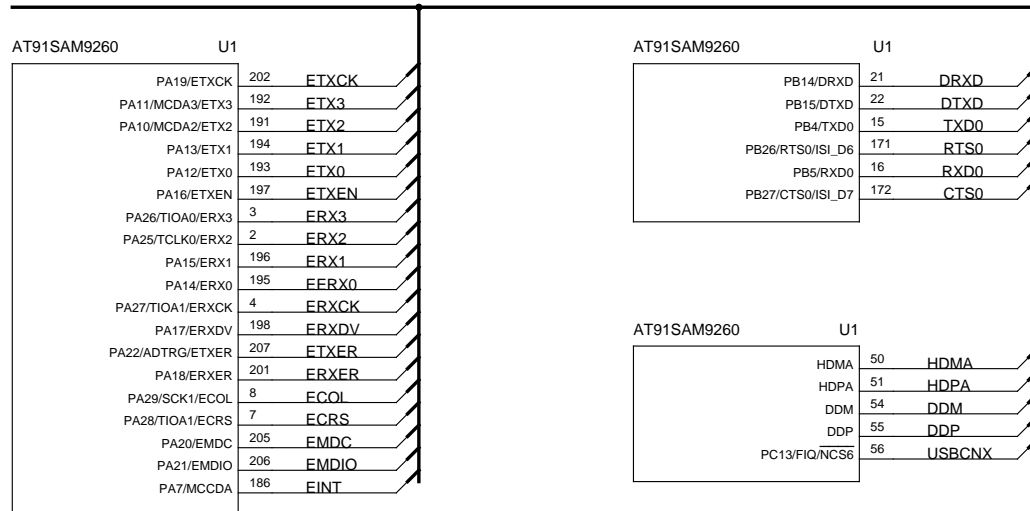

Note:

PIO\_A7 is used for PHY interrupt.

PIO\_C13 is used for 5V detection when plugged into a USB host port.

Ethernet 10/100 & DBGU/Serial & USB Host/Device	
TITLE GPLv3	
FILE:	REVISION:
PAGE	DRAWN BY: Saritha Kalyanam




Note:

Clock: TK0 and RK0 are connected together, with RK0 configured as an input.  
FSYNC: TF0 and RF0 are connected together, with RF0 configured as an input.

SSC interface (for FXS Si321x)			
GPLv3			
TITLE			
FILE:			REVISION:
PAGE	OF		DRAWN BY: Saritha Kalyanam

AT91SAM9260

U1

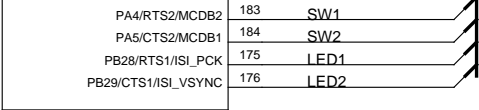


TITLE		User Interface (LEDs and Interrupts)	
FILE:		REVISION:	
PAGE		DRAWN BY:	
OF		Saritha Kalyanam	
		GPLv3	




Unconnected pins	
GPLv3	
TITLE	
FILE:	REVISION:
PAGE	DRAWN BY: Saritha Kalyanam
OF	




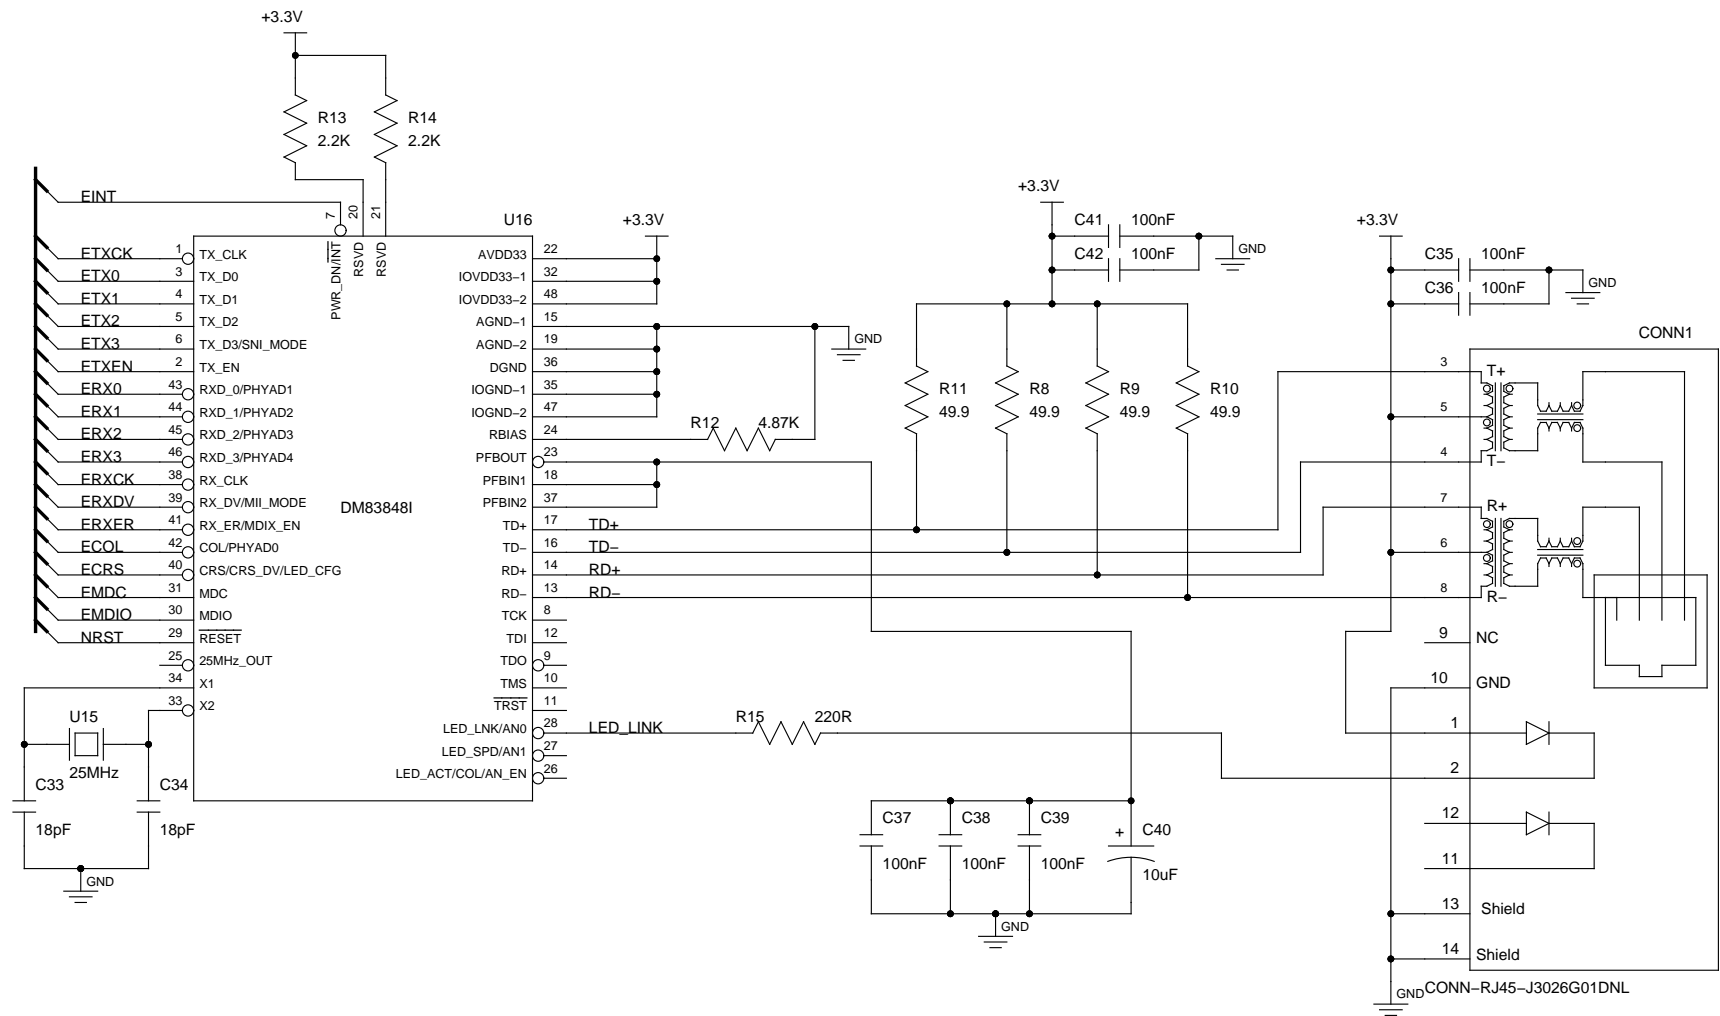


Ethernet 10/100		
GPLv3		
TITLE		
FILE:		REVISION:
PAGE	OF	DRAWN BY: Saritha Kalyanam

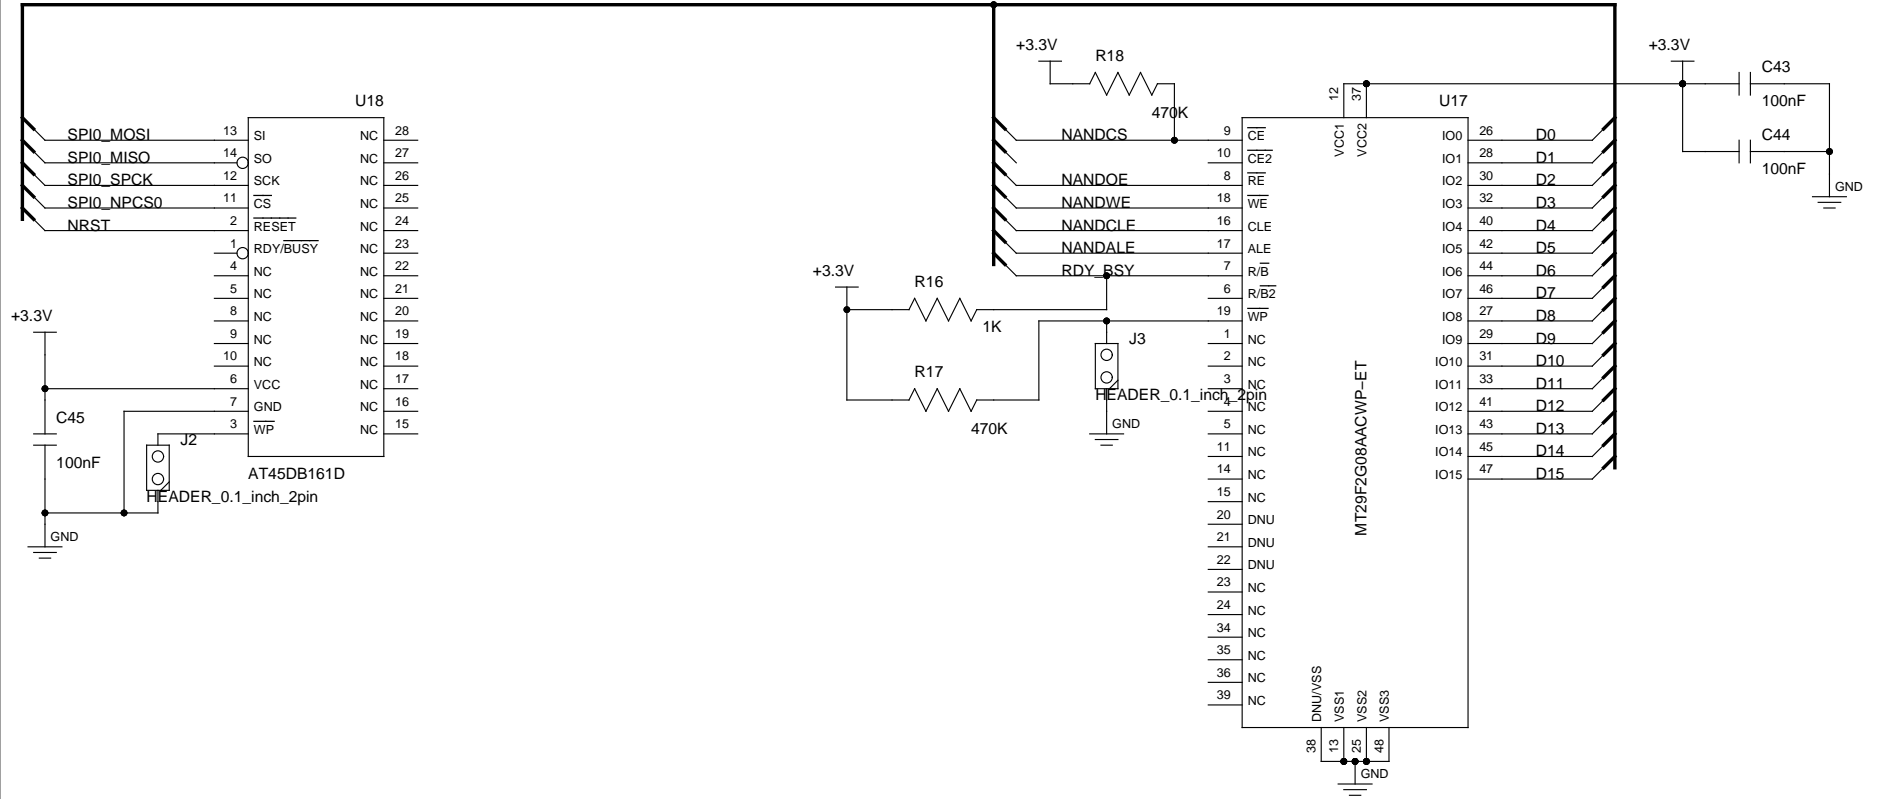


SPI Dataflash (128KB) and NAND Flash (32MB)		
GPLv3		
TITLE		
FILE:		
PAGE	OF	REVISION:
		DRAWN BY: Saritha Kalyanam

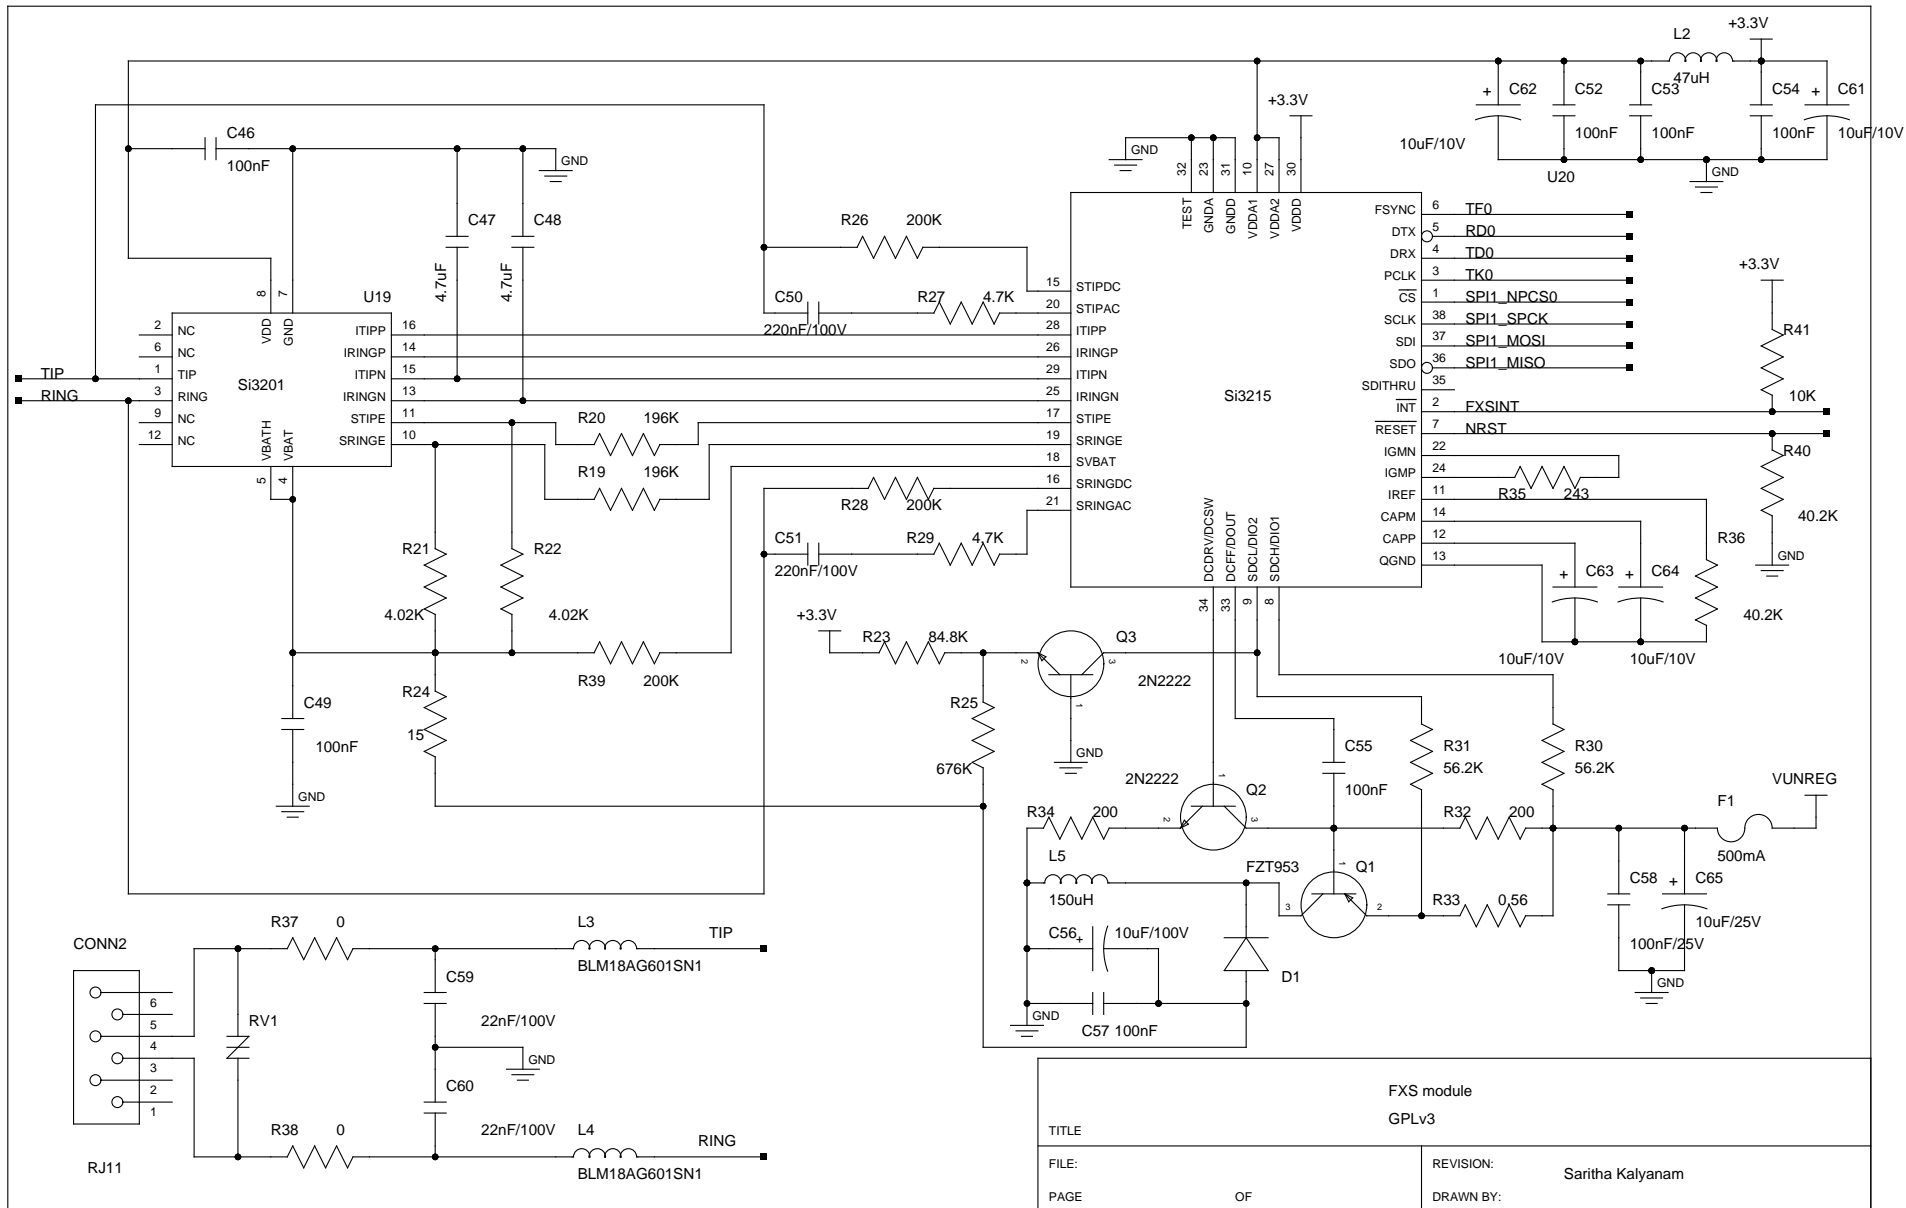


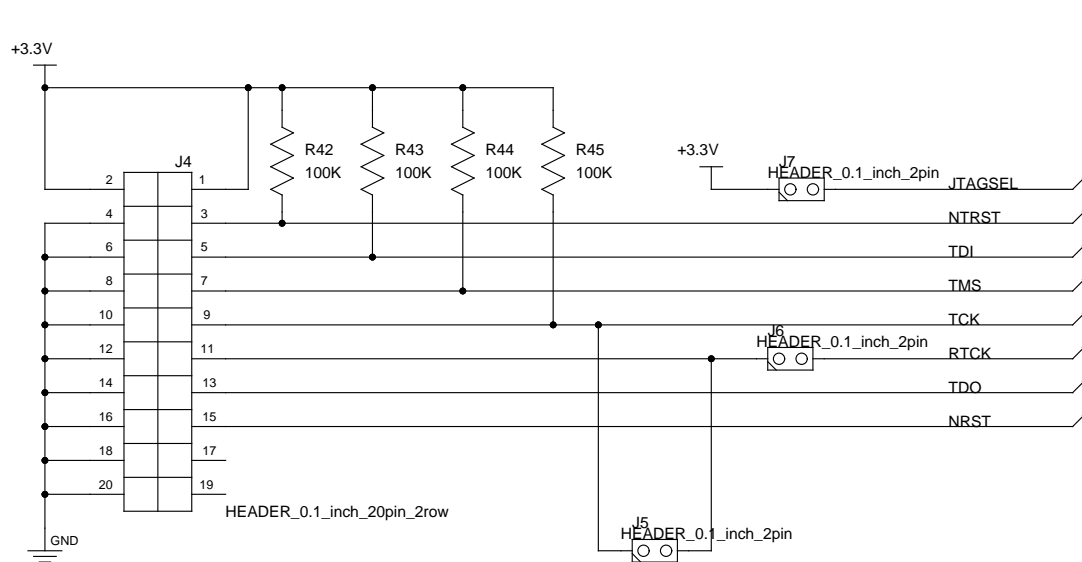


TITLE		JTAG/ICE interface GPLv3	
FILE:		REVISION:	
PAGE	OF	DRAWN BY:	Saritha Kalyanam

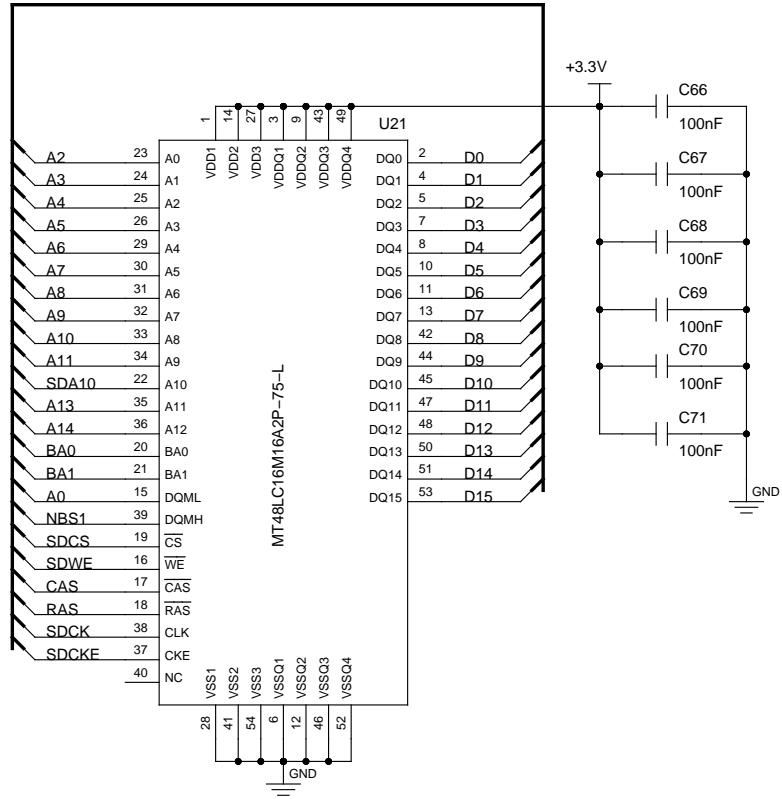


TITLE		SDRAM 32 MB (16-bit mode)	
FILE:		REVISION:	Saritha Kalyanam
PAGE	OF	DRAWN BY:	GPLv3

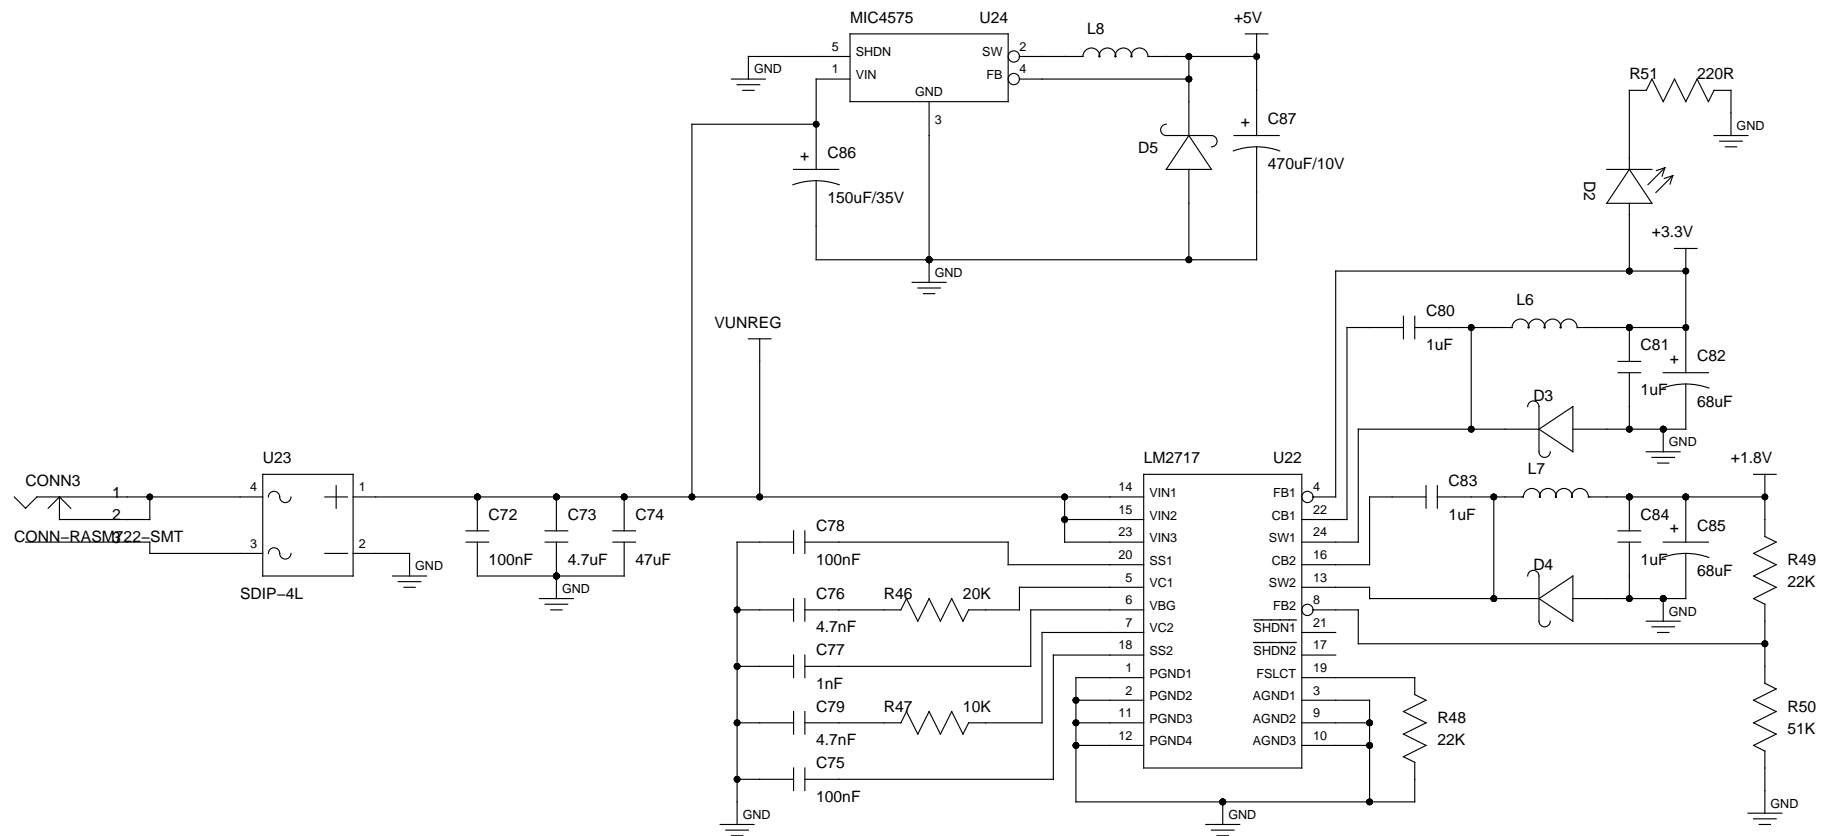

Power Supply		
GPLv3		
TITLE		
FILE:		REVISION:
PAGE	OF	DRAWN BY: Saritha Kalyanam

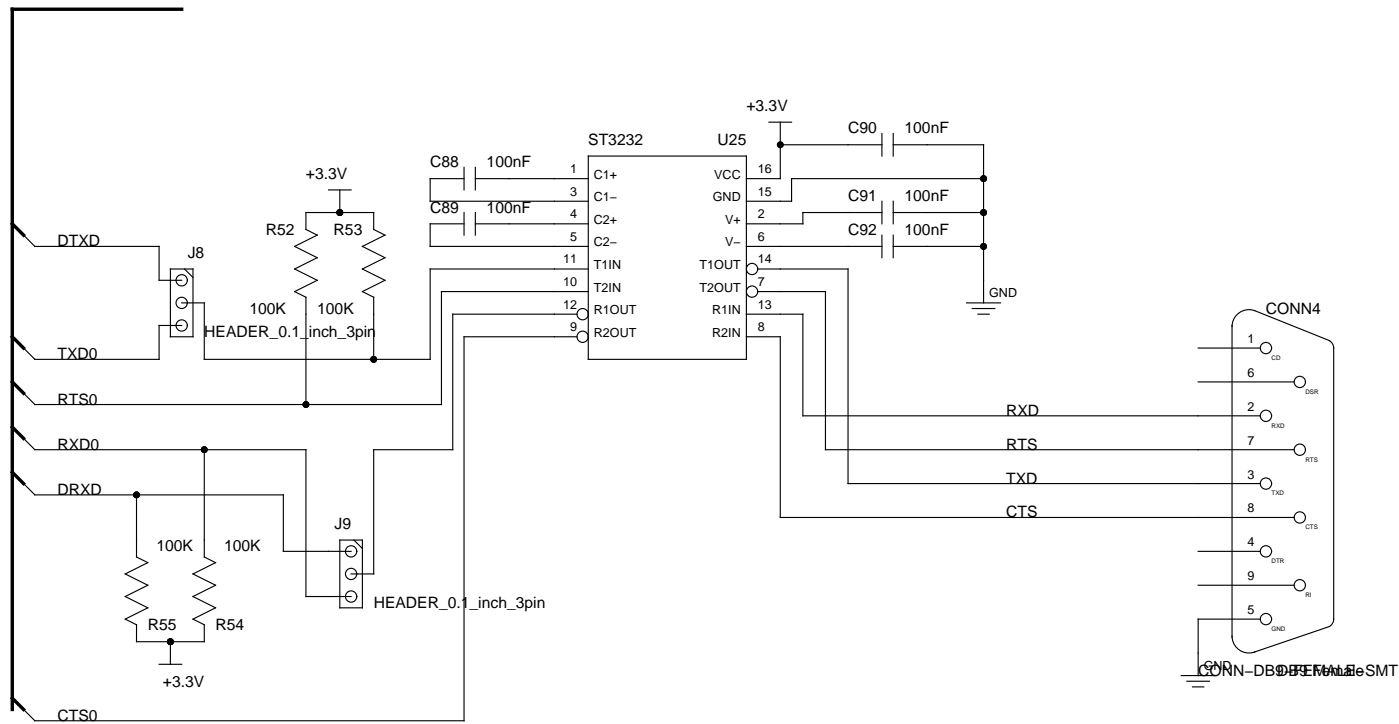


Serial Port (RS232 and DBGU)			
GPL v3			
TITLE			
FILE:		REVISION:	Saritha Kalyanam
PAGE	OF	DRAWN BY:	

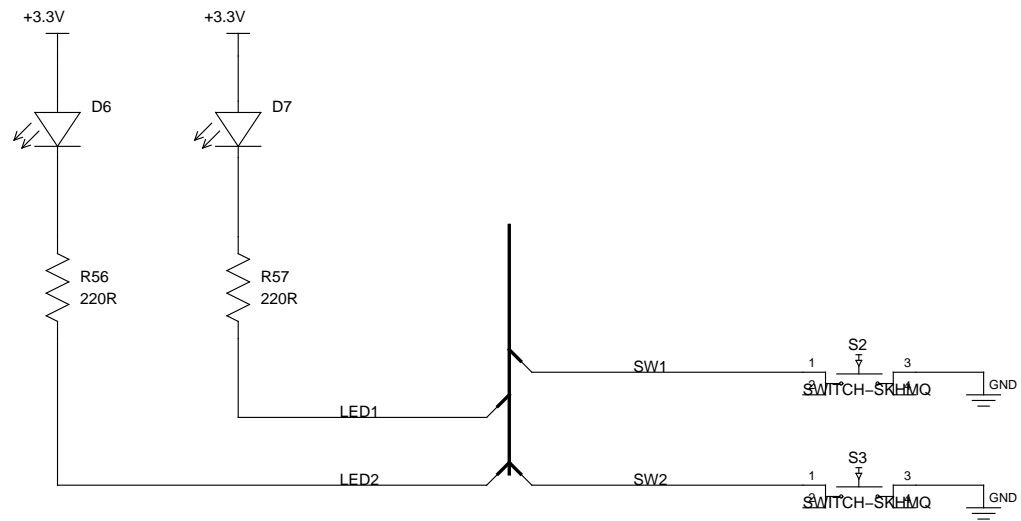

TITLE		UI GPLv3	
FILE:		REVISION:	Saritha Kalyanam
PAGE	OF	DRAWN BY:	



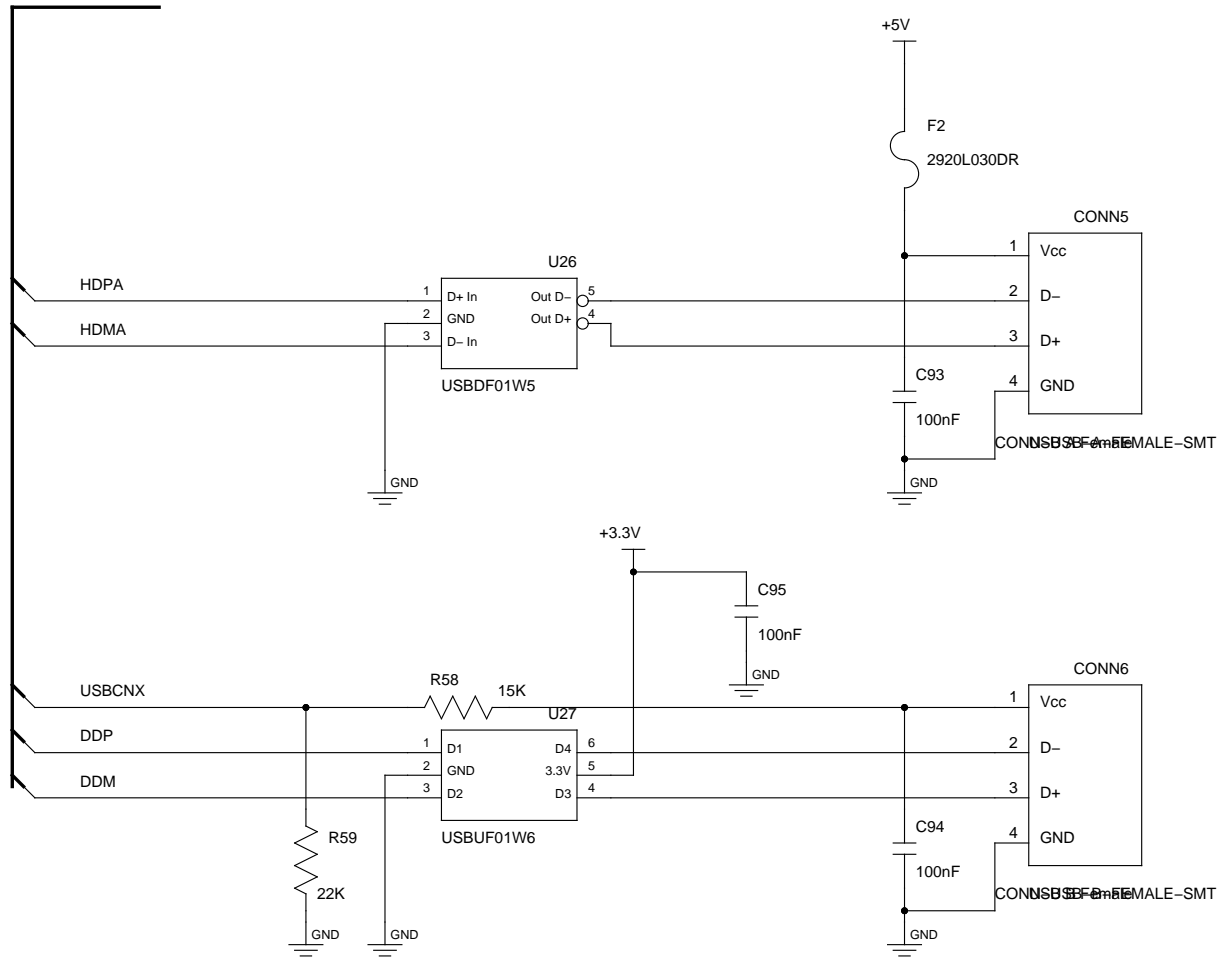

USB Host and Device		
GPLv3		
TITLE		
FILE:		REVISION: Saritha Kalyanam
PAGE	OF	DRAWN BY: