


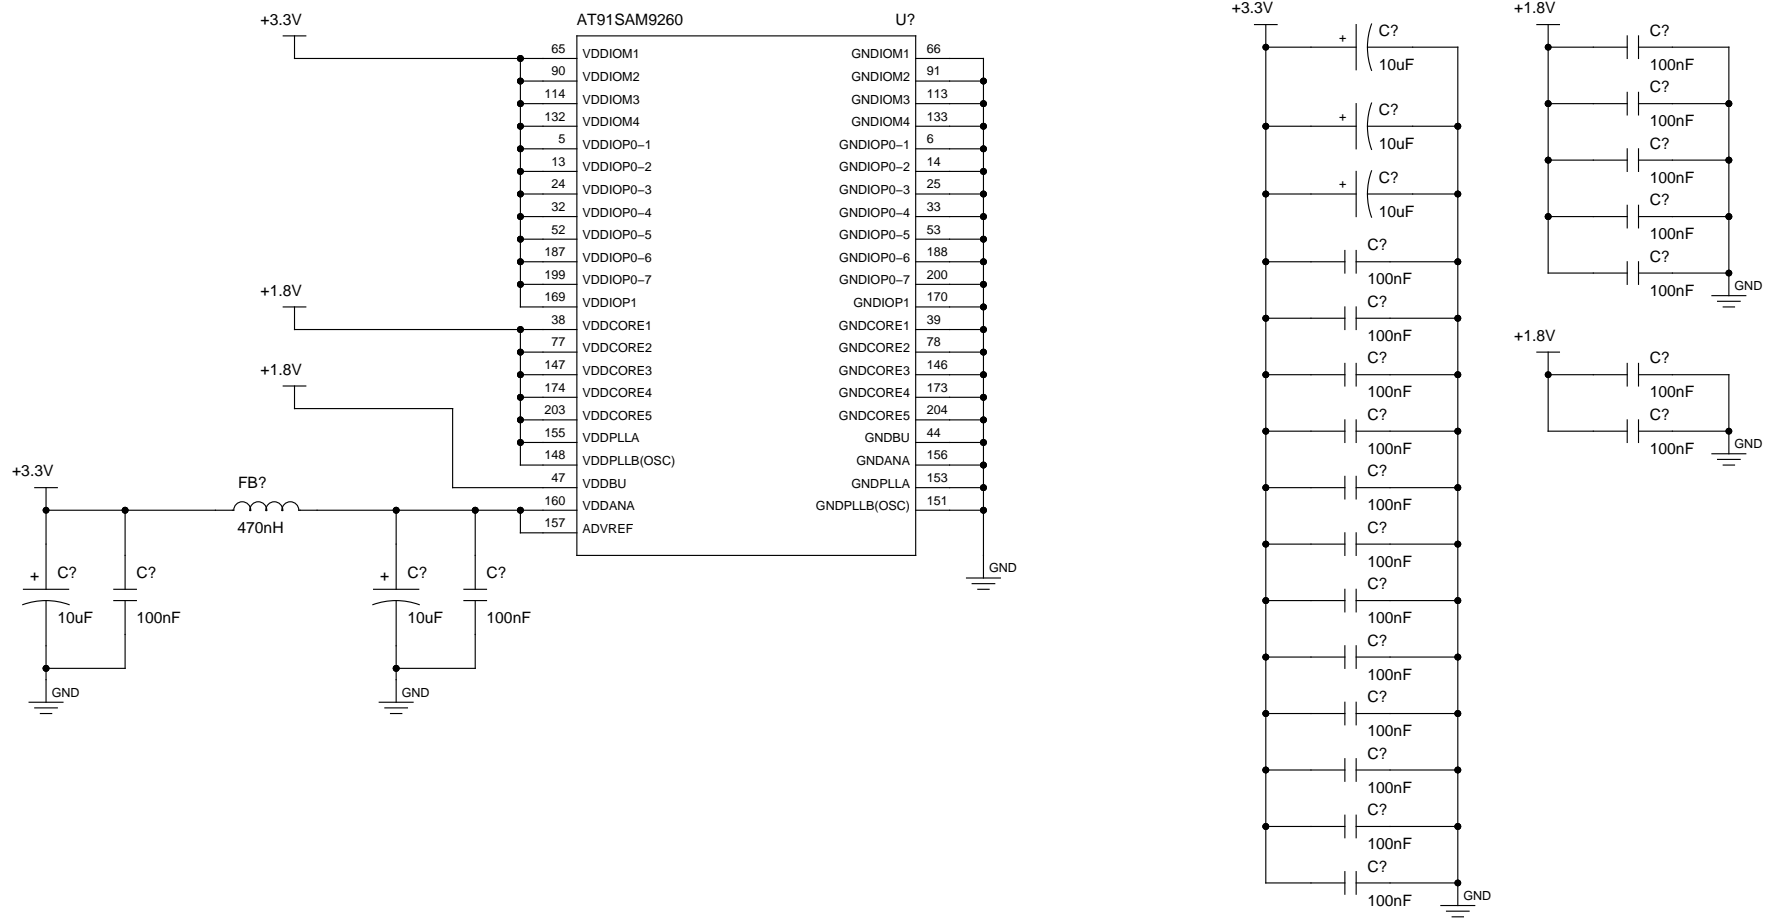


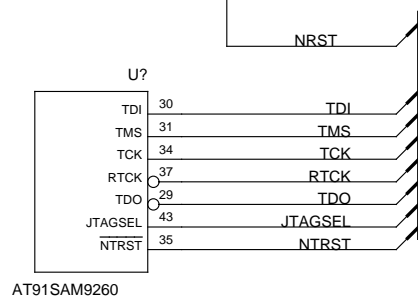

AT91SAM9260 based Telephone ATA Design (GPL v3)		
FILE:		REVISION:
PAGE	OF	DRAWN BY: Saritha Kalyanam

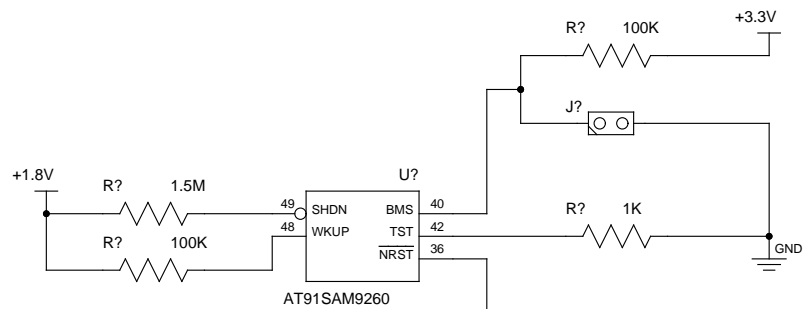

Power		
GPLv3		
TITLE		
FILE:		REVISION:
PAGE	OF	DRAWN BY: Saritha Kalyanam

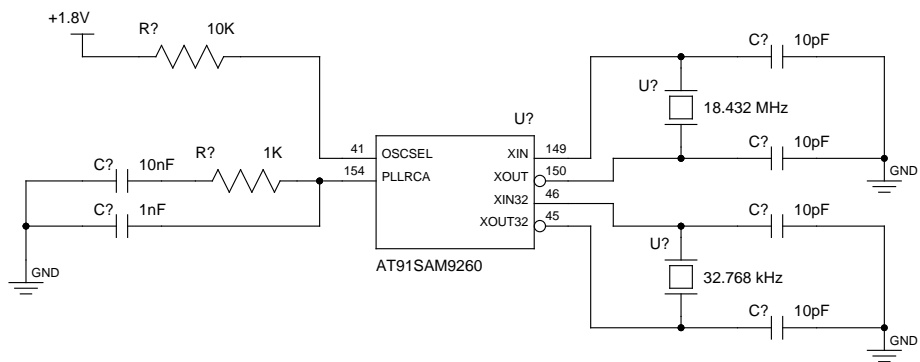

Note:

REMAP=0, BMS=1 to boot using AT91SAM9260's internal ROM boot program.
OSCSEL=1, external slow clock (32.768 KHz)

Clock and JTAG/ICE
GPLv3

FILE:


PAGE

OF

REVISION:

DRAWN BY:


Saritha Kalyanam

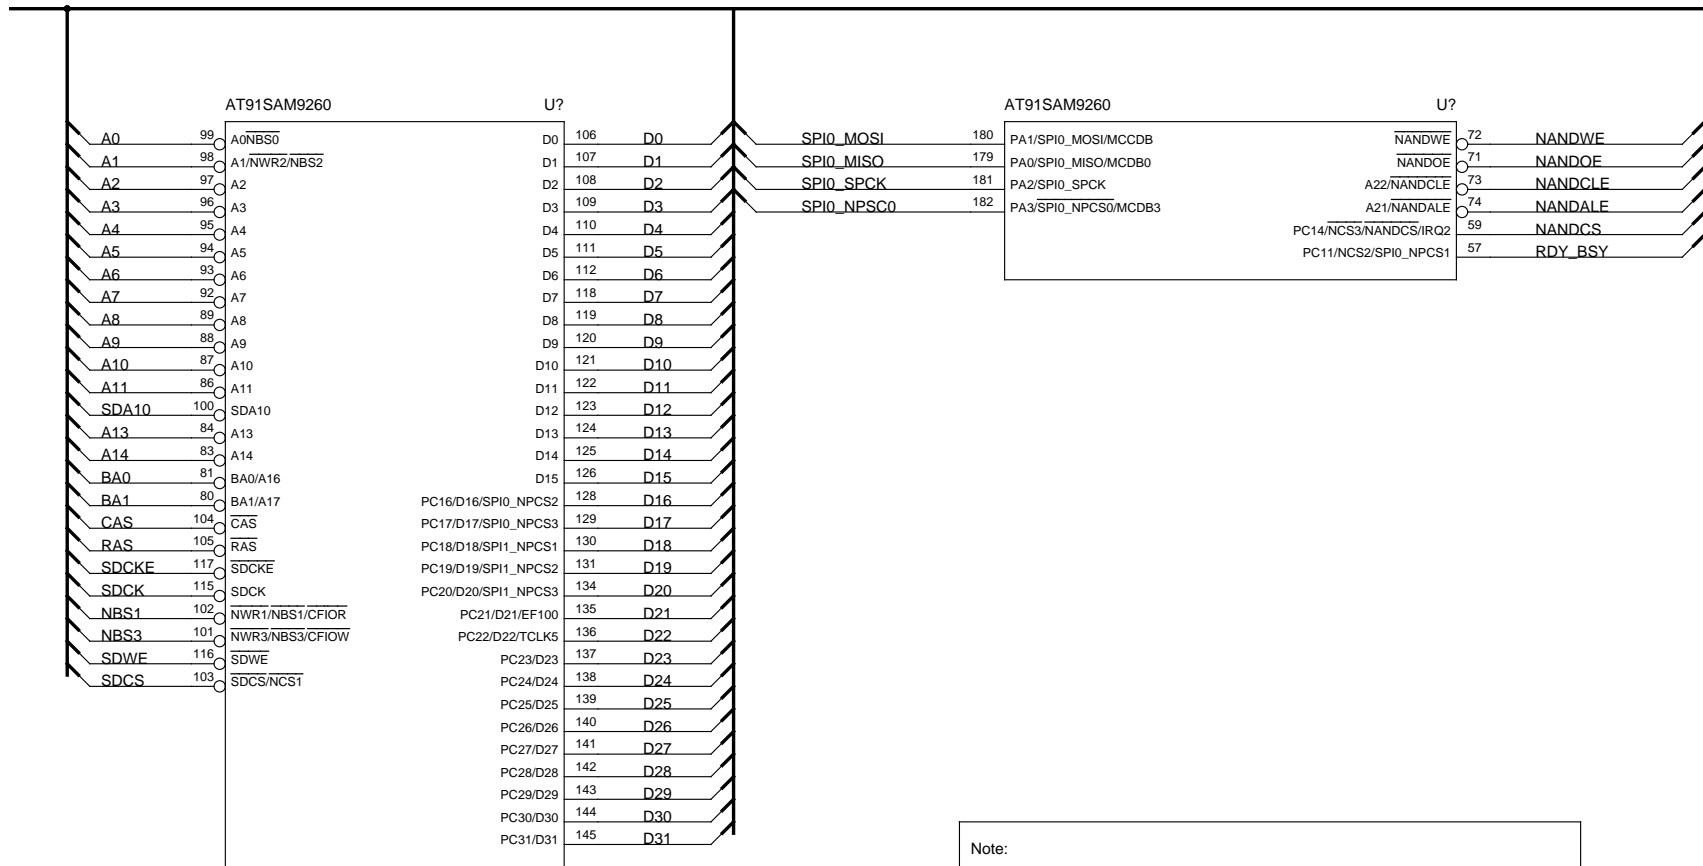

Note:

PIO_C11 is used for RDY_BSY interrupt from the NAND flash.

SDRAM & Serial SPI Data flash & NAND flash	
GPLv3	
TITLE	
FILE:	REVISION:
PAGE	DRAWN BY: Sariitha Kalyanam

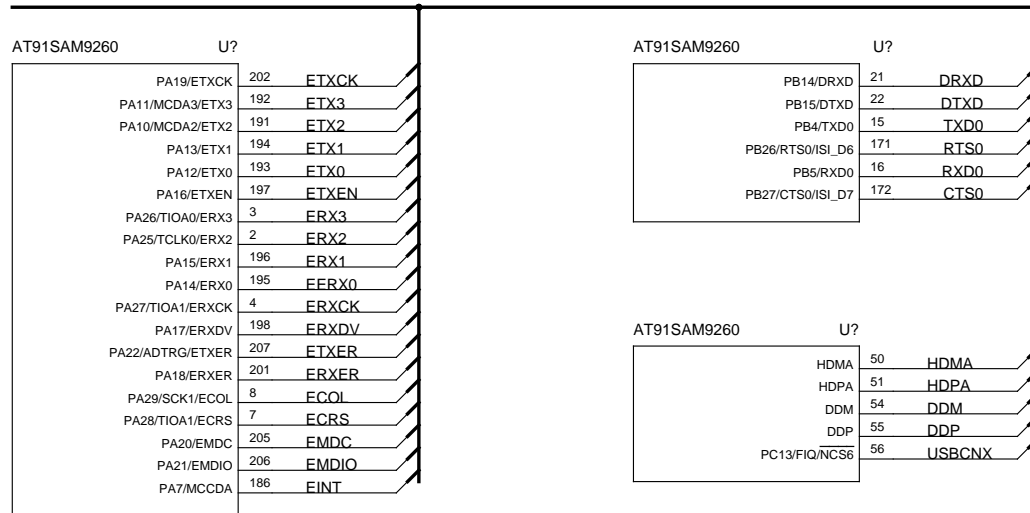


Note:

PIO_A7 is used for PHY interrupt.

PIO_C13 is used for 5V detection when plugged into a USB host port.

Ethernet 10/100 & DBGU/Serial & USB Host/Device	
TITLE GPLv3	
FILE:	REVISION:
PAGE	DRAWN BY: Saritha Kalyanam
OF	

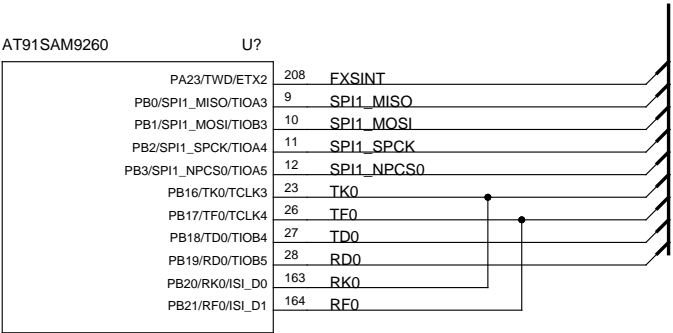

Note:


Clock: TK0 and RK0 are connected together, with RK0 configured as an input.

FSYNC: TF0 and RF0 are connected together, with RF0 configured as an input.

SSC interface (for FXS Si321x)			
GPLv3			
TITLE			
FILE:			REVISION:
PAGE	OF		DRAWN BY: Saritha Kalyanam

AT91SAM9260

U?

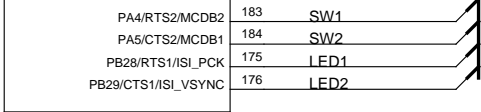


TITLE		User Interface (LEDs and Interrupts)	
FILE:		REVISION:	
PAGE		DRAWN BY:	
OF		Saritha Kalyanam	
		GPLv3	


U?


AT91SAM9260			
183	PA4/RTS2/MCDB2	NC	152
184	PA5/CTS2/MCDB1	NRD/CFOE	69
208	PA23/TWD/ETX2	NWR0/NWE/CFWE	70
1	PA24/TWCK/ETX3	NCS0	68
17	PB6/TXD1/TCLK1	A12	85
18	PB7/RXD1/TCLK2	A15	82
19	PB8/TXD2	A18	79
20	PB9/RXD2	A19	76
161	PB10/TXD3/ISL_D8	A20	75
162	PB11/RXD3/ISL_D9		
165	PB22/DSR0/ISL_D2		
166	PB23/CDC0/ISL_D3		
167	PB24/DTR0/ISL_D4		
168	PB25/RIO/ISL_D5		
175	PB28/RTS1/ISL_PCK		
176	PB29/CTS1/ISL_VSYNC		
158	PC0		
159	PC1		
62	PC4/A23/SPI1_NPCS2		
63	PC6/TIOB2/CFCE1		
64	PC7/TIOB1/CFCE2		
61	PC8/NCS4/CFCS0/RTS3		
60	PC9/NCS5/CFCS1/TIOB0		
58	PC10/A25/CFRNW/CTS3		
57	PC11/NCS2/SPI0_NPCS1		
127	PC15/NWAIT/IRQ1		


Unconnected pins	
GPLv3	
TITLE	
FILE:	REVISION:
PAGE	DRAWN BY: Saritha Kalyanam
OF	

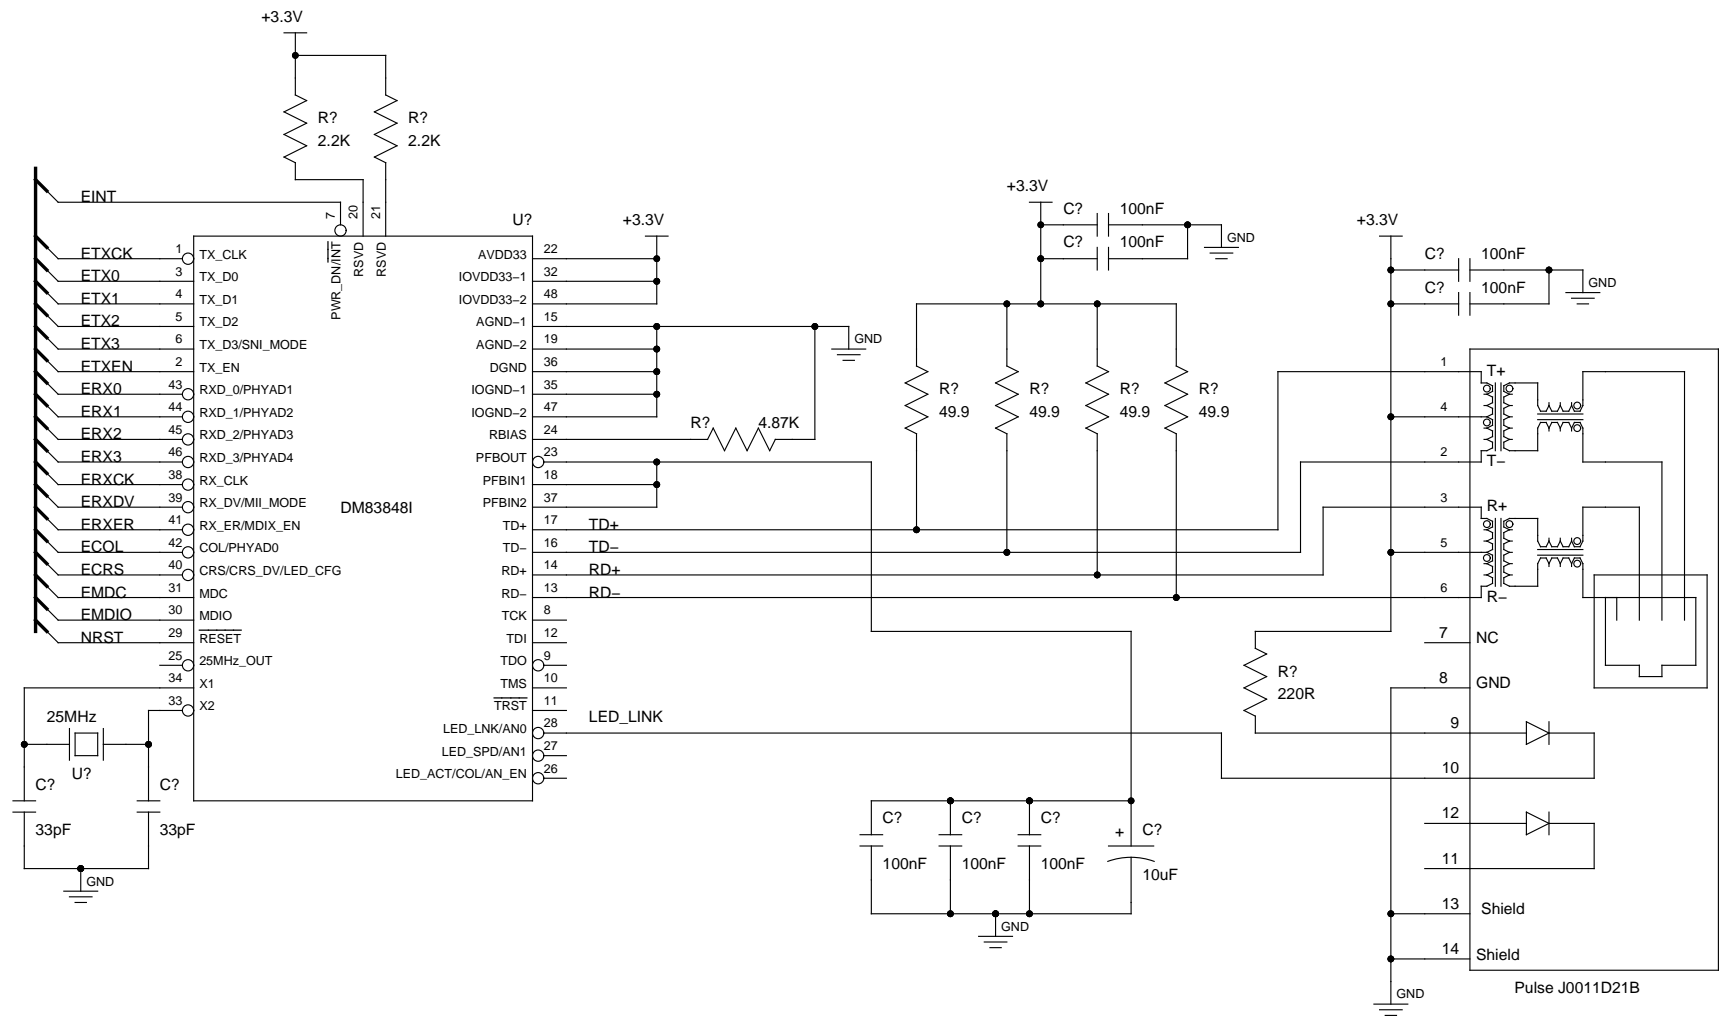


Ethernet 10/100 GPLv3		
TITLE		
FILE:		REVISION:
PAGE	OF	DRAWN BY: Sariitha Kalyanam

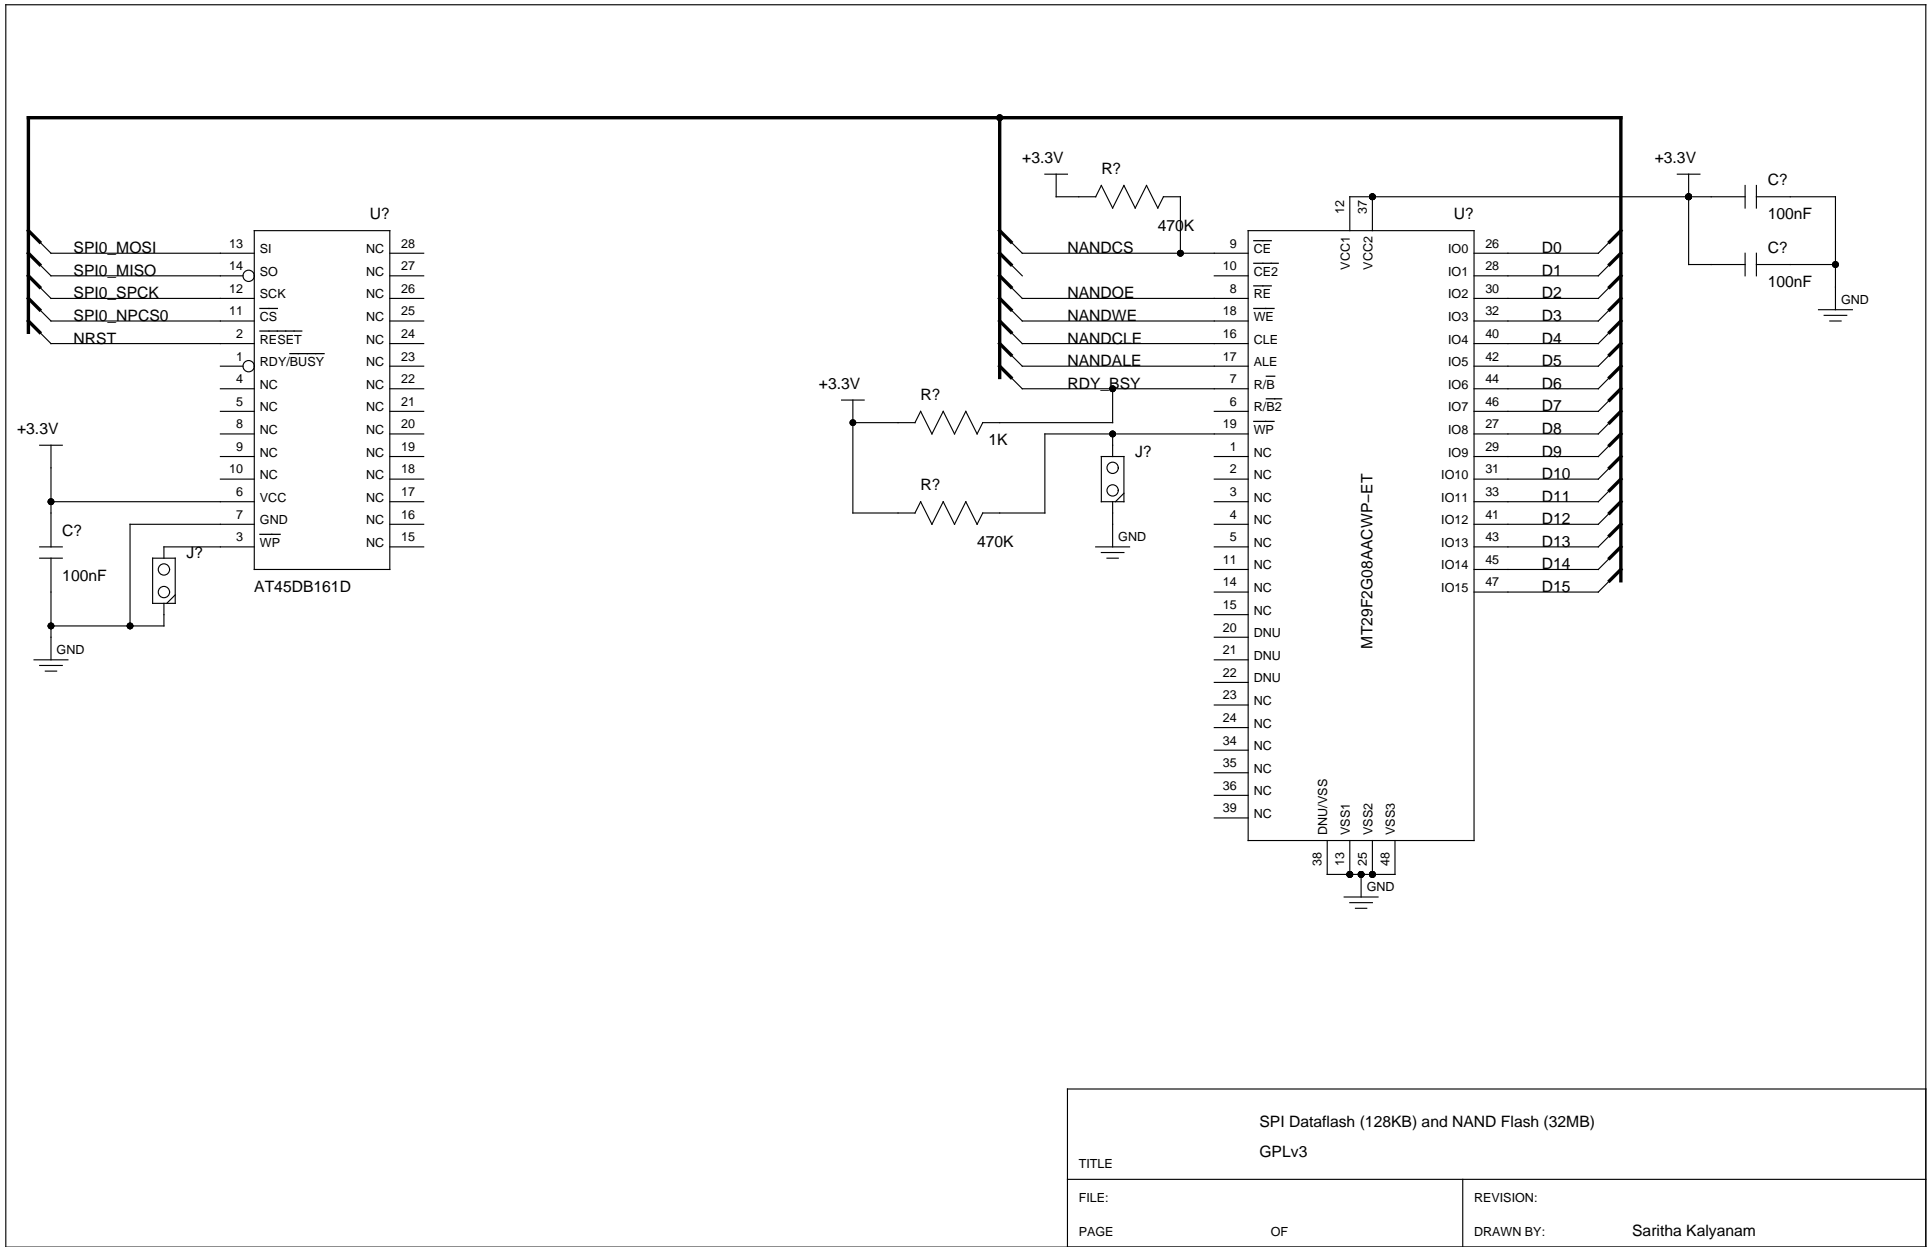

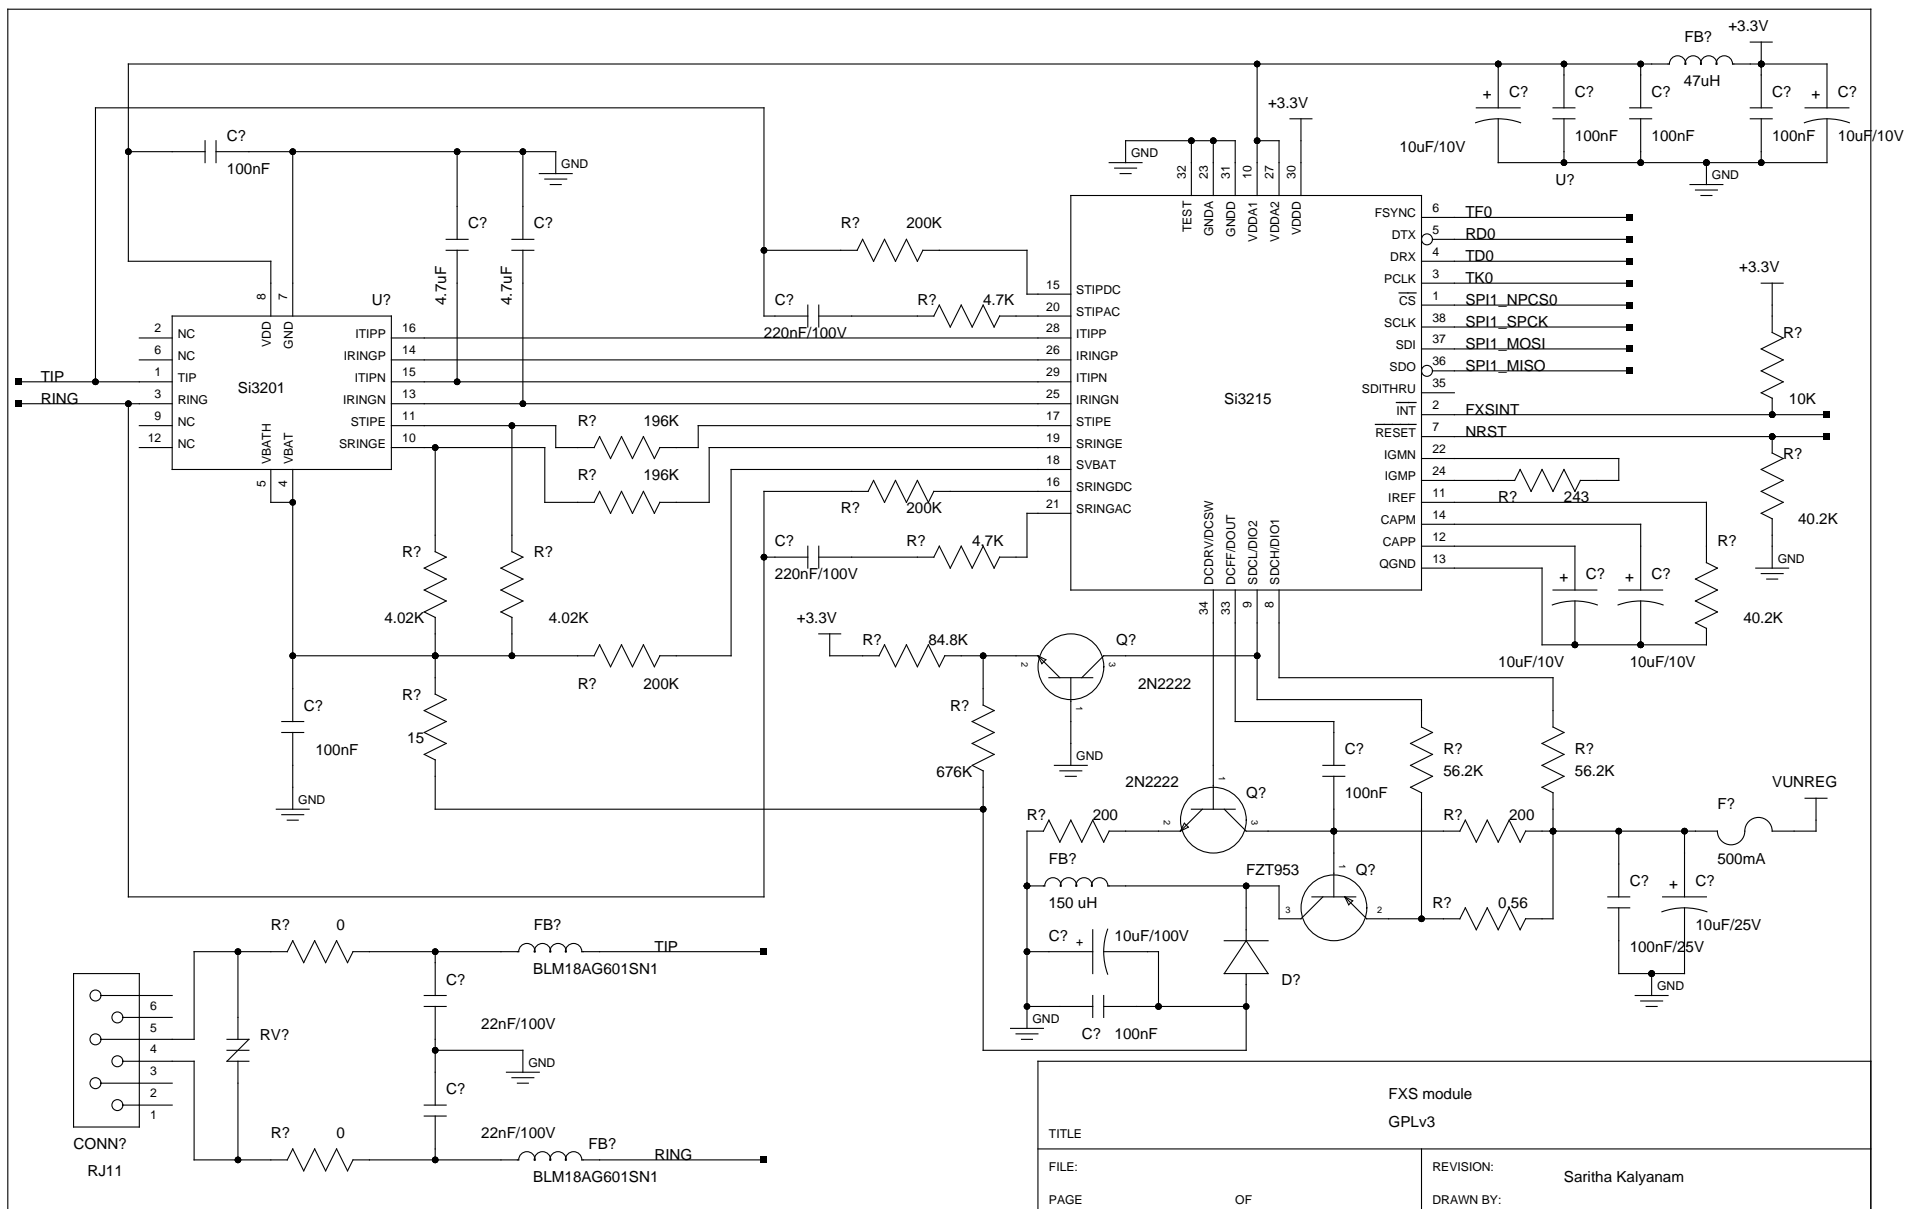


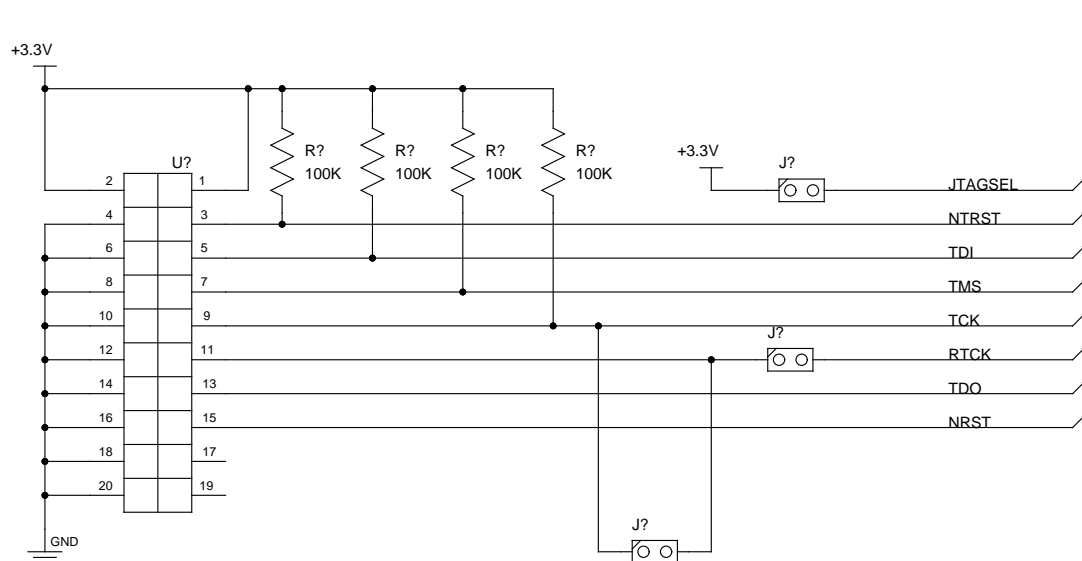


TITLE		JTAG/ICE interface GPLv3	
FILE:		REVISION:	
PAGE	OF	DRAWN BY:	Saritha Kalyanam

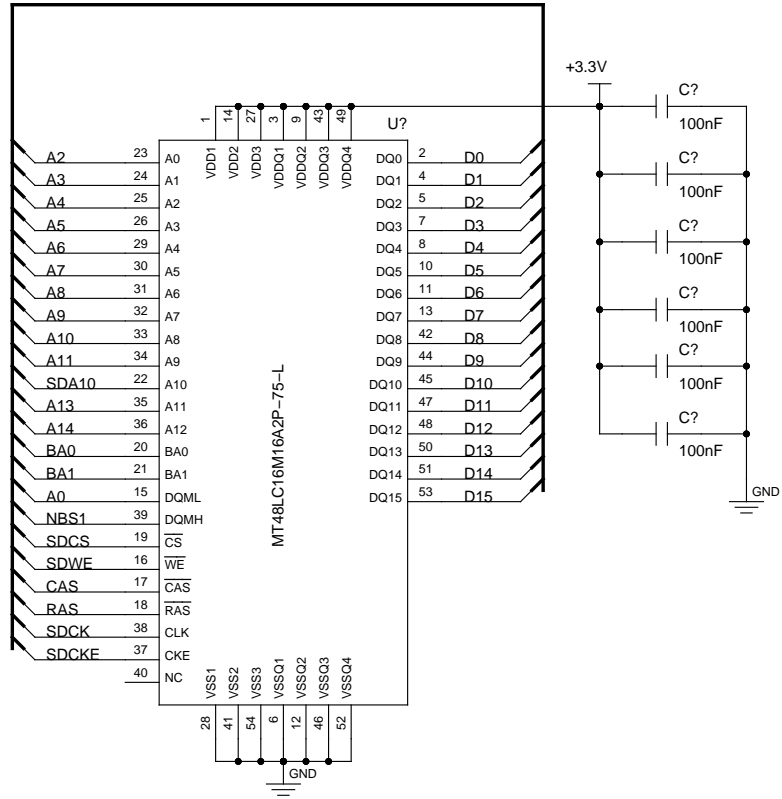

TITLE		SDRAM 32 MB (16-bit mode)	
FILE:		REVISION:	Saritha Kalyanam
PAGE	OF	DRAWN BY:	GPLv3

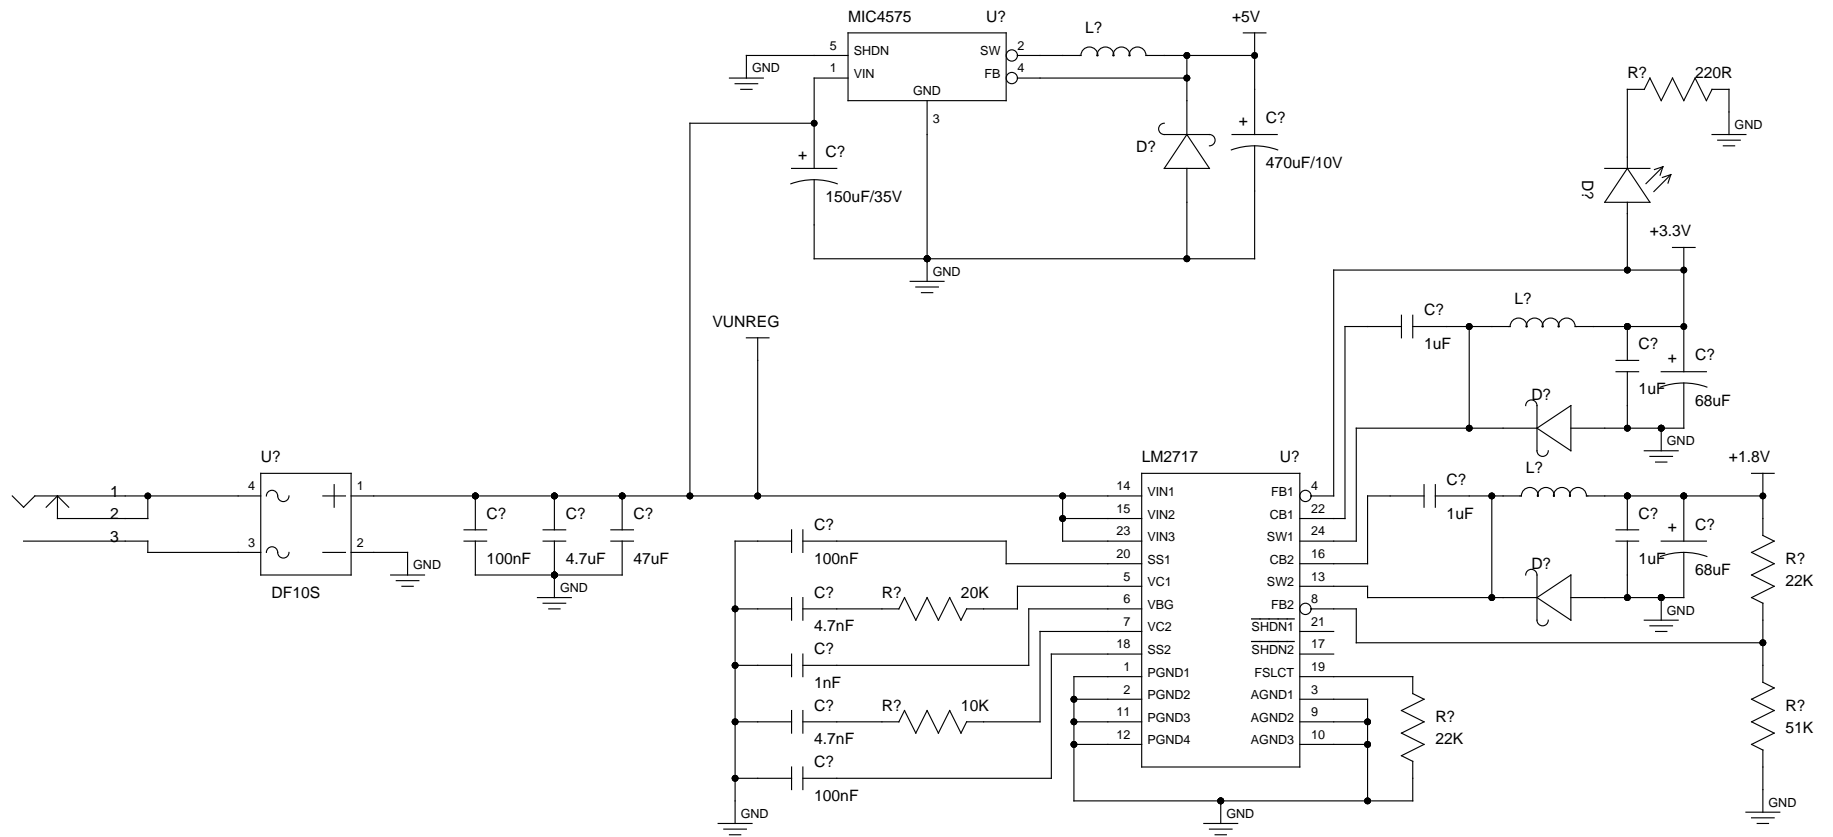

Power Supply		
GPLv3		
TITLE		
FILE:		REVISION:
PAGE	OF	DRAWN BY: Saritha Kalyanam

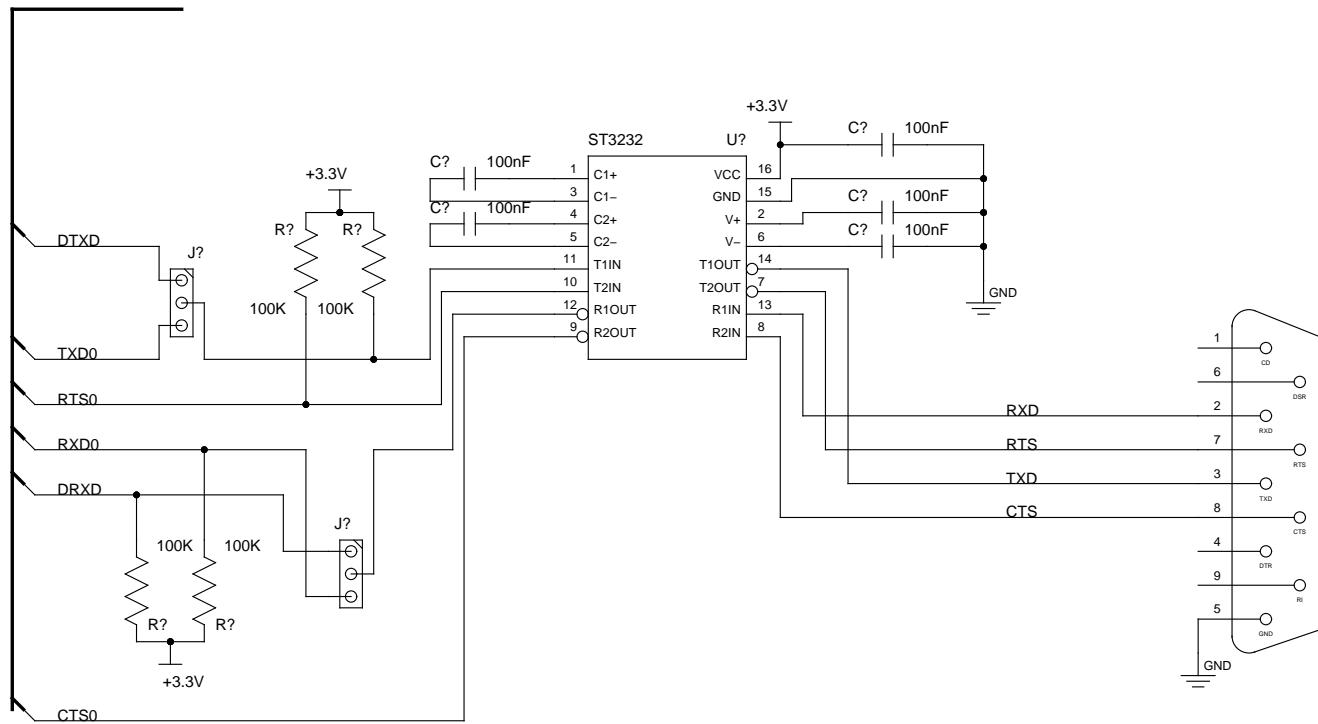

Serial Port (RS232 and DBGU)

GPL v3

TITLE

FILE:


PAGE

OF


REVISION:

DRAWN BY:

Saritha Kalyanam

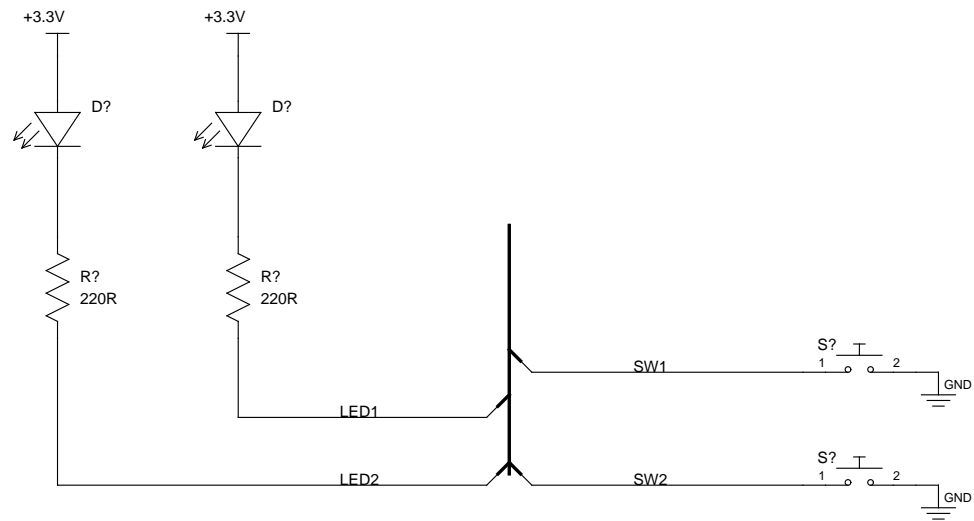

TITLE		UI GPLv3	
FILE:		REVISION:	Saritha Kalyanam
PAGE	OF	DRAWN BY:	

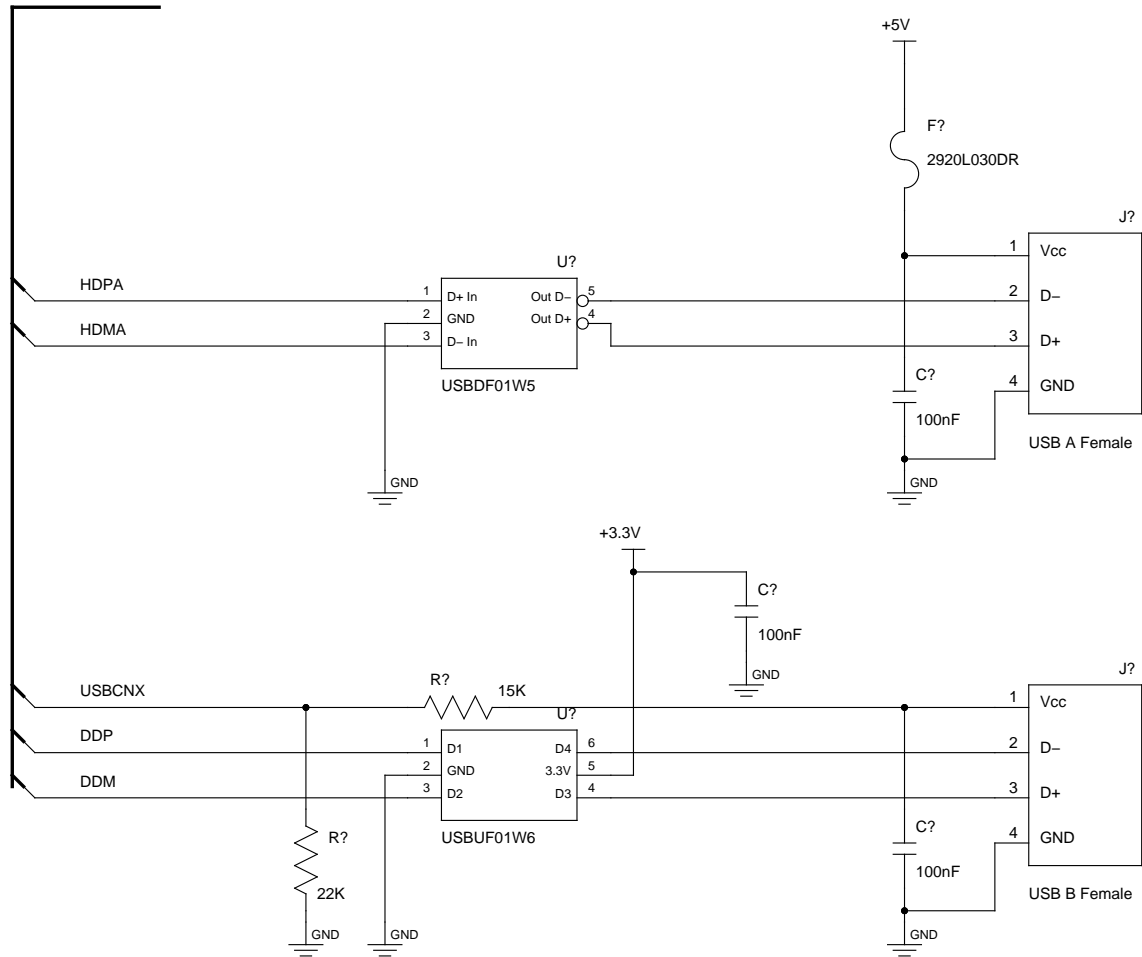

TITLE		USB Host and Device	
		GPLv3	
FILE:		REVISION:	Saritha Kalyanam
PAGE	OF	DRAWN BY:	