X5R Dielectric

General Specifications



GENERAL DESCRIPTION

- General Purpose Dielectric for Ceramic Capacitors
- EIA Class II Dielectric
- Temperature variation of capacitance is within ±15% from -55°C to +85°C
- Well suited for decoupling and filtering applications
- Available in High Capacitance values (up to 100µF)

PART NUMBER (SEE PAGE 4 FOR COMPLETE PART NUMBER EXPLANATION)

1210	4	D	107	M	A	T	2	A
Size (L" x W") 0101** 0201 0402 0603 0805 1206 1210 1812 **EIA 01005	**Voltage** 4 = 4V 6 = 6.3V Z = 10V Y = 16V 3 = 25V D = 35V 5 = 50V 1 = 100V	**Dielectric** D = X5R	**Capacitance Code (In pF)** 2 Sig. Digits + Number of Zeros	**Capacitance Tolerance** K = ±10% M = ± 20%	**Failure Rate** A = N/A	**Terminations** T = Plated Ni and Sn	**Packaging** 2 = 7" Reel 4 = 13" Reel U = 4mm TR (01005)	**Special Code** A = Std.

RoHS COMPLIANT

NOTE: Contact factory for availability of Tolerance Options for Specific Part Numbers. Contact factory for non-specified capacitance values.

TYPICAL ELECTRICAL CHARACTERISTICS

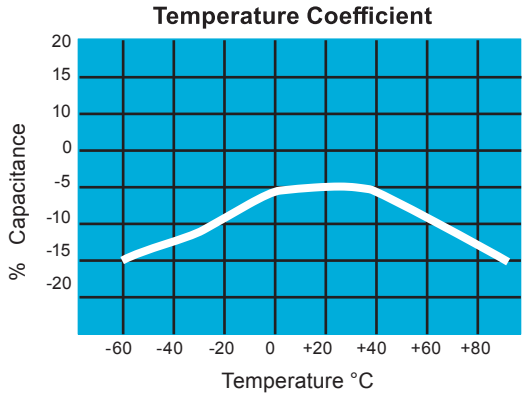

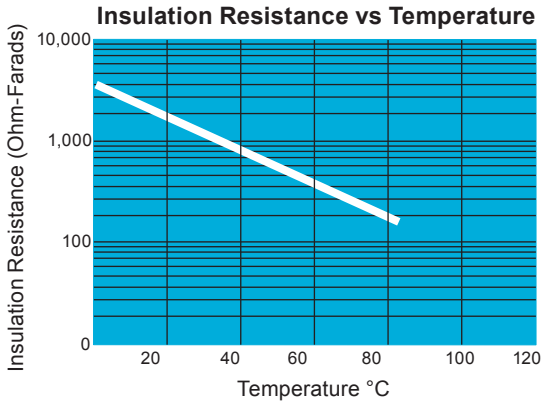

X5R Dielectric

Specifications and Test Methods

Parameter/Test		X5R Specification Limits	Measuring Conditions	
Operating Temperature Range		-55ºC to +85ºC	Temperature Cycle Chamber	
Capacitance		Within specified tolerance	Freq.: 1.0 kHz ± 10% Voltage: 1.0Vrms ± .2V For Cap > 10 µF, 0.5Vrms @ 120Hz	
Dissipation Factor		≤ 2.5% for ≥ 50V DC rating ≤ 12.5% for 25V, 35V DC rating ≤ 12.5% Max. for 16V DC rating and lower Contact Factory for DF by PN		
Insulation Resistance		10,000MΩ or 500MΩ - µF, whichever is less	Charge device with rated voltage for 120 ± 5 secs @ room temp/humidity	
Dielectric Strength		No breakdown or visual defects	Charge device with 250% of rated voltage for 1-5 seconds, w/charge and discharge current limited to 50 mA (max)	
Resistance to Flexure Stresses	Appearance	No defects	Deflection: 2mm Test Time: 30 seconds 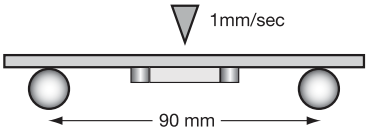	
	Capacitance Variation	≤ ±12%		
	Dissipation Factor	Meets Initial Values (As Above)		
	Insulation Resistance	≥ Initial Value x 0.3		
Solderability		≥ 95% of each terminal should be covered with fresh solder	Dip device in eutectic solder at 230 ± 5ºC for 5.0 ± 0.5 seconds	
Resistance to Solder Heat	Appearance	No defects, <25% leaching of either end terminal	Dip device in eutectic solder at 260ºC for 60seconds. Store at room temperature for 24 ± 2hours before measuring electrical properties.	
	Capacitance Variation	≤ ±7.5%		
	Dissipation Factor	Meets Initial Values (As Above)		
	Insulation Resistance	Meets Initial Values (As Above)		
	Dielectric Strength	Meets Initial Values (As Above)		
Thermal Shock	Appearance	No visual defects	Step 1: -55ºC ± 2º	30 ± 3 minutes
	Capacitance Variation	≤ ±7.5%	Step 2: Room Temp	≤ 3 minutes
	Dissipation Factor	Meets Initial Values (As Above)	Step 3: +85ºC ± 2º	30 ± 3 minutes
	Insulation Resistance	Meets Initial Values (As Above)	Step 4: Room Temp	≤ 3 minutes
	Dielectric Strength	Meets Initial Values (As Above)	Repeat for 5 cycles and measure after 24 ± 2 hours at room temperature	
Load Life	Appearance	No visual defects	Charge device with 1.5X rated voltage in test chamber set at 85ºC ± 2ºC for 1000 hours (+48, -0). Note: Contact factory for *optional specification part numbers that are tested at < 1.5X rated voltage. Remove from test chamber and stabilize at room temperature for 24 ± 2 hours	
	Capacitance Variation	≤ ±12.5%		
	Dissipation Factor	≤ Initial Value x 2.0 (See Above)		
	Insulation Resistance	≥ Initial Value x 0.3 (See Above)		
	Dielectric Strength	Meets Initial Values (As Above)		
Load Humidity	Appearance	No visual defects	Store in a test chamber set at 85ºC ± 2ºC/ 85% ± 5% relative humidity for 1000 hours (+48, -0) with rated voltage applied. Remove from chamber and stabilize at room temperature and humidity for 24 ± 2 hours before measuring.	
	Capacitance Variation	≤ ±12.5%		
	Dissipation Factor	≤ Initial Value x 2.0 (See Above)		
	Insulation Resistance	≥ Initial Value x 0.3 (See Above)		
	Dielectric Strength	Meets Initial Values (As Above)		

X5R Dielectric

Capacitance Range

PREFERRED SIZES ARE SHADED

Case Size			0101*		0201					0402						0603							0805						
Soldering			Reflow Only		Reflow Only					Reflow/Wave						Reflow/Wfeve							Reflow/Wfeve						
Packaging			Paper/Embossed		All Paper					All Paper						All Paper							Paper/Embossed						
(L) Length		mm	0.40 ± 0.02		0.60 ± 0.09					1.00 ± 0.20						1.60 ± 0.15							2.01 ± 0.20						
		(in.)	(0.016 ± 0.0008)		(0.024 ± 0.004)					(0.040 ± 0.008)						(0.063 ± 0.006)							(0.079 ± 0.008)						
W) Width		mm	0.20 ± 0.02		0.30 ± 0.09					0.50 ± 0.20						0.81 ± 0.15							1.25 ± 0.20						
		(in.)	(0.008 ± 0.0008)		(0.011 ± 0.004)					(0.020 ± 0.008)						(0.032 ± 0.006)							(0.049 ± 0.008)						
(t) Terminal		mm	0.10 ± 0.04		0.15 ± 0.05					0.25 ± 0.15						0.35 ± 0.15							0.50 ± 0.25						
		(in.)	(0.004 ± 0.0016)		(0.006 ± 0.002)					(0.010 ± 0.006)						(0.014 ± 0.006)							(0.020 ± 0.010)						
Voltage:			6.3	10	4	6.3	10	16	25	4	6.3	10	16	25	50	4	6.3	10	16	25	35	50	4	6.3	10	16	25	35	50
Cap (pF)	100	101		B					A																				
	150	151		B					A																				
	220	221		B					A						C														
	330	331		B					A						C														
	470	471		B					A						C														
	680	681		B					A						C														
	1000	102		B				A	A						C														
	1500	152	B	B				A	A						C														
	2200	222	B	B			A	A	A						C														
	3300	332	B	B			A	A	A						C														
	4700	472	B	B			A	A	A					C								G							
	6800	682	B	B			A	A	A					C								G							
Cap (µF)	0.01	103	B	B			A	A	A					C						G	G	G							
	0.015	150	B											C						G	G	G							
	0.022	223	B			A	A	A	A				C	C						G	G	G							N
	0.033	333	B										C							G	G	G							N
	0.047	473	B			A	A	A	A				C	C						G	G	G							N
	0.068	689	B										C							G		G							N
	0.1	104	B			A	A	A	A			C	C	C	C					G	G	G					N	N	N
	0.15	154																		G							N	N	
	0.22	224	B		A	A	A				C	C	C	C	C				G	G							N	N	N
	0.33	334																	G	G							N		
	0.47	474	B		A	A				C	C	C	C	C	E				G	J							N	P	P
	0.68	684																	G								N		
	1.0	105			A	A	C	C		C	C	C	C	C		G	G	G	G	J	G	G				N	N	P	P
	1.5	155																											
	2.2	225			C	C	C			C	C	C	C	C		G	G	J	J	J	K	K			N	N	P	P	P
	3.3	335														J	J	J						N	N				
	4.7	475								E	E	E	E			J	J	J	G	G			N	P	J	N	N	P	P
	10	106								E	E	E				K	J	J	J				P	P	P	P	P		
	22	226								E	E					K	K	K					P	P	P	P	P		
	47	476														K	K						P	P	P				
	100	107																											
Voltage:			6.3	10	4	6.3	10	16	25	4	6.3	10	16	25	50	4	6.3	10	16	25	35	50	4	6.3	10	16	25	35	50
Case Size			0101*		0201					0402						0603							0805						

Letter	A	B	C	E	G	J	K	M	N	P	Q	X	Y	Z
Max. Thickness	0.33 (0.013)	0.22 (0.009)	0.56 (0.022)	0.71 (0.028)	0.90 (0.035)	0.94 (0.037)	1.02 (0.040)	1.27 (0.050)	1.40 (0.055)	1.52 (0.060)	1.78 (0.070)	2.29 (0.090)	2.54 (0.100)	2.79 (0.110)
	PAPER						EMBOSSED							

PAPER and EMBOSSED available for 01005
NOTE: Contact factory for non-specified capacitance values
*EIA 01005

X5R Dielectric

Capacitance Range

PREFERRED SIZES ARE SHADED

Case Size			1206							1210							1812						
Soldering			Reflow/Wave							Reflow Only							Reflow Only						
Packaging			Paper/Embossed							Paper/Embossed							All Embossed						
(L) Length		mm	3.20 ± 0.40							3.20 ± 0.40							4.50 ± 0.30						
		(in.)	(0.126 ± 0.016)							(0.126 ± 0.016)							(0.177 ± 0.012)						
W) Width		mm	1.60 ± 0.30							2.50 ± 0.30							3.20 ± 0.20						
		(in.)	(0.063 ± 0.012)							(0.098 ± 0.012)							(0.126 ± 0.008)						
(t) Terminal		mm	0.50 ± 0.25							0.50 ± 0.25							0.61 ± 0.36						
		(in.)	(0.020 ± 0.010)							(0.020 ± 0.010)							(0.024 ± 0.014)						
Voltage:			4	6.3	10	16	25	35	50	4	6.3	10	16	25	35	50	4	6.3	10	16	25	35	50
Cap (pF)	100	101																					
	150	151																					
	220	221																					
	330	331																					
	470	471																					
	680	681																					
	1000	102																					
	1500	152																					
	2200	222																					
	3300	332																					
	4700	472																					
	6800	682																					
Cap (µF)	0.01	103																					
	0.015	150																					
	0.022	223																					
	0.033	333																					
	0.047	473																					
	0.068	689																					
	0.1	104																					
	0.15	154																					
	0.22	224																					
	0.33	334																					
	0.47	474					Q	Q							X	X							
	0.68	684																					
	1.0	105					Q	Q	Q					X	X	X							
	1.5	155																					
	2.2	225			Q	Q	Q	Q	Q					X	Z	Z							
	3.3	335		Q	Q																		
	4.7	475	X	X	X	X	X	X	X			Z	Z	Z	Z	Z							
	10	106	X	X	X	X	X	X	X		X	X	Z	Z	Z	Z					Z		
	22	226	X	X	X	X	X			Z	Z	Z	Z	Z			Z	Z	Z	Z			
	47	476	X	X	X	X				Z	Z	Z	Z	Z									
	100	107	X	X						Z	Z												
Voltage:			4	6.3	10	16	25	35	50	4	6.3	10	16	25	35	50	4	6.3	10	16	25	35	50
Case Size			1206							1210							1812						

Letter	A	B	C	E	G	J	K	M	N	P	Q	X	Y	Z
Max. Thickness	0.33 (0.013)	0.22 (0.009)	0.56 (0.022)	0.71 (0.028)	0.90 (0.035)	0.94 (0.037)	1.02 (0.040)	1.27 (0.050)	1.40 (0.055)	1.52 (0.060)	1.78 (0.070)	2.29 (0.090)	2.54 (0.100)	2.79 (0.110)
	PAPER						EMBOSSED							

PAPER and EMBOSSED available for 01005

NOTE: Contact factory for non-specified capacitance values
*EIA 01005

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

AVX:

08056D475MAT4A 08056D685KAT2A 08056D106KAT2A 08056D106KAT4A 08056D106MAT2A 08056D475KAT2A 08056D475KAT4A 08056D475MAT2A 0805YD105KAT2A 0805YD105KAT4A 0805YD105MA12A 0805YD105MAT2A 0805YD105MAT4A 0805YD225KAT2A 0805YD334KAT2A 0805YD474KAT2A 0805YD474KAT4A 0805YD474MAT2A 0805YD684KAT2A 0805YD684MAT2A 0805YD824MAT2A 12063D105KAT2A 12063D105MAT2A 12063D105MAT4A 12063D225KAT2A 12063D475KAT2A 12063D564KAT2A 0805ZD105KAT2A 0805ZD105KAT4A 0805ZD105MAT2A 0805ZD105MAT4A 0805ZD125KAT2A 0805ZD155KAT2A 0805ZD225KAT2A 0805ZD225KAT4A 0805ZD225MAT2A 0805ZD335KAT2A 0805ZD335MAT2A 0805ZD475KAT2A 0805ZD475KAT4A 0805ZD475MAT2A 12066D106KAT2A 12066D106KAT4A 12066D106MAT2A 12066D106MAT4A 12066D226KAT2A 12066D226MAT1A 12066D226MAT2A 12066D226MAT4A 1206YD106KAT2A 1206YD155KAT2A 1206YD155MAT2A 1206YD225KAT2A 1206YD225KAT4A 1206YD225MAT2A 1206YD225MAT4A 1206YD475KAT2A 1206YD475MAT2A 1206ZD106KAT2A 1206ZD106KAT4A 1206ZD106MAT2A 1206ZD106MAT4A 1206ZD335KAT2A 1206ZD335MAT2A 1206ZD475KAT2A 1206ZD475KAT4A 1206ZD475MAT2A 12103D106KAT2A 12103D225KAT2A 12103D225MAT2A 12103D475KAT2A 12103D475MAT2A 12106D106KAT2A 12106D106MAT2A 12106D107MAT2A 12106D226KAT2A 12106D226MAT2A 12106D476MAT2A 1210DD225KAT2A 1210DD225MAT2A 18123D106KAT2A 18123D106MAT2A 18126D107MAT2A 18126D476KAT2A 18126D476MAT2A 1210YD106KAT2A 1210YD106MAT2A 1210YD226KAT2A 1210YD475KAT2A 1210YD475MAT2A 1210ZD106KAT1A 1210ZD106KAT2A 1210ZD106KAT4A 1210ZD106MAT2A 1210ZD106MAT4A 1210ZD226KAT2A 1210ZD226KAT4A 1210ZD226MAT2A 1210ZD475KAT2A 1210ZD475MAT2A