KOA SPEER ELECTRONICS, INC.

RK73H

precision 0.5%, 1% tolerance thick film chip resistor

EU RoHS COMPLIANT

features

- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified: 0201 (1H), 0402 (1E), 0603 (1J), 0805 (2A), 1206 (2B), 1210 (2E), 2010 (2H/W2H), 2512 (3A/W3A/W3A2)

dimensions and construction

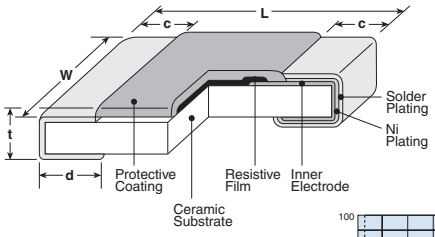

Type* (Inch Size Code)	Dimensions inches (mm) L	W	c	d	t
1F (01005)	.016±.0008 (0.4±0.02)	.008±.0008 (0.2±0.02)	.004±.001 (0.1±0.03)	.004±.001 (0.11±0.03)	.005±.0008 (0.13±0.02)
1H (0201)	.024±.001 (0.6±0.03)	.012±.001 (0.3±0.03)	.004±.002 (0.1±0.05)	.006±.002 (0.15±0.05)	.009±.001 (0.23±0.03)
1E (0402)	.039 +.004 -.002 (1.0 +0.1 -0.05)	.02±.002 (0.5±0.05)	.008±.004 (0.2±0.1)	.01 +.002 -.004 (0.25 +0.05 -0.1)	.014±.002 (0.35±0.05)
1J (0603)	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)
2A (0805)	.079±.008 (2.0±0.2)	.049±.004 (1.25±0.1)	.016±.008 (0.4±0.2)	.012 +.008 -.004 (0.3 +0.2 -0.1)	.02±.004 (0.5±0.1)
2B (1206)	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.02±.012 (0.5±0.3)	.016 +.008 -.004 (0.4 +0.2 -0.1)	.024±.004 (0.6±0.1)
2E (1210)		.102±.008 (2.6±0.2)			
2H (2010)	.197±.008 (5.0±0.2)	.098±.008 (2.5±0.2)			
W2H (2010)				.026±.006 (0.65±0.15)	
3A (2512)	.248±.008 (6.3±0.2)	.122±.008 (3.1±0.2)		.016 +.008 -.004 (0.4 +0.2 -0.1)	
W3A/W3A2 (2512)				.026±.006 (0.65±0.15)	

* Parentheses indicate EIA package size codes.

Derating Curve







For resistors operated at an ambient temperature of 70°C or higher, the power shall be derated in accordance with the above derating curve.

When the terminal part temperature of the resistor exceeds the rated terminal part temperature shown above, the power shall be derated according to the derating curve.

Please refer to "Introduction of the derating curves based on the terminal part temperature" on the beginning of our catalog before use

ordering information

RK73H	2B	T	TD	1003	F
Type	Size	Termination Material	Packaging	Nominal Resistance	Tolerance
	1F 1H 1E 1J 2A 2B 2E W2H W3A 2H 3A W3A2	T: Sn (1F ~ W3A2) Contact factory for below options: L: SnPb (1E, 1J, 2A, 2B, 2E, 2H, 3A) G: Au (1E ~ 2A: 10Ω ~ 1MΩ)	TX: 01005 only: 4mm width - 1mm pitch plastic embossed TBL: 01005 only: 2mm pitch pressed paper TC: 0201 only: 7" 2mm pitch pressed paper (TC: 10,000 pcs/reel, TCM: 15,000 pcs/reel) TPL: 0402 only: 2mm pitch punch paper TP: 0402, 0603, 0805: 7" 2mm pitch punch paper TD: 0603, 0805, 1206, 1210: 7" 4mm pitch punched paper TE: 0805, 1206, 1210, 2010 & 2512: 7" 4mm embossed plastic For further information on packaging, please refer to Appendix A	3 significant figures + 1 multiplier "R" indicates decimal on value <100Ω	D: ±0.5% F: ±1%

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use. 10/19/20

KOA SPEER ELECTRONICS, INC.

RK73H

precision 0.5%, 1% tolerance thick film chip resistor

applications and ratings

Part Designation	Power Rating	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (x10⁻⁶/K)	Resistance Range D±0.5% E-24, E-96	Resistance Range F±1% E-24, E-96*	Maximum Working Voltage	Maximum Overload Voltage	Operating Temperature Range
RK73H1F (01005)	0.03W	70°C	—	±200	—	100kΩ - 2MΩ*	20V	30V	-55°C to +125°C
				±250	—	10Ω - 91kΩ*			
RK73H1H (0201)	0.05W		125°C	±200	10Ω - 1MΩ	10Ω - 10MΩ*	25V	50V	-55°C to +155°C
				±400	—	1.0Ω - 9.1Ω*			
RK73H1E (0402)	0.1W			±100	10Ω - 1MΩ	10Ω - 1MΩ	75V	100V	
				±200	—	1.0Ω - 9.76Ω, 1.02MΩ - 10MΩ			
RK73H1J (0603)	0.1W			±100	1.02kΩ - 1MΩ	1.02kΩ - 1MΩ	75V		
				±200	—	1.02MΩ - 10MΩ			
	0.125W			±100	10Ω - 1kΩ	10Ω - 1kΩ			
				±200	—	1.0Ω - 9.76Ω			
RK73H2A (0805)	0.25W			±100	10Ω - 1MΩ	10Ω - 1MΩ	150V	200V	
				±200	—	1.0Ω - 9.76Ω			
				±400	—	1.02MΩ - 10MΩ			
RK73H2B (1206)	0.25W			±100	10Ω - 1MΩ	10Ω - 1MΩ	200V	400V	
				±200	—	1.0Ω - 9.76Ω, 1.02MΩ - 5.6MΩ			
				±400	—	5.62MΩ - 10MΩ			
RK73H2E (1210)	0.5W			±100	10Ω - 1MΩ	10Ω - 1MΩ			
				±200	—	1.0Ω - 9.76Ω, 1.02MΩ - 5.6MΩ			
				±400	—	5.62MΩ - 10MΩ			
RK73HW2H/2H (2010)	0.75W			±100	10Ω - 1MΩ	10Ω - 1MΩ			
				±200	—	1.0Ω - 9.76Ω, 1.02MΩ - 5.6MΩ			
				±400	—	5.62MΩ - 10MΩ			
RK73HW3A/3A (2512)	1.0W			±100	10Ω - 1MΩ	10Ω - 1MΩ	200V	400V	
				±200	—	1.0Ω - 9.76Ω, 1.02MΩ - 5.6MΩ			
				±400	—	5.62MΩ - 10MΩ			
RK73HW3A2 (2512)	2.0W		95°C	±100	10Ω - 1MΩ	10Ω - 1MΩ	200V	400V	
				±200	—	1.0Ω - 9.76Ω, 1.02MΩ - 5.6MΩ			
				±400	—	5.62MΩ - 10MΩ			

Rated voltage = $\sqrt{\text{Power rating x resistance value}}$ or max. working voltage, whichever is lower

*1F: E-24. 1H: 1.0~9.1, 1M~10MΩ: E-24. If any questions arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves based on the terminal part temperature" in the beginning of the catalog. While using under high power, the temperature of the product may increase depending on the condition of heat dissipation from PCB. Be sure to check the terminal part temperature as well as precautions to use on delivery specification before use.

environmental applications

Temperature Rise

RK73H 1F-1J



RK73H 2A-2E



RK73H W2H-W3A2



Regarding the temperature rise, the value of the temperature varies per conditions and board for use since the temperature is measured under our measuring conditions.

Measurement condition
Room temperature: 25°C
PCB: FR-4t = 1.6mm
Cu foil thickness: 35μm



One-Pulse Limiting Electric Power

RK73H 1F-2A



RK73H 2B-W3A2

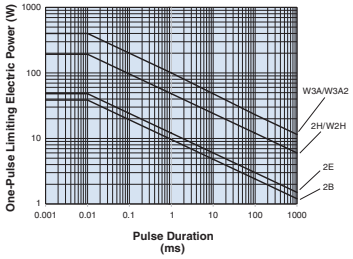

The maximum applicable voltage is equal to the max. overload voltage. Please ask us about the resistance characteristic of continuous applied pulse. The pulse endurance values are not assured values, so be sure to check the products on actual equipment when you use them.

Performance Characteristics

Parameter	Requirement Δ R (%+0.1Ω) Limit	Typical	Test Method
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C
Overload (Short time)	±2%	±1%: 1F; ±0.5%: Another	Rated Voltage x 2.5 for 5 seconds (1E, 2B, W3A2: Rated Voltage x 2 for 5 seconds)
Resistance to Soldering Heat	±1%: 1F ~ W3A2 (10Ω≤R≤1MΩ); ±3%: 1H ~ W3A2 (R<10Ω, R>1MΩ)	±0.5%: 1F ~ W3A2 (10Ω<R<1MΩ); ±1%: 1H ~ W3A2 (R<10Ω, R>1MΩ)	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±1%: 1F; ±0.5% Another	±0.5%: 1F; ±0.3% Another	-55°C (30 minutes), +125°C (30 minutes), 100 cycles
Moisture Resistance	±2%: 1J, 2A, 2B ±3%: Another	±0.75%: 1J, 2A, 2B; ±1.5%:1F, ±1%: Another	40°C ± 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±2%: 1J, 2A, 2B; ±3%: Another	±0.75%: 1J, 2A, 2B; ±1%: Another	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1%	±0.5%: 1F ±0.3%: Another	+125°C, 1000 hours: 1F; +155°C, 1000 hours: 1E, 1H, 1J, 2A, 2B, 2E, 2H/W2H, 3A/W3A/W3A2

10/19/20

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

KOA Speer:

RK73H2ETTD5360F RK73H1ETTP3920F RK73H1JTTD47R5F RK73H2ATTD22R1F RK73H1JTTD1742F
RK73H2BTTE2670F RK73H1ETTP3921F RK73H1ETTP39R2F RK73H2ATTD22R0F RK73H1JTTD1741F
RK73H2ATTE3322F RK73H2HTTE6341F RK73H3ATTE2150F RK73H1JTTD1743F RK73H2ATTE3320F
RK73H1JTTD47R0F RK73H2BTTE2672F RK73H1ETTP3923F RK73H1ETTP39R0F RK73H2ATTD22R6F
RK73H2ATTD2R15F RK73H2BTTD2201F RK73H1ETTP69R8F RK73H2ETTD2323F RK73H2ATTD9091F
RK73H2ATTD2402F RK73H2BTTD2R37F RK73H2ATTD9093F RK73H2BTTD2203F RK73H2ETTD6191F
RK73H2ATTD2400F RK73H2ETTD23R2F RK73H2ETTD2322F RK73H2ATTD9090F RK73H2ETTD6192F
RK73H2ATTD2401F RK73H2BTTD2200F RK73H2ETTD6190F RK73H2BTTD2202F RK73H2ETTD2320F
RK73H2ATTD9092F RK73H2ATTD2403F RK73H2BTTD3093F RK73H2ETTD9092F RK73H2ATTD6191F
RK73H2ATTD2321F RK73H2ATTD23R2F RK73H2ATTD2323F RK73H2ETTD9090F RK73H2ATTD6193F
RK73H1JTTD4021F RK73H1JTTD40R2F RK73H2BTTD3091F RK73H2BTTE6810F RK73H2ATTD6190F
RK73H1JTTD4024F RK73H3ATTE2R67F RK73H2ATTD2320F RK73H2BTTE6811F RK73H2ATTD2324F
RK73H2ETTD9091F RK73H2ATTD6194F RK73H2BTTD3092F RK73H1JTTD4022F RK73H2BTTD3094F
RK73H2ATTD6192F RK73H2BTTD3090F RK73H2ATTD2322F RK73H2BTTE2611F RK73H2BTTD3010F
RK73H2ATTD2R74F RK73H1JTTD1913F RK73H2BTTD3014F RK73H1JTTD2490F RK73H3ATTE3741F
RK73H1ETTP22R6F RK73H1JTTD1911F RK73H2BTTD3012F RK73H1JTTD1910F RK73H2BTTD3013F
RK73H2BTTE2610F RK73H1JTTD2493F RK73H1ETTP22R1F RK73H1JTTD1914F RK73H2BTTD3011F
RK73H1JTTD1912F RK73H1JTTD2491F RK73H2BTTD54R9F RK73H2HTTE6810F RK73H1ETTP6650F
RK73H1ETTP1372F RK73H1ETTP51R1F RK73H2BTTE3R92F RK73H2HTTE3830F RK73H1ETTP1370F
RK73H1ETTP1371F RK73H2HTTE6811F RK73H1ETTP6653F RK73H1ETTP1373F RK73H1ETTP6651F