



REV.	DESCRIPTION	DATE
A	NEW DRAWING	1/30/2006



TOLERANCE:  
#0.3mm UNLESS OTHERWISE  
SPECIFIED

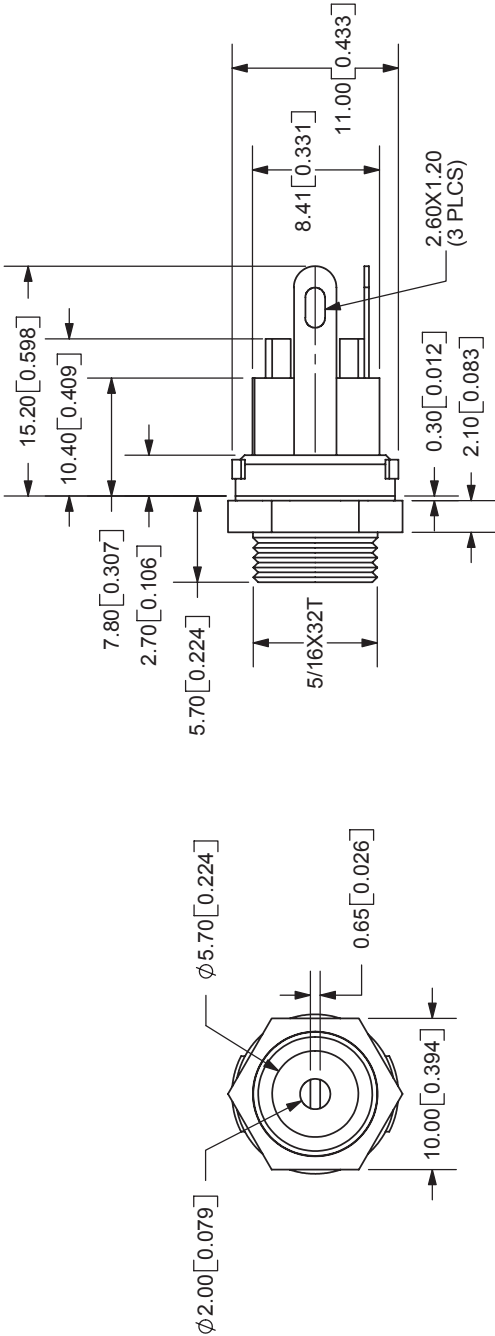

9615 SW Allen Blvd., Ste. 103  
Beaverton, OR 97005  
Phone: 503-643-4899  
800-275-4899  
Fax: 503-372-1266  
Website: www.cui.com

**SPECIFICATIONS:**  
RATING: 16V DC @ 2A  
CONTACT RESISTANCE: 30m OHMS MAX  
INSULATION RESISTANCE: 100M OHMS MIN: 500V DC  
VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE  
LIFE: 5,000 CYCLES  
OPERATING TEMP: -20° ~ +85°C

MODEL NO.	PJ-005A
SCHEMATIC	
CENTER PIN DIAMETER 2.0mm Dia.	
MATERIAL	PLATING
CENTER PIN	Nickel
TERMINAL 1	Silver
TERMINAL 2	Silver
TERMINAL 3	Silver
BUSHING	Nickel
HOUSING	PA66

TITLE: DC POWER JACK	REV: A
PART NO: PJ-005A	UNITS: MM [INCHES]
DRAWN BY: ZRJ	APPROVED BY:
	SCALE: 2:1