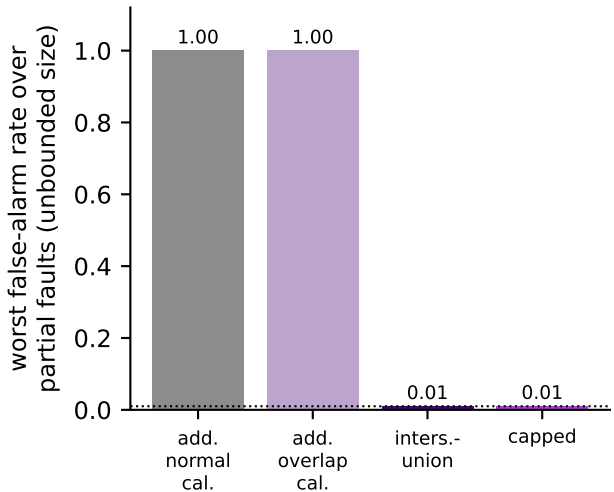
Validity (budget 1%, dotted)
worst false-alarm rate over partial faults (unbounded size)
1.00
1.00
0.01
0.01
0.0
0.2
0.4
0.6
0.8
1.0
add. normal cal.
add. overlap cal.
inters.-union
capped

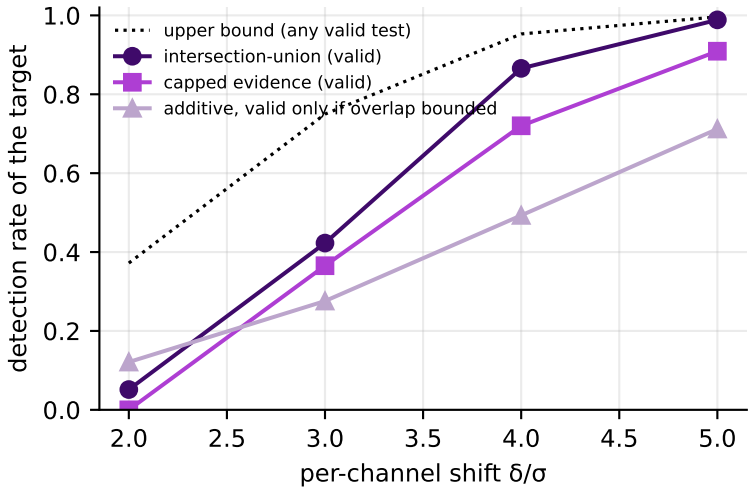
Power (k = 3)
upper bound (any valid test)
intersection-union (valid)
capped evidence (valid)
additive, valid only if overlap bounded
detection rate of the target
0.0
0.2
0.4
0.6
0.8
1.0
2.0
2.5
3.0
3.5
4.0
4.5
5.0
per-channel shift δ/σ