
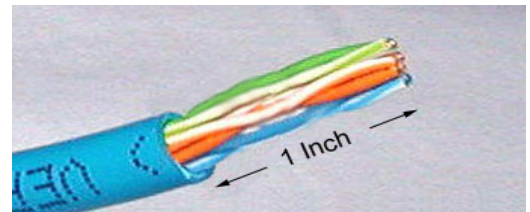
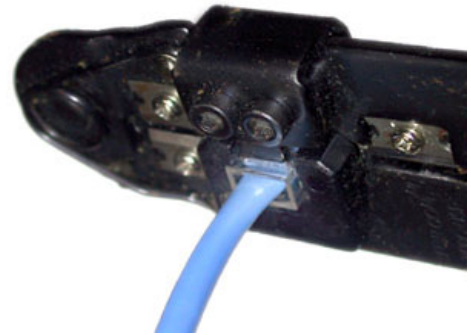


Required components:

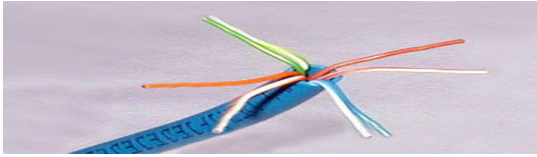

5) Connect the cable to switch and from switch to the machine. Thus it forms STAR Topology.

6) Assign IP address
ping from one machine
message is displayed.

to machine 1,2,3 and machine 4 and
to other machine. Following



P:F-LTL-UG/03/R1