



Model: WT111RJ

APPLICATIONS:



Designed for Audio device not to be spoiled by lightning over-voltage, induced over-voltage and static discharge.


- Telephone, Fax,
- ISDN, DDN, DSL
- Broadcast system

FEATURES:

- Multi. Protection circuits, Gas-Tube+ TVS technology
- Dual protection in Common module and different module
- Multi-Strike Capability

TECHNICAL PARAMETER :

Model	WT111RJ
Electrical Parameter	
Max. continuous operating voltage U_c	110V
DC spark-over voltage	$150V \pm 20\%$
Nominal discharge current (8/20 μ s) I_n	10kA
Max. discharge current (8/20 μ s) I_{max}	15kA
Limiting voltage (10/700 μ s) U_p	500V
Adapt transmission rate V_s	100Mbps
Insertion loss A_e	0.5dB
Protection line	3/4
Response time T_a	100ns
Interface form	RJ11
Protection line	2
Protection port	1
Mechanical characteristics	
Dimension	54(L) \times 25(W) \times 25(H)mm
Weight per unit	50g
IP Code	IP20

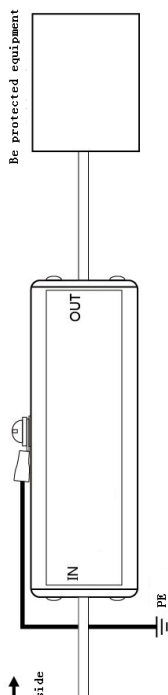


Working conditions

Temperature: -40 to 85°C,

Relative humidity: $\leq 95\%$

Standards compliance

IEC61643-1, RoHS

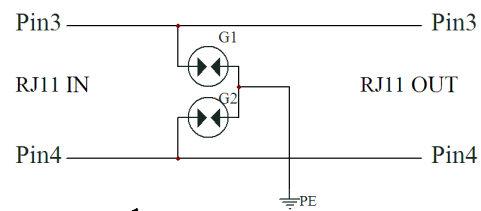

WELLTECH ENTERPRISES

415 Ground Floor, PRAKASH MOHALLA, GARHI, EAST OF KAILASH
NEW DELHI 110065

Phone +91 9871650366 Email : sales@welltechenterprises.in