


PLC Splitter

Mini Type PLC Splitter

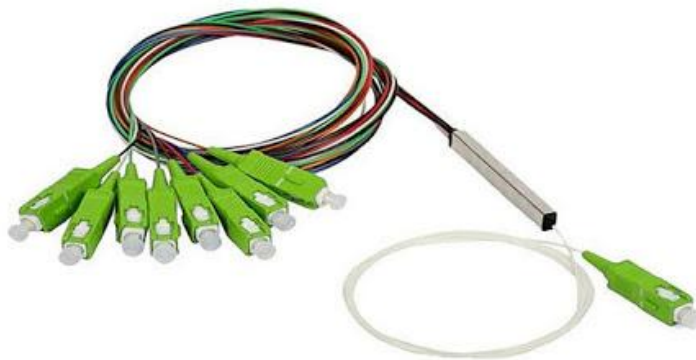

DESCRIPTION

Welltech Enterprises PLC splitter is based on silicon dioxide waveguides, which is used to connect main equipment and terminal equipment in EPON, BPON and GPON network.

FEATURES

- Qualified with CE certificate and ROHS certificate.
- Comply with GR-1209-CORE, GR-1221-CORE, YD/T 2000.1-2014 and IEC criterion.

WELLTECH ENTERPRISES

415 Ground Floor, PRAKASH MOHALLA, GARHI , EAST OF KAILASH
NEW DELHI 110065
Phone +91 9871650366 Email : sales@welltechenterprises



HOUSING SIZE AND RIBBION:

T 3.1 Mini PLC splitter housing size and ribbon

	nx2, nx4, nx8		1x16	2x16, nx32	nx64	Tube type
L(mm)	55	60	60	80	100	Diameter: $\Phi 0.9$ mm or customized
W(mm)	7	7	12	20	40	Material: Hytrel, LSZH or customized
H(mm)	4	4	4	6	6	Color: blue, orange, green, brown, grey, white, red, black, or customized

OPTICAL PARAMETER:

T4.1 1×N (N≥2)PLC splitter optical parameter

Parameter	1X2	1x4	1x8	1x16	1x32	1x64
Wavelength (nm)	1260 ~ 1650					
IL (dB)	≤4.1	≤7.4	≤10.5	≤13.8	≤17.1	≤20.4
Uniformity (dB)	≤0.6	≤0.7	≤0.8	≤1.0	≤1.5	≤2.0
RL (dB)	≥50(PC); ≥55(APC)					
PDL (dB)	≤0.15	≤0.2	≤0.2	≤0.3	≤0.3	≤0.3
Directivity (dB)	≥55	≥55	≥55	≥55	≥55	≥55
Operating temp(°C)	-40~85°C					

WELLTECH ENTERPRISES

415 Ground Floor, PRAKASH MOHALLA, GARHI , EAST OF KAILASH
NEW DELHI 110065

Phone +91 9871650366 Email : sales@welltechenterprises



Environ ment	Storage temp(°C)	-40~85°C
	Humidity	≤95% (+40°C)
	Atmospheric pressure	62~106kPa
Fiber		SM G657A or customized
Connector		SC, FC, LC
Pigtail (mm)		1000, 1500, 2000 or customized

T4.2 2×N (N≥2) PLC splitter optical parameter

Parameter	2X2	2x4	2x8	2x16	2x32	2x64
Wavelength (nm)	1260 ~ 1650					
IL (dB)	≤4.4	≤7.7	≤10.8	≤14.1	≤17.4	≤20.7
Uniformity (dB)	≤0.8	≤1.0	≤1.0	≤1.5	≤1.8	≤2.0
RL (dB)	≥50(PC); ≥55(APC)					
PDL (dB)	≤0.2	≤0.2	≤0.3	≤0.3	≤0.3	≤0.4
Directivity (dB)	≥55	≥55	≥55	≥55	≥55	≥55

WELLTECH ENTERPRISES

415 Ground Floor, PRAKASH MOHALLA, GARHI , EAST OF KAILASH
NEW DELHI 110065
Phone +91 9871650366 Email : sales@welltechenterprises



Environ ment	Operating temp(°C)	-40~85°C
	Storage temp(°C)	-40~85°C
	Humidity	≤95% (+40°C)
	Atmospheric pressure	62~106kPa
Fiber		SM G657A or customized
Connector		SC, FC, LC
Pigtail (mm)		1000, 1500, 2000 or customized

WELLTECH ENTERPRISES

415 Ground Floor, PRAKASH MOHALLA, GARHI , EAST OF KAILASH
NEW DELHI 110065
Phone +91 9871650366 Email : sales@welltechenterprises