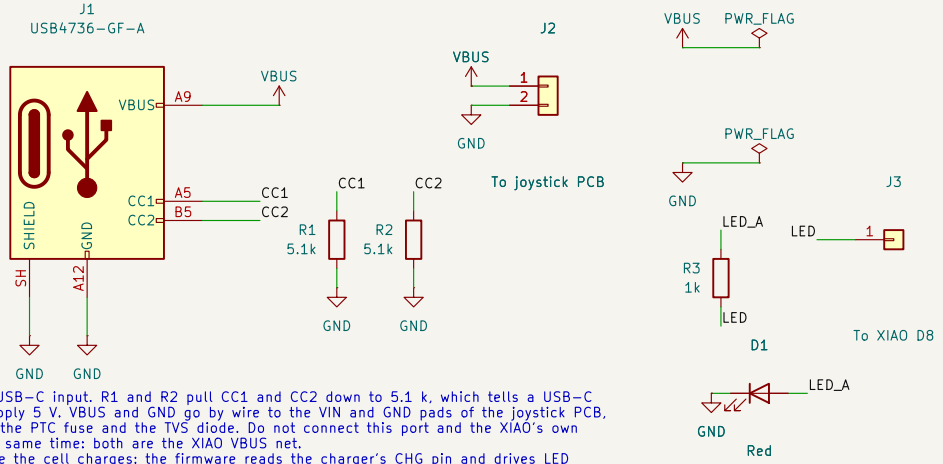


Charge-only USB-C input. R1 and R2 pull CC1 and CC2 down to 5.1 k, which tells a USB-C charger to supply 5 V. VBUS and GND go by wire to the VIN and GND pads of the joystick PCB, which carries the PTC fuse and the TVS diode. Do not connect this port and the XIAO's own USB-C at the same time: both are the XIAO VBUS net.
D1 lights while the cell charges: the firmware reads the charger's CHG pin and drives LED from a XIAO GPIO (D8) through J3.

GCT USB4736 charge-only receptacle with 5.1 k CC pull-downs, and the charge LED

Sheet: /
File: usbc.kicad_sch

Title: Open Rally Remote – USB-C charging PCB

Size: A5	Date: 2026-10-12	**Rev: V0.24**
KiCad E.D.A. 10.0.6		Id: 1/1