






PHOENIX+™ Synthetic Polymer

Our quest to produce the most durable plastic-based matrix possible incorporates our research into new raw materials and adhesives. This is a non-compromising solution to your creasing needs, designed to withstand the demands of extended production runs.



- ✓ **New High Quality Adhesive:** Bespoke clean-peel tape eliminates creeping on the platen. Leaves no residue, requiring no clean-up.
- ✓ **Specially Designed Locators:** Small in size to fit tight areas. Thermally bonded—no adhesives. Self-locates securely.
- ✓ **High Impact Plastic:** The very latest in virgin polymer technology prevents channel wall collapse under pressure.
- ✓ **Ultra-Smooth Shoulders:** Perfect sheet transfer. Eliminates reworking of matrix shoulders on high speed machinery.
- ✓ **Dual-Surface Colour Coding:** Printed on both the base and locator for instant, error-free operator identification.

7MM MINI CENTRE  28 STRIPS X 750MM = 21M	
	
HEIGHT (B)	CHANNEL WIDTHS (A)
 0.30	0.5, 0.6, 0.8, 0.9, 1.0, 1.1, 1.2, 1.3, 1.4, 1.5, 1.6, 1.7, 1.8, 1.9
 0.40	0.5, 0.6, 0.8, 0.9, 1.0, 1.1, 1.2, 1.3, 1.4, 1.5, 1.6, 1.7, 1.8, 1.9
	0.5, 0.6, 0.8, 0.9, 1.0, 1.1, 1.2, 1.3, 1.4, 1.5, 1.6, 1.7, 1.8, 1.9

7MM OFF-CENTRE  28 STRIPS X 750MM = 21M	
	
HEIGHT (B)	CHANNEL WIDTHS (A)
 0.30	0.5, 0.6, 0.8, 0.9, 1.0, 1.1, 1.2, 1.3, 1.4, 1.5, 1.6, 1.7, 1.8, 1.9
 0.40	0.5, 0.6, 0.8, 0.9, 1.0, 1.1, 1.2, 1.3, 1.4, 1.5, 1.6, 1.7, 1.8, 1.9
	0.5, 0.6, 0.8, 0.9, 1.0, 1.1, 1.2, 1.3, 1.4, 1.5, 1.6, 1.7, 1.8, 1.9

 0.45	0.8, 0.9, 1.0, 1.1, 1.2, 1.3, 1.4, 1.5, 1.6, 1.7, 1.8, 1.9
 0.50	0.8, 0.9, 1.0, 1.1, 1.2, 1.3, 1.4, 1.5, 1.6, 1.7, 1.9, 2.1, 2.3
 0.55	0.8, 0.9, 1.0, 1.1, 1.2, 1.3, 1.4, 1.5, 1.6, 1.7, 1.9, 2.1, 2.3
 0.60	1.2, 1.3, 1.4, 1.5, 1.6, 1.7, 1.9, 2.1
 0.70	1.5, 1.6, 1.7, 1.9, 2.1


 0.45	0.8, 0.9, 1.0, 1.1, 1.2, 1.3, 1.4, 1.5, 1.6, 1.7, 1.8, 1.9
 0.50	0.8, 0.9, 1.0, 1.1, 1.2, 1.3, 1.4, 1.5, 1.6, 1.7, 1.9, 2.1, 2.3
 0.55	0.8, 0.9, 1.0, 1.1, 1.2, 1.3, 1.4, 1.5, 1.6, 1.7, 1.9, 2.1, 2.3
 0.60	1.2, 1.3, 1.4, 1.5, 1.6, 1.7, 1.9, 2.1, 2.3, 2.5
 0.65	1.5, 1.6, 1.7, 1.9, 2.1, 2.3, 2.5
 0.70	1.5, 1.6, 1.7, 1.9, 2.1, 2.3, 2.5

10MM STANDARD CENTRE SIZES		 32 STRIPS X 750MM = 24M	
a (Width) b			
 0.30	0.5, 0.6, 0.8, 0.9, 1.0, 1.1, 1.2, 1.3, 1.4, 1.5, 1.6, 1.7, 1.8, 1.9	 0.40	0.5, 0.6, 0.8, 0.9, 1.0, 1.1, 1.2, 1.3, 1.4, 1.5, 1.6, 1.7, 1.8, 1.9
 0.45	0.8, 0.9, 1.0, 1.1, 1.2, 1.3, 1.4, 1.5, 1.6, 1.7, 1.8, 1.9	 0.50	0.8, 0.9, 1.0, 1.1, 1.2, 1.3, 1.4, 1.5, 1.6, 1.7, 1.9, 2.1, 2.3
 0.55	0.8, 0.9, 1.0, 1.1, 1.2, 1.3, 1.4, 1.5, 1.6, 1.7, 1.9, 2.1, 2.3	 0.60	1.2, 1.3, 1.4, 1.5, 1.6, 1.7, 1.9, 2.1, 2.3, 2.5, 2.7, 2.8, 3.0, 3.2
 0.65	1.5, 1.6, 1.7, 1.9, 2.1, 2.3, 2.5, 2.7, 2.8, 3.0, 3.2	 0.70	1.5, 1.6, 1.7, 1.9, 2.1, 2.3, 2.5, 2.7, 2.8, 3.0, 3.2
 0.80	1.5, 1.6, 1.7, 1.9, 2.1, 2.3, 2.5, 2.7, 2.8, 3.0, 3.2	 1.00	2.3, 2.5, 2.7, 2.8, 3.0, 3.2



TECHNICAL SPECS

PRECISION CONSUMABLES PORTFOLIO

PHOENIX 12MM CENTRE		27 STRIPS = 20.25M
		
HEIGHT (B)	CHANNEL WIDTHS (A)	
 0.60	3.5*, 4.0# and 4.5#	
 0.65	3.5*, 4.0# and 4.5#	
 0.70	3.5*, 4.0#, 4.5# and 5.0#	
 0.80	3.5*, 4.0#, 4.5# and 5.0#	




PHOENIX 12MM DOUBLE CREASE  24 STRIPS = 18M	
	
HEIGHT	CHANNEL WIDTH (A)
Rule Gaps (d) available: 3.0, 4.0, 5.0mm	
 0.40	1.0, 1.3, 1.5
 0.45	1.0, 1.3, 1.5
 0.50	1.0, 1.3, 1.5

0.80	3.5, 4.0#, 4.5# and 5.0#
1.00	3.5*, 4.0#, 4.5# and 5.0#
1.20	3.5*, 4.0#, 4.5# and 5.0#
1.50	3.5*, 4.0#, 4.5# and 5.0#
* 3.5mm: 20.25m # 4.0–5.0mm: 20 strips = 15m	

0.50	1.0, 1.5, 1.9
------	---------------

PHOENIX XL™ Wide Base

Designed to meet the ever-increasing demands of high-volume production runs on solid board and flute. Phoenix XL minimises machinery downtime with an extended flange for maximum stability.



- ✓ **No Lead Edge Taping Required:** Secure, reliable performance straight out of the box with zero matrix shift.
- ✓ **Choice of Base Size:** Available in 12mm or 15mm extra-wide bases to distribute aggressive platen pressure.
- ✓ **High-Impact Polymer:** Unmatched durability for the heaviest, most abrasive substrates.
- ✓ **Clean-Peel Tape:** Extreme friction lock during runs, zero cleanup required upon removal.

PHOENIX XL 12MM STANDARD 32 STRIPS = 24M	
HEIGHT (B)	CHANNEL WIDTHS (A)
0.40	1.3, 1.4, 1.5, 1.6, 1.7
0.50	1.3, 1.4, 1.5, 1.6, 1.7, 1.9
0.60	1.5, 1.6, 1.7, 1.9, 2.1, 2.3, 2.5, 2.7, 3.0, 3.2
0.70	2.1, 2.3, 2.5, 2.7, 3.0, 3.2
0.80	2.1, 2.3, 2.5, 2.7, 3.0, 3.2

PHOENIX XL 15MM EXTRA-WIDE 27 STRIPS = 20.25M	
HEIGHT (B)	CHANNEL WIDTHS (A)
0.60	3.5*, 4.0#, 4.5#, 5.0#
0.70	3.5*, 4.0#, 4.5#, 5.0#
0.80	3.5*, 4.0#, 4.5#, 5.0#
1.00	3.5*, 4.0#, 4.5#, 5.0#





TECHNICAL SPECS

PRECISION CONSUMABLES PORTFOLIO

ULTRA-SR™ 100 Mic Mylar Film

A high impact polyester base product the same thickness as steel based matrix and fully compatible with any steel based product on the market. Engineered for abrasive recycled boards.



- ✓ **No Rusting or Perforation Marks:** Clean converting on sensitive substrates.
- ✓ **Extreme Durability:** Special High Impact Plastic providing stability comparable to steel.
- ✓ **Full Visual Coding:** Both base and locator have sizes printed on for easy identification.
- ✓ **Important Technical Note:** An allowance of 0.20 must be considered the same as all other steel based products.

ULTRA SR 7MM CENTRE 32 STRIPS = 24M

HEIGHT (MM)	CHANNEL (MM)	PT
 0.38	0.5	2-3pt
 0.38	0.8	2-3pt

ULTRA SR 7MM OFF-CENTRE 24M

HEIGHT (MM)	CHANNEL (MM)	PT
 0.38	0.8	2-3pt
 0.38	1.0	2-3pt

 0.38	1.0	2-3pt
 0.38	1.2	2-3pt
 0.45	1.3	2-3pt
 0.45	1.4	2-3pt
 0.45	1.5	2-3pt
 0.50	1.6	2-3pt
 0.50	1.7	2-3pt
 0.55	1.9	2-3pt
 0.60	2.0	2-3pt
 0.60	2.1	2-3pt
 0.70	2.3	2-3pt
 0.70	2.4	2-3pt
 0.80	2.6	2-3pt
 0.90	3.0	3-4pt

 0.38	1.2	2-3pt
 0.45	1.3	2-3pt
 0.45	1.4	2-3pt
 0.45	1.5	2-3pt
 0.50	1.6	2-3pt
 0.50	1.7	2-3pt

ULTRA SR 12MM CENTRE 		
HEIGHT (MM)	CHANNEL	PT
 1.30	3.80	3-4/4-6pt
 1.50	5.00	3-4/4-6pt
 1.70	6.00	3-4/4-6pt

ULTRA SR 12MM DOUBLE 	
HEIGHT	CHANNEL
 0.38	1.0 (D3,D4,D5)
 0.45	1.3 (D3,D4,D5)
 0.50	1.6 (D3,D4,D5)
Rule gaps: 3.00, 4.00, 5.00mm	





TECHNICAL SPECS

PRECISION CONSUMABLES PORTFOLIO

EXCEED™ RUBBER Micro-Cellular Ejection

Exceed rubber comes from a combined experience of over 40 years of design and production of profile extrusion. Maintaining its exact profile for over 1.6 million impressions, it provides a highly cost-effective solution.



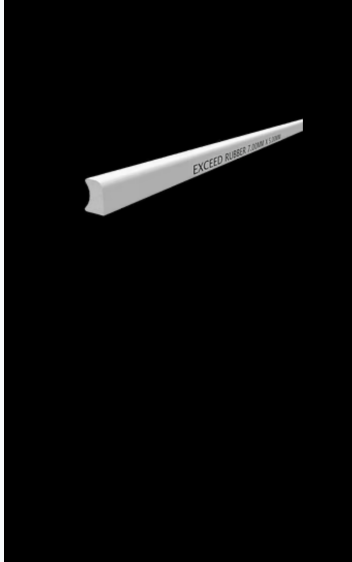

- ✓ **Zero Degradation:** Higher running life with absolutely no reduction in performance after 1.6 million+ impressions.
- ✓ **Eliminates Angel Hair:** Flawless sheet breakaway from the cutting rule.
- ✓ **Resilient Formulation:** Excellent UV resistance and high resistance to heat generated from press friction.
- ✓ **Faster Setup:** Highly dimensionally stable for greatly reduced make-ready time.

EXCEED 5.00MM WIDTH

HEIGHT (A)	WIDTH (B)	COLOUR	BOX YIELD
7.00mm	5.00mm	White	24m (32x750mm)
7.00mm	5.00mm	White	60m (80x750mm)
7.25mm	5.00mm	White	24m (32x750mm)
7.25mm	5.00mm	White	60m (80x750mm)

EXCEED 7.50MM WIDTH

HEIGHT (A)	WIDTH (B)	COLOUR	BOX YIELD
7.00mm	7.50mm	White	24m (32x750mm)
7.00mm	7.50mm	White	60m (80x750mm)
7.25mm	7.50mm	White	24m (32x750mm)
7.25mm	7.50mm	White	60m (80x750mm)

WORKSHOP ACCESSORIES

SUPER SHIM PLUS TAPE

Made from hardened stainless steel which will not compress. 8.0mm wide using a 12mm finger-lift backing for quick use.

THICKNESS RANGE	ROLL SPEC
0.03mm (30 microns)	8mm x 10m roll
0.05mm (50 microns)	8mm x 10m roll
0.10mm (100 microns)	8mm x 10m roll

PROFITAPE

Self-adhesive precise patching make-ready tape. Super translucent, extreme hardness, no moistening necessary.

COLOUR CODE	W X THICKNESS X L	ROLLS/PACK
 Blue	3mm/6mm x 30µ x 35m	40 / 25
 Red	3mm/6mm x 50µ x 25m	40 / 25
 Yellow	3mm/6mm x 80µ x 18m	40 / 25
12mm and 20mm widths available on request.		