



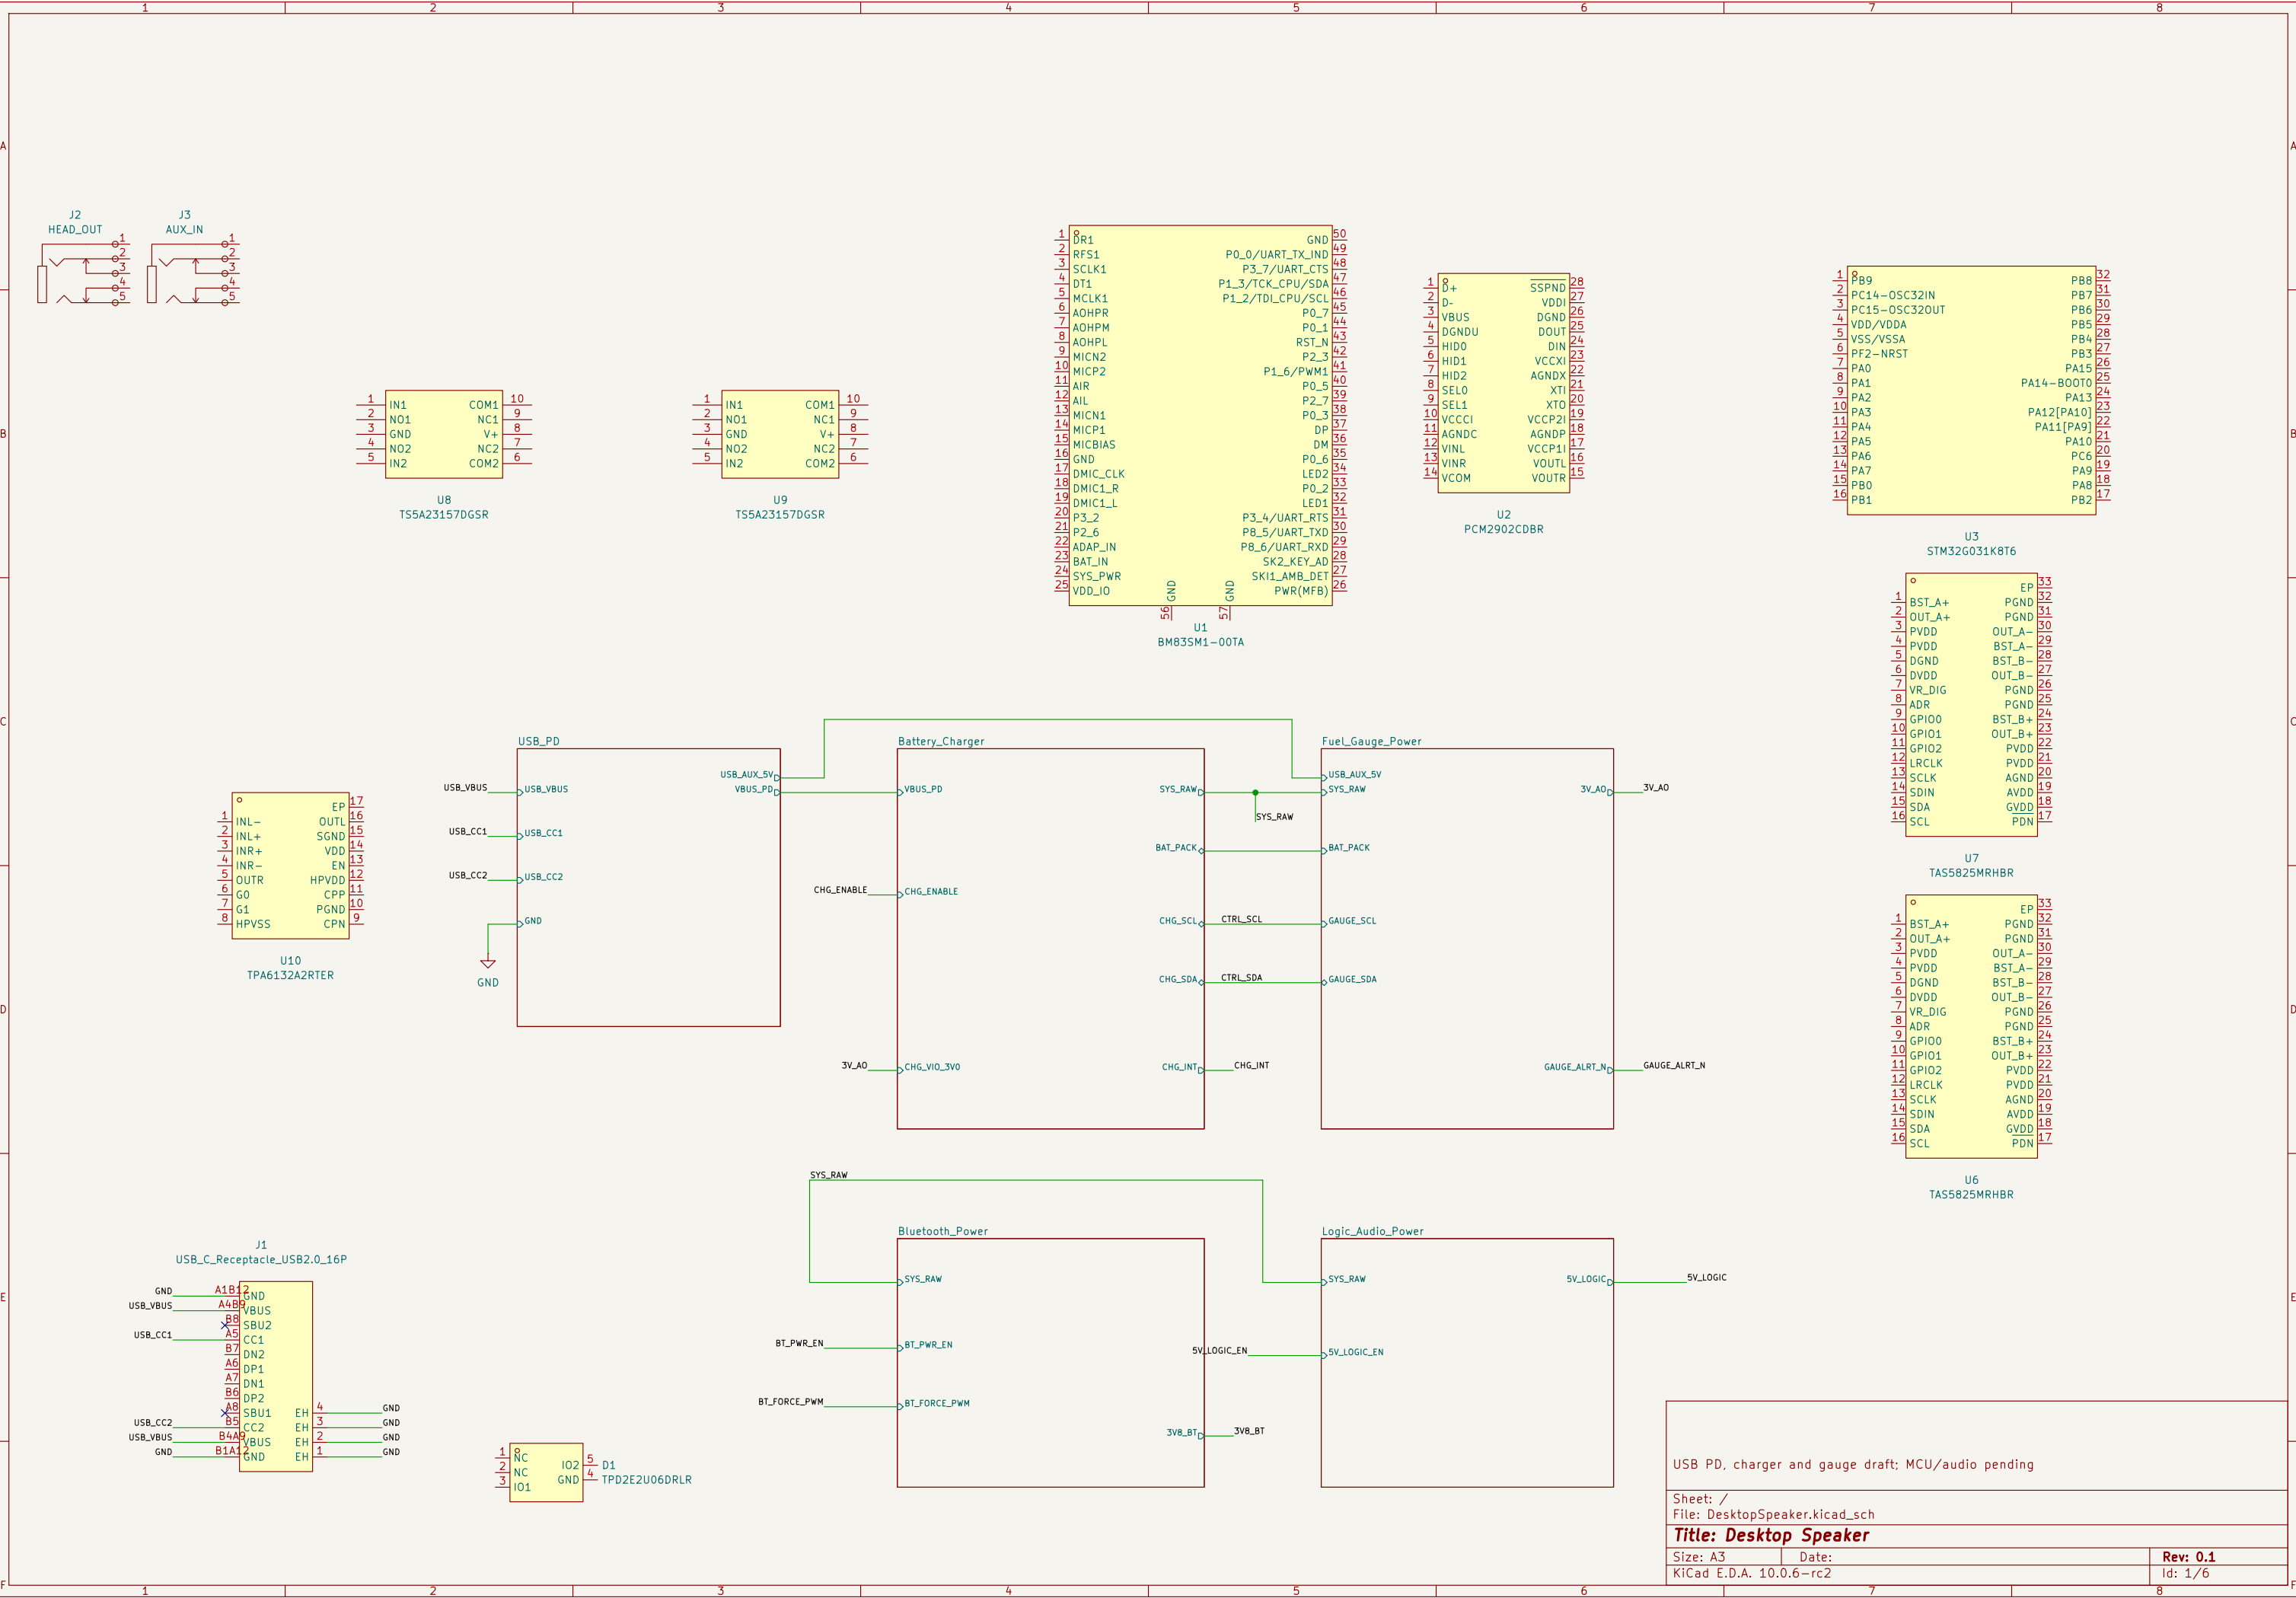

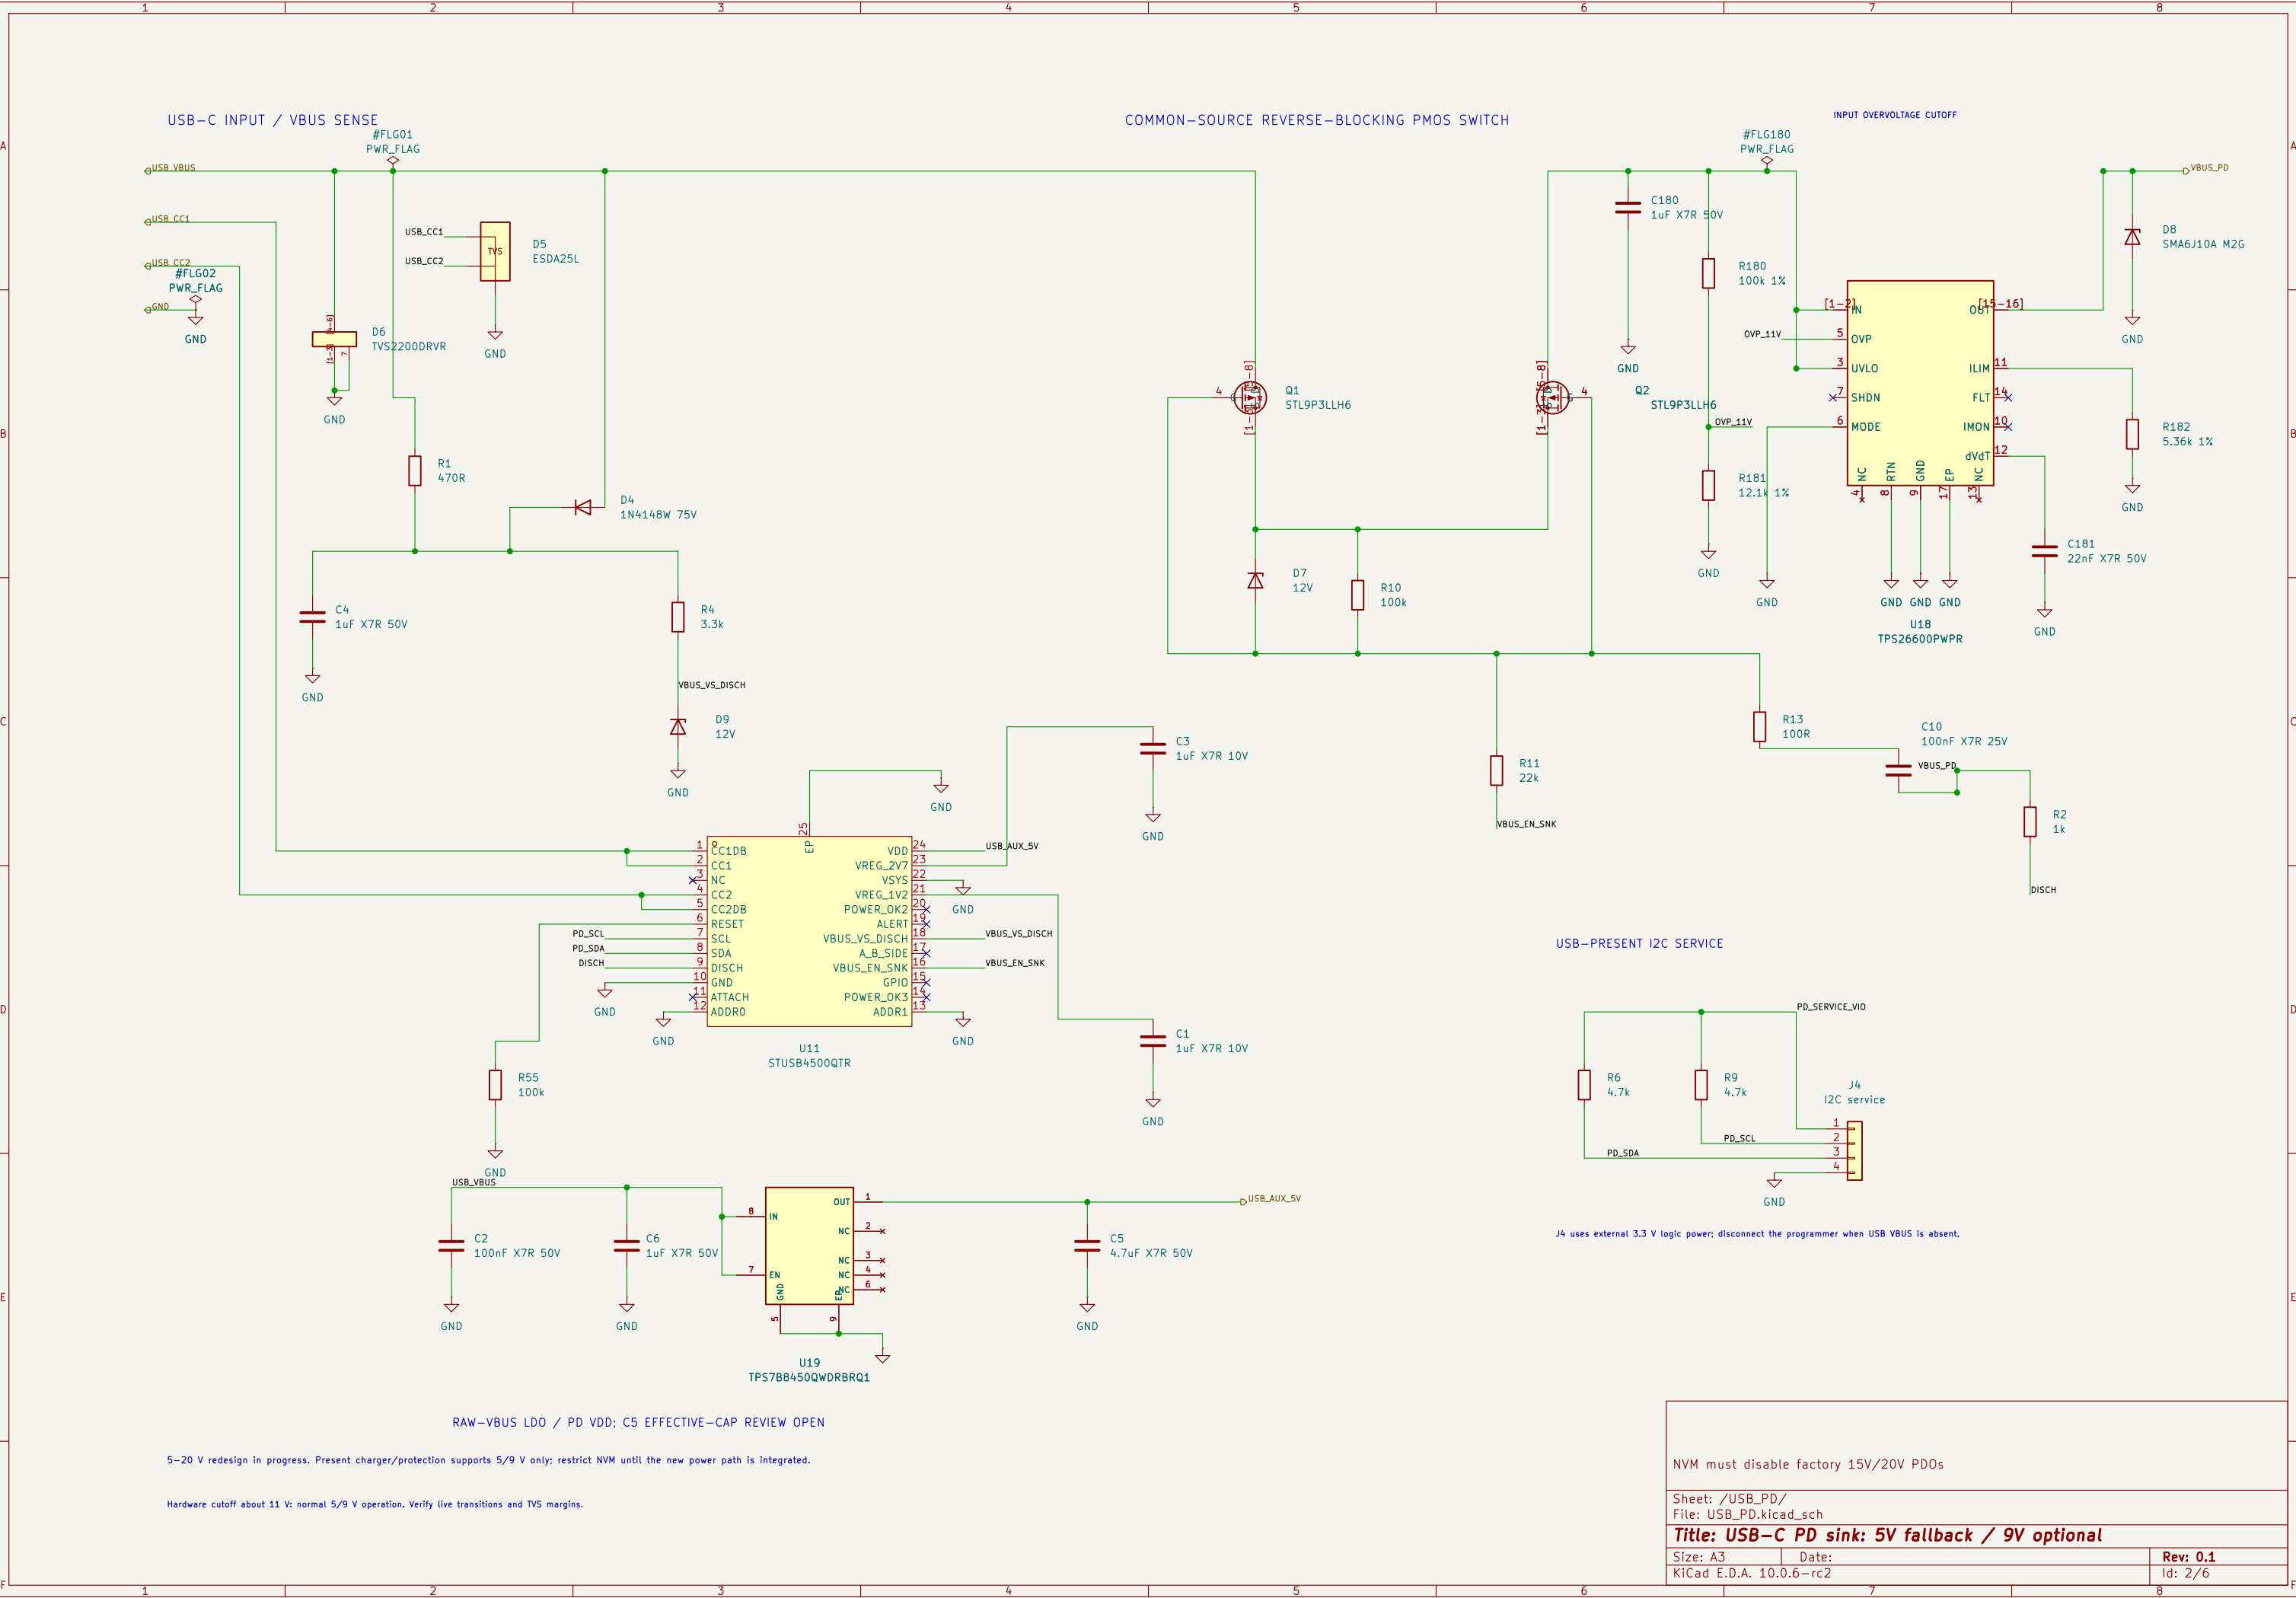

USB-C INPUT / VBUS SENSE

COMMON-SOURCE REVERSE-BLOCKING PMOS SWITCH

INPUT OVERVOLTAGE CUTOFF

RAW-VBUS LDO / PD VDD: C5 EFFECTIVE-CAP REVIEW OPEN

USB-PRESENT I2C SERVICE

5-20 V redesign in progress. Present charger/protection supports 5/9 V only; restrict NVM until the new power path is integrated.

Hardware cutoff about 11 V; normal 5/9 V operation. Verify live transitions and TVS margins.

NVM must disable factory 15V/20V PD0s

Sheet: /USB_PD/
File: USB_PD.kicad_sch

Title: USB-C PD sink: 5V fallback / 9V optional


Size: A3	Date:	Rev: 0.1
KiCad E.D.A. 10.0.6-rc2		Id: 2/6

Charge disabled until MCU validates pack/source and sets IINLIM, VREG, ICHG, watchdog.

D+/D- unused; disable AUTO_DPDM. SYS_RAW is not a regulated 5 V rail.

QON wake: hold SW100 ≥ 2.3 s; USB insertion also exits ship mode.

VBUS 3.9–14 V; PMID 8.2uF suggested (OTG unused)

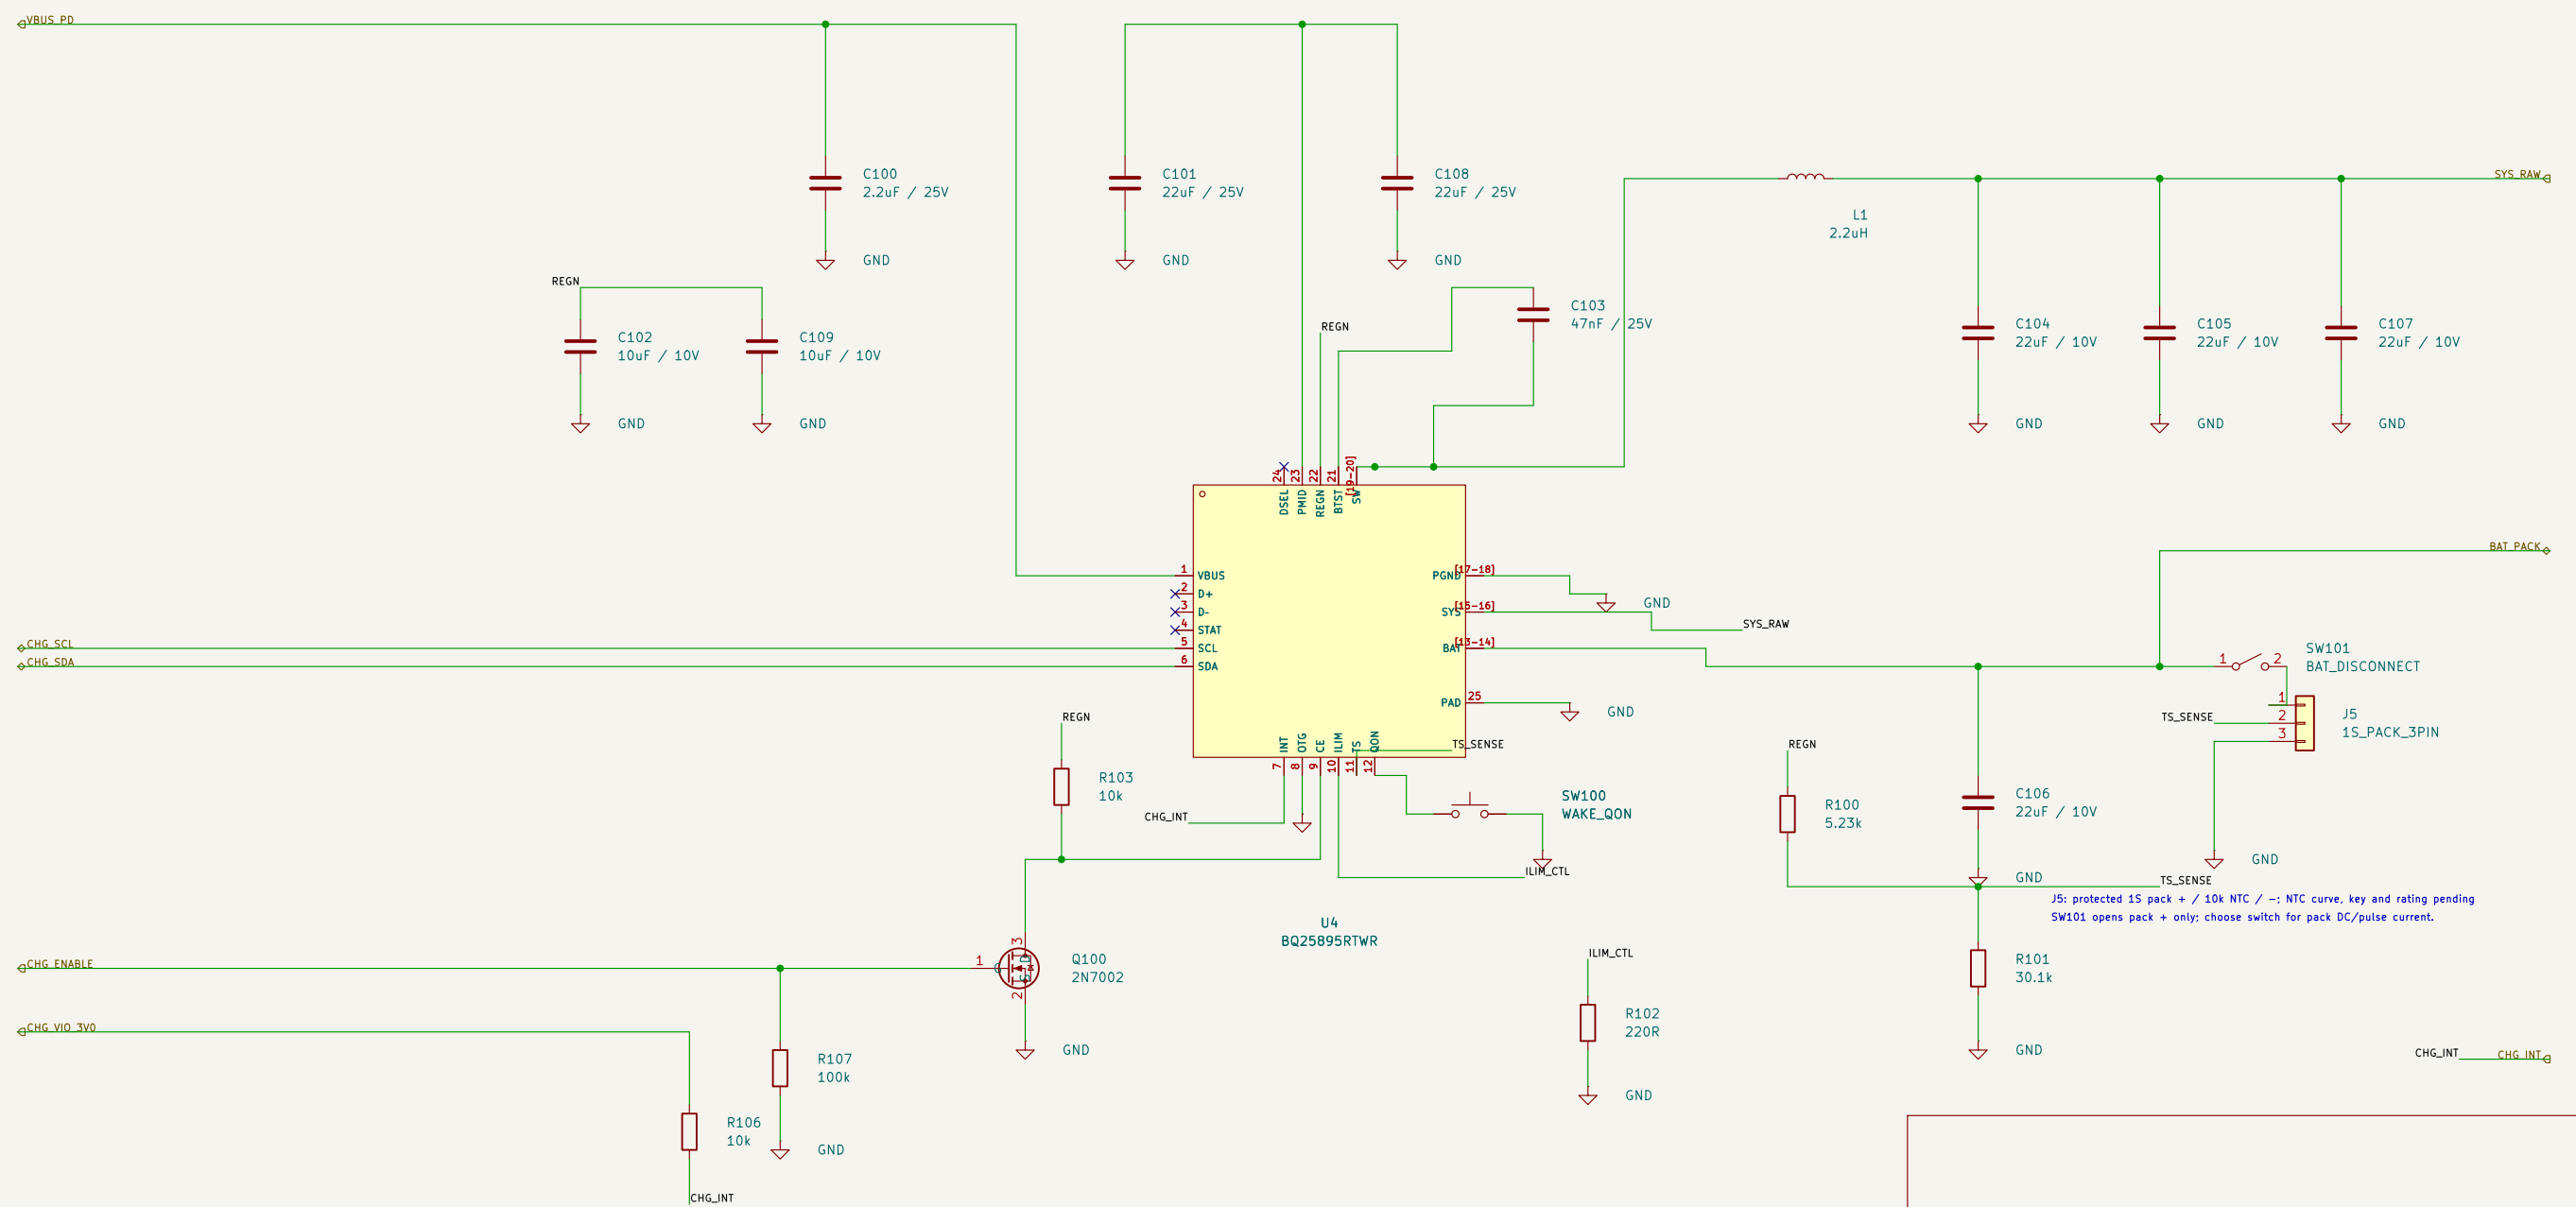

Sheet: /Battery_Charger/
File: Battery_Charger.kicad_sch

Title: BQ25895 charger and 1S battery power path


Size: A3

Date:

Rev: 0.1

Size: A5	Date:
KiCad E.D.A. 10.0.6-rc2	

Id: 3/6

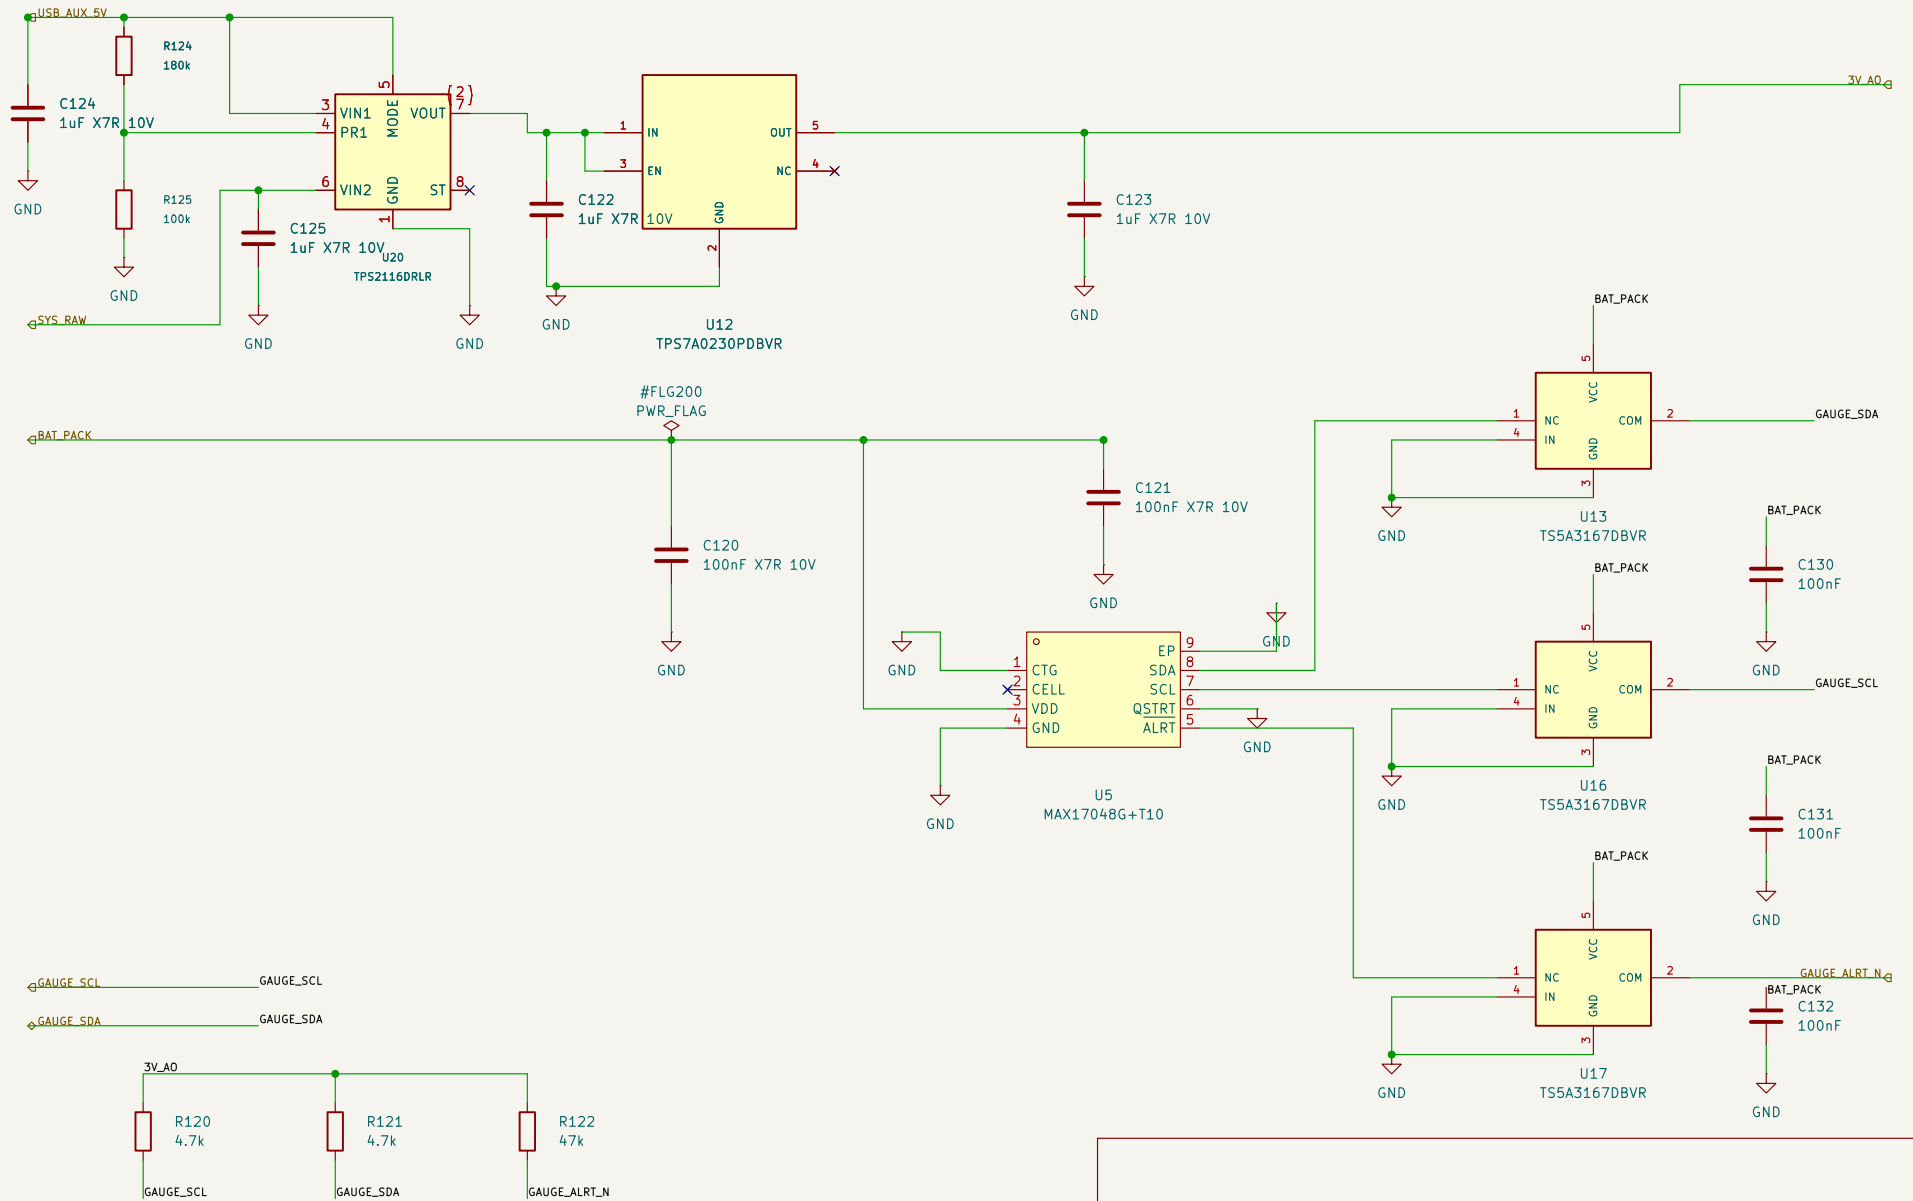

USB-priority logic supply; PR1 nominal 2.8 V.
Switchover/BOR and effective capacitance need qualification.

CELL pad 2 unused on MAX17048; QSTRT tied low

Gauge isolation: 3 active-low BAT-powered switches; OFF when BAT absent

Sheet: /FuelGauge_Power/
File: FuelGauge_Power.kicad_sch

Title: Fuel gauge and low-current power

Size: A4
KiCad E.D.A. 10.0.6-rc2

Date:

Rev: 0.1

Id: 4/6

Protected 1S SYS to switched 5 V; reserve 500 mA total. Codec and other 5 V loads connect later.

EN low = true input/output disconnect; MODE tied to SYS_RAW forces PWM after soft-start.

Steady PWM divider DC bound is within PCM2902C limits; soft-start uses PFM. Ripple and startup transient require qualification.

