



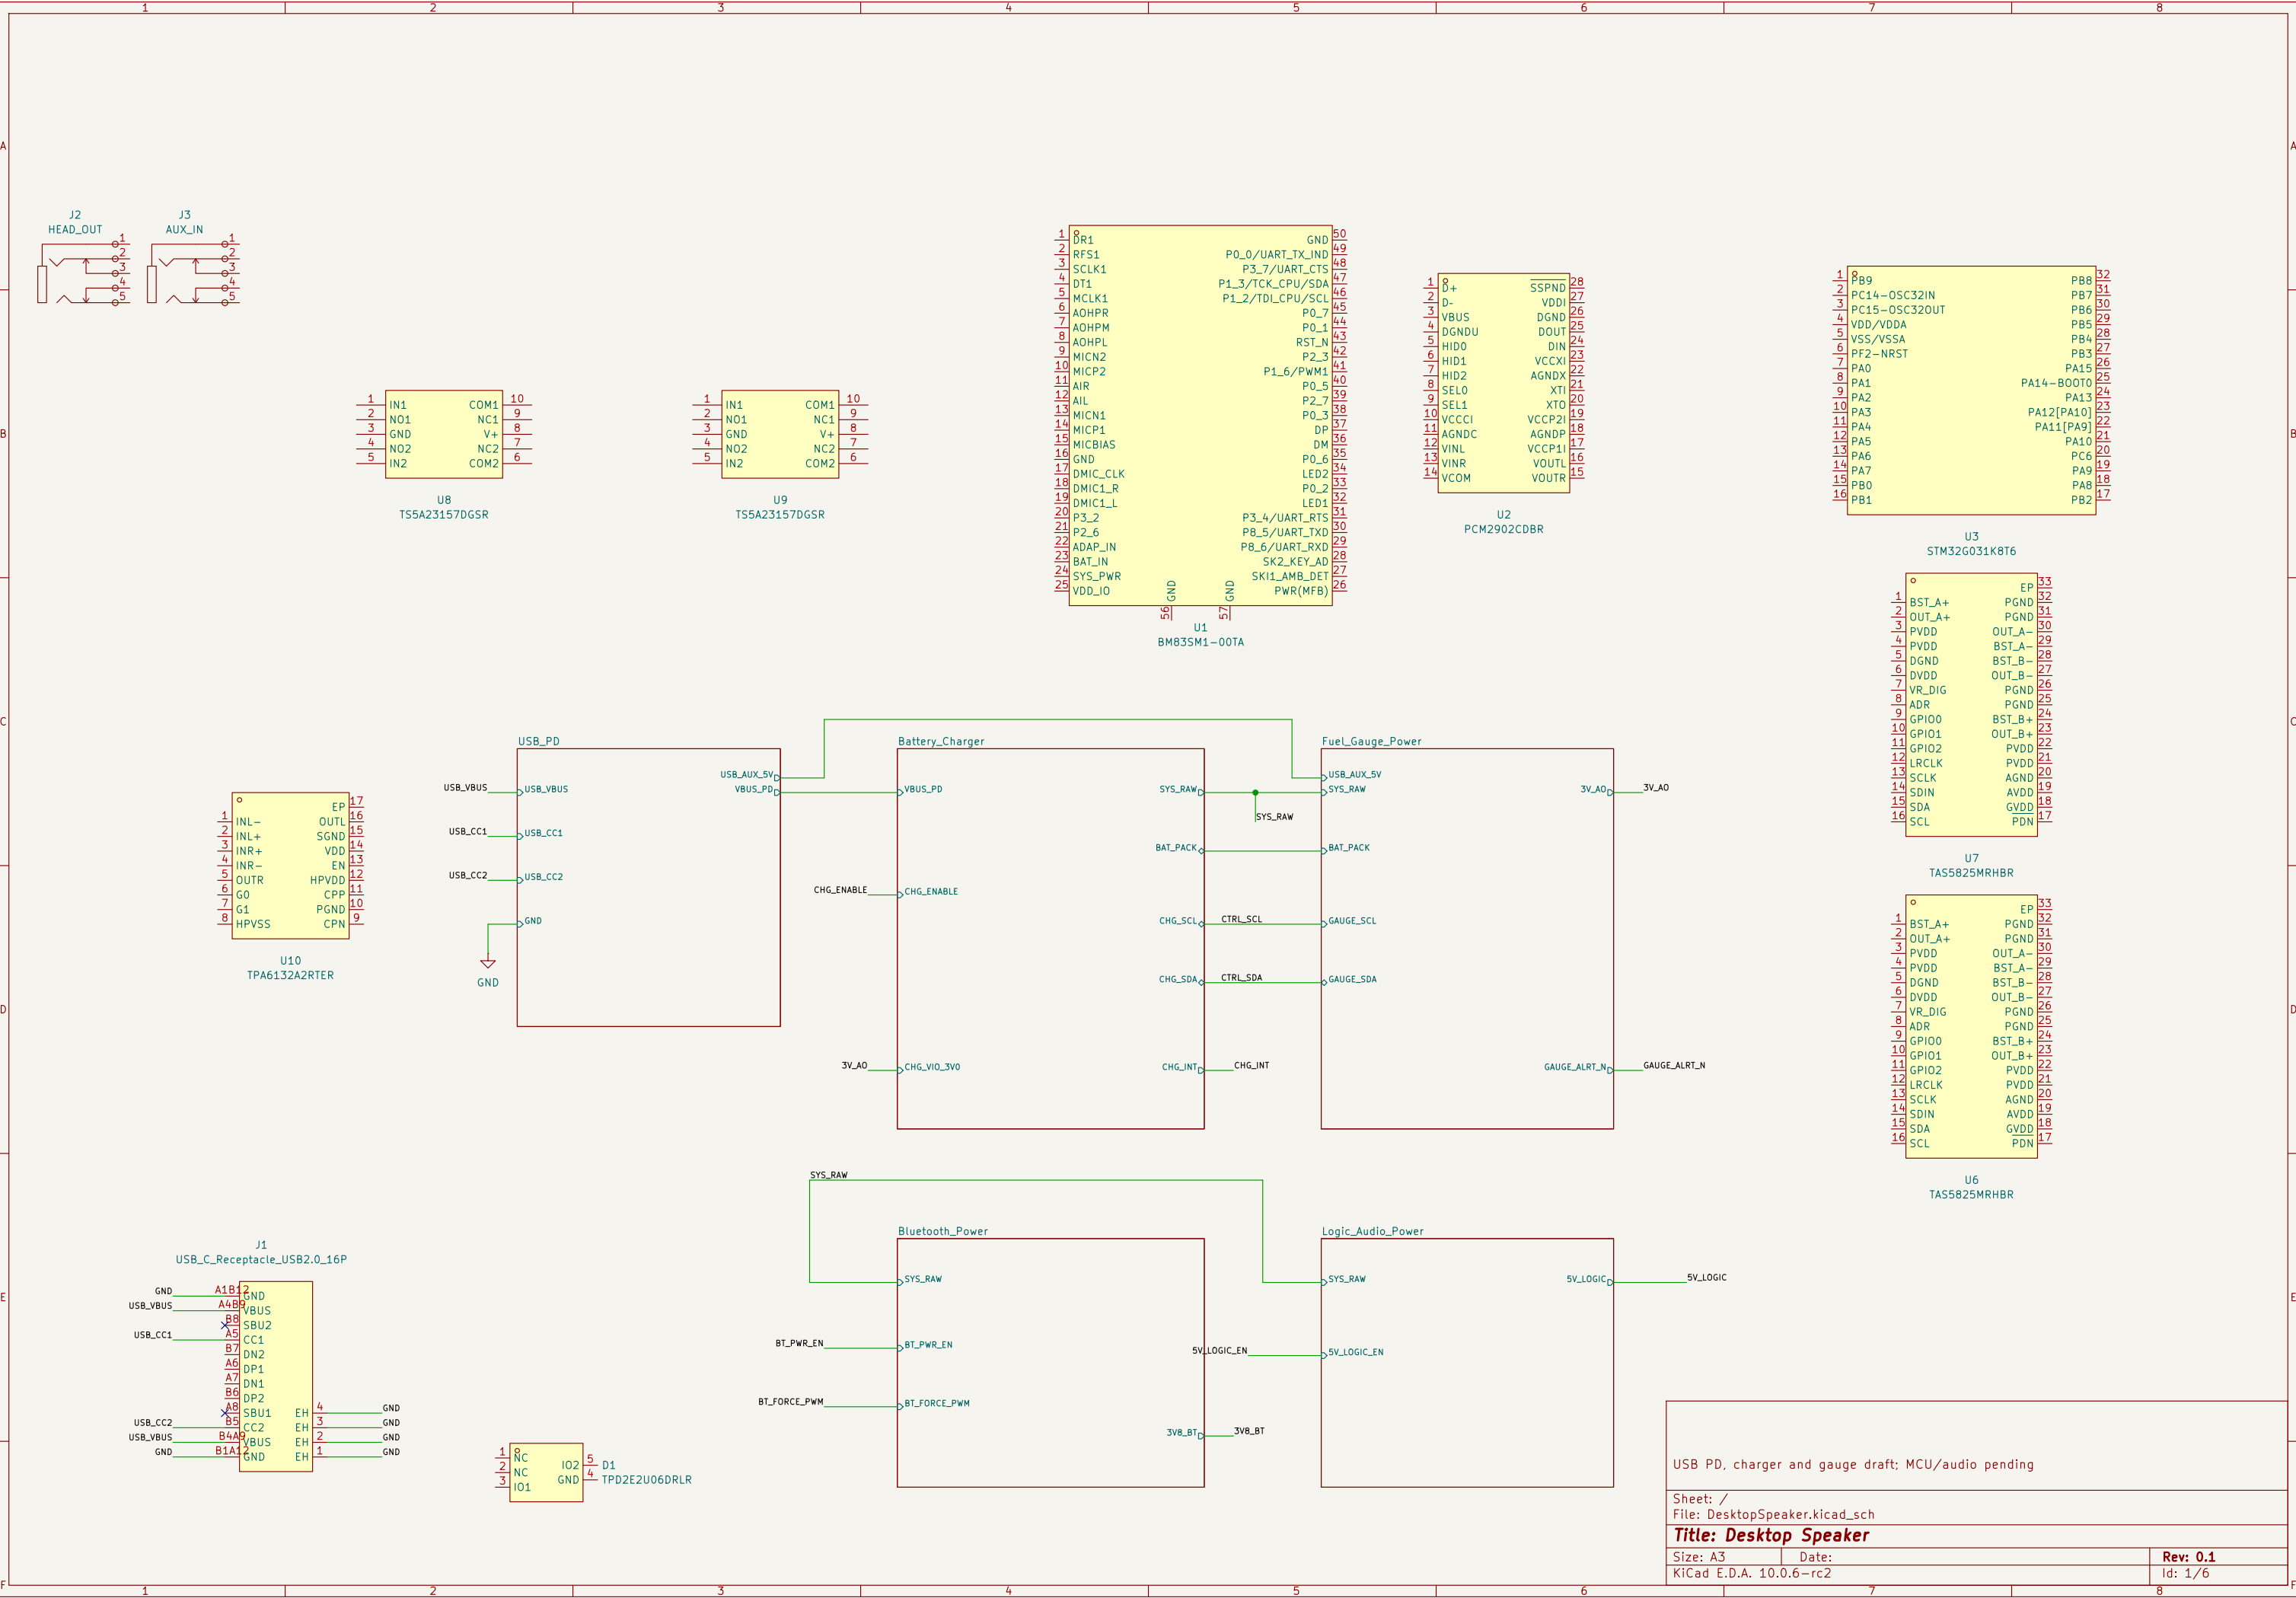

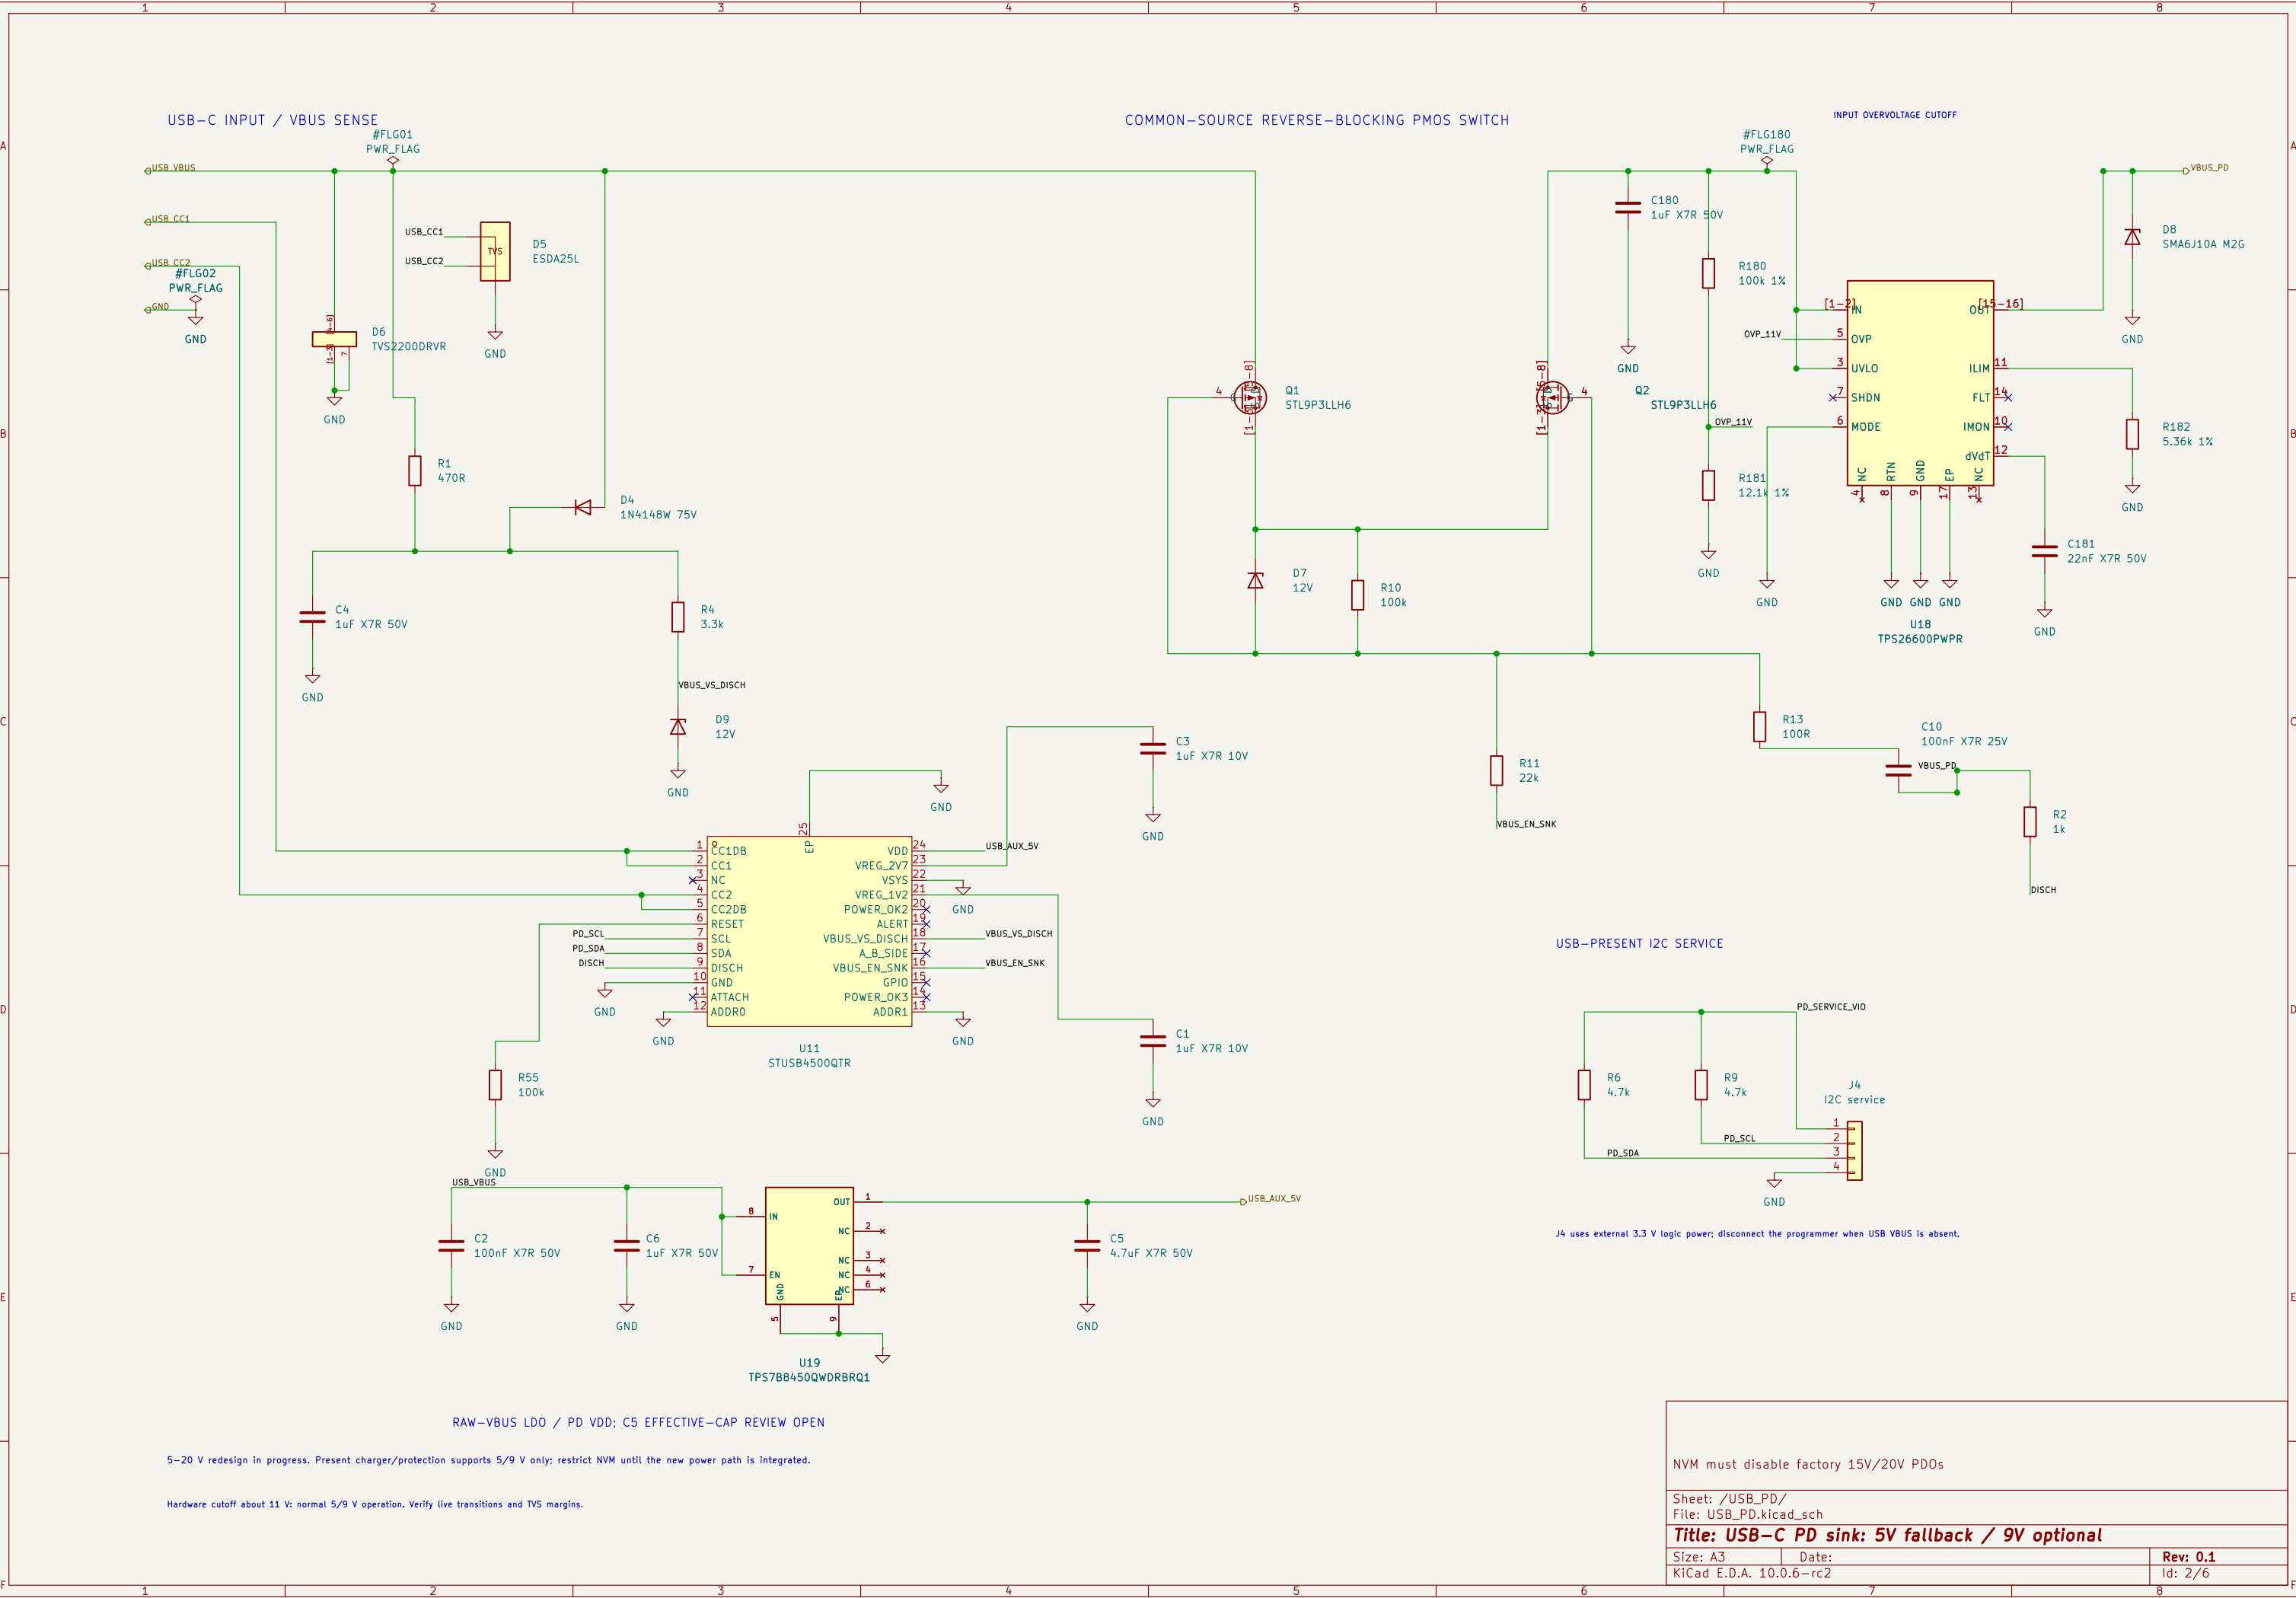


Charge disabled until MCU validates pack/source and sets IINLIM, VREG, ICHG, watchdog.

D+/D- unused; disable AUTO_DPDM. SYS_RAW is not a regulated 5 V rail.

QON wake: hold SW100 ≥ 2.3 s; USB insertion also exits ship mode.

VBUS 3.9–14 V; PMID 8.2uF suggested (OTG unused)

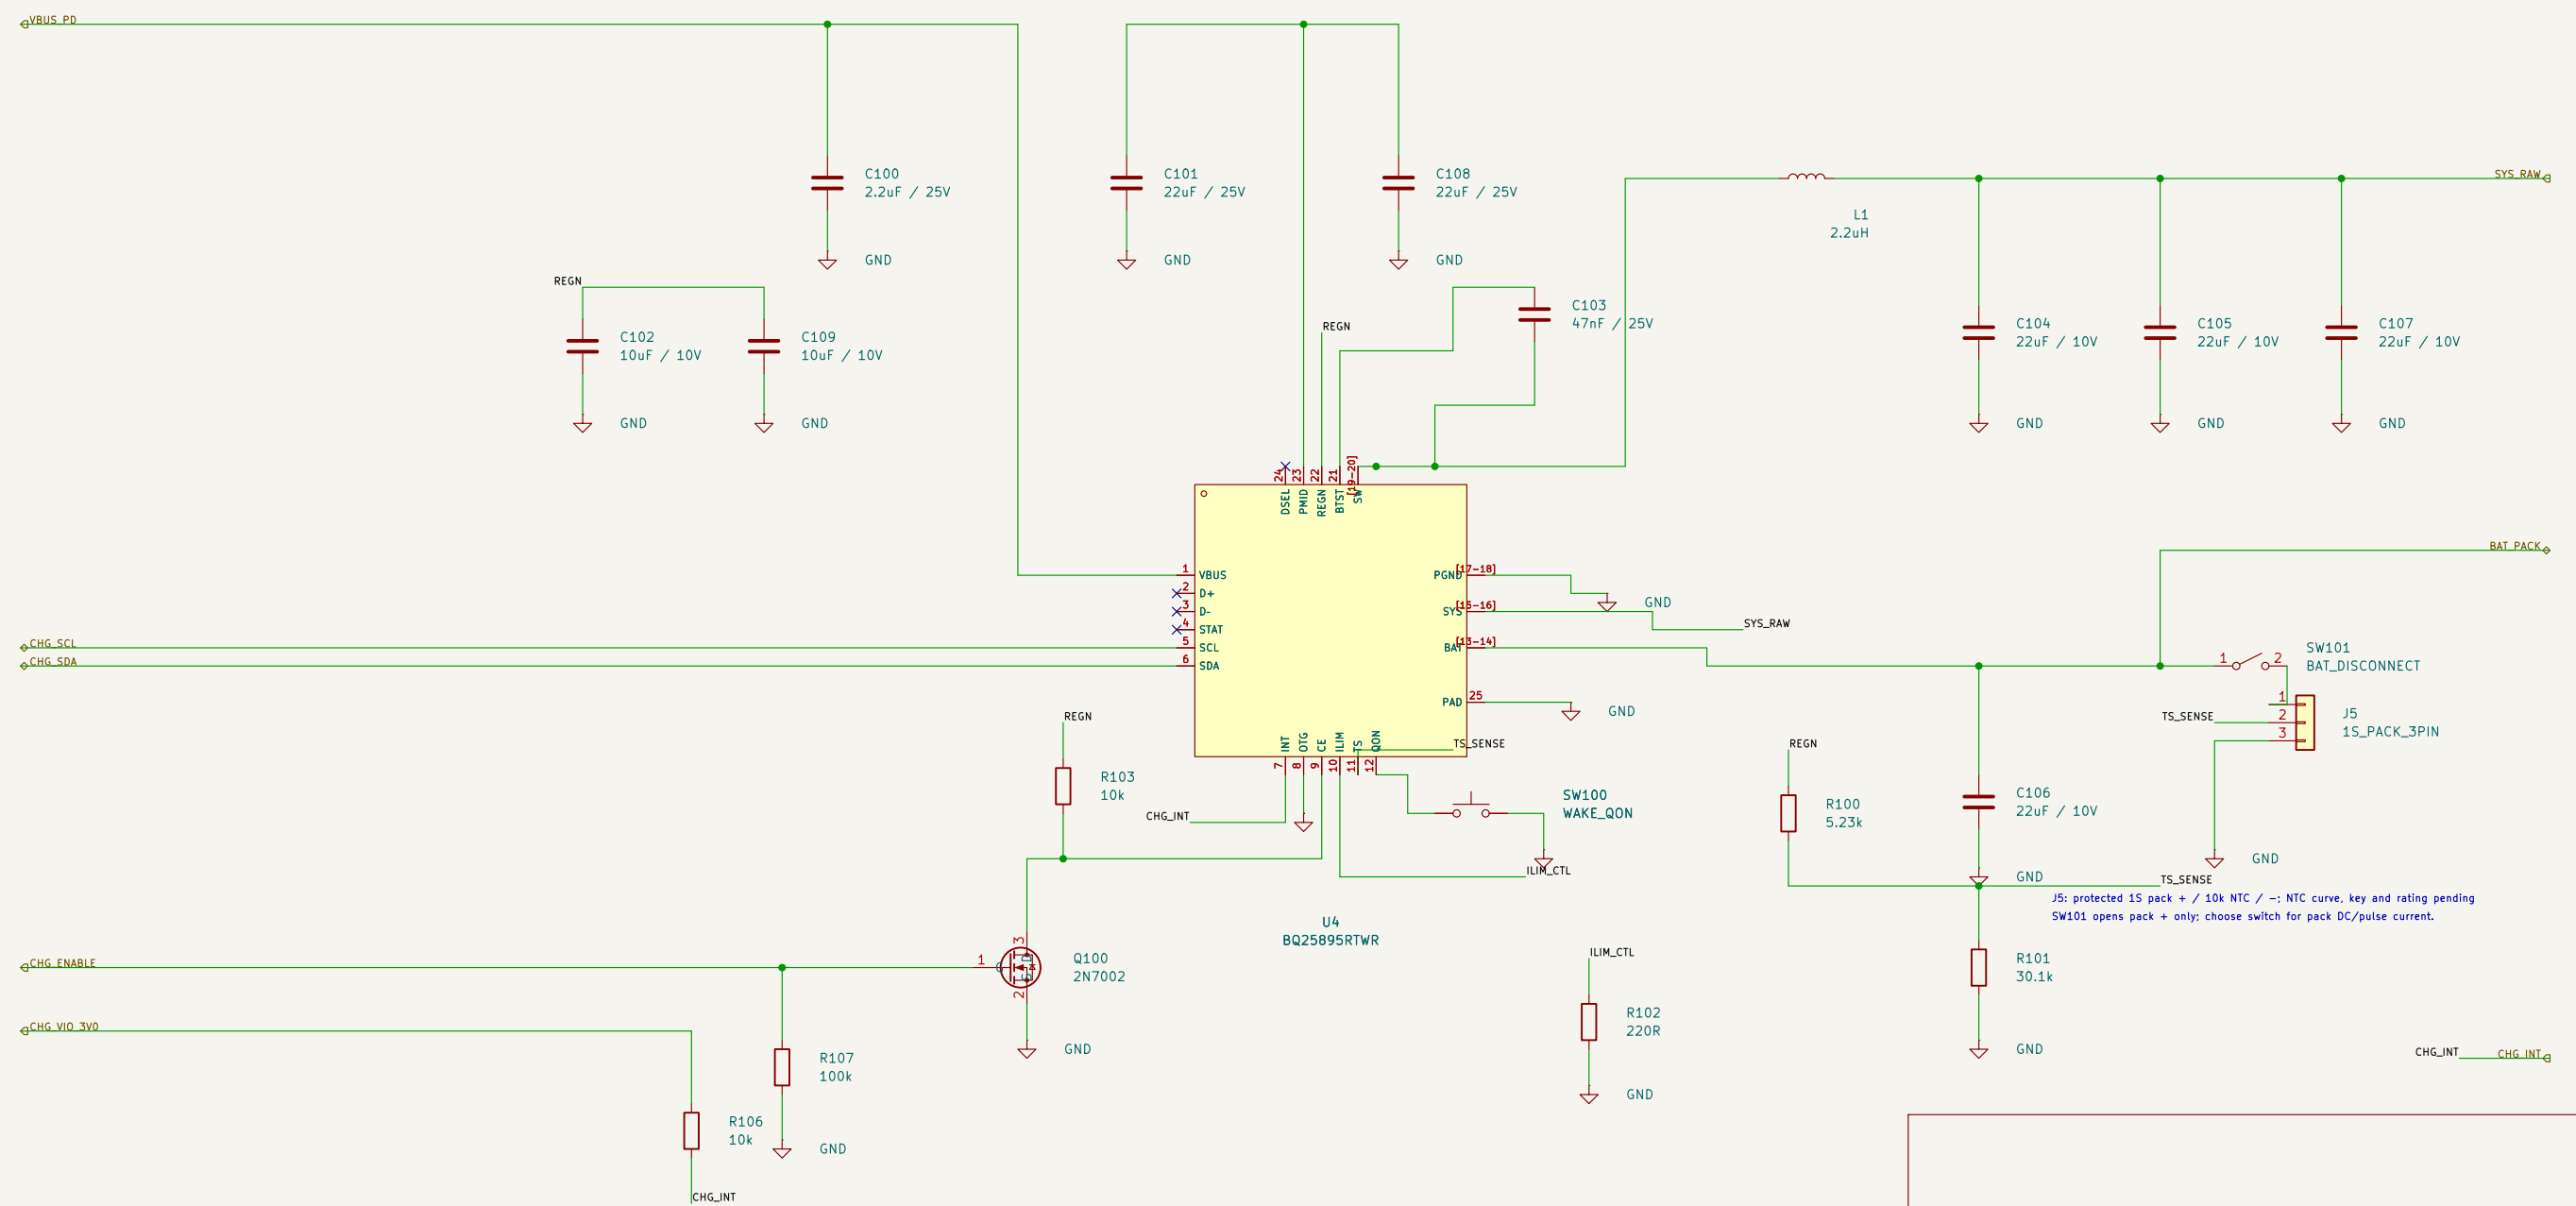


Sheet: /Battery_Charger/
File: Battery_Charger.kicad_sch

Title: BQ25895 charger and 1S battery power path

Size: A3	Date:	Rev: 0.1
KiCad E.D.A. 10.0.6-rc2		Id: 3/6

Rev: 0.1
Id: 4/6

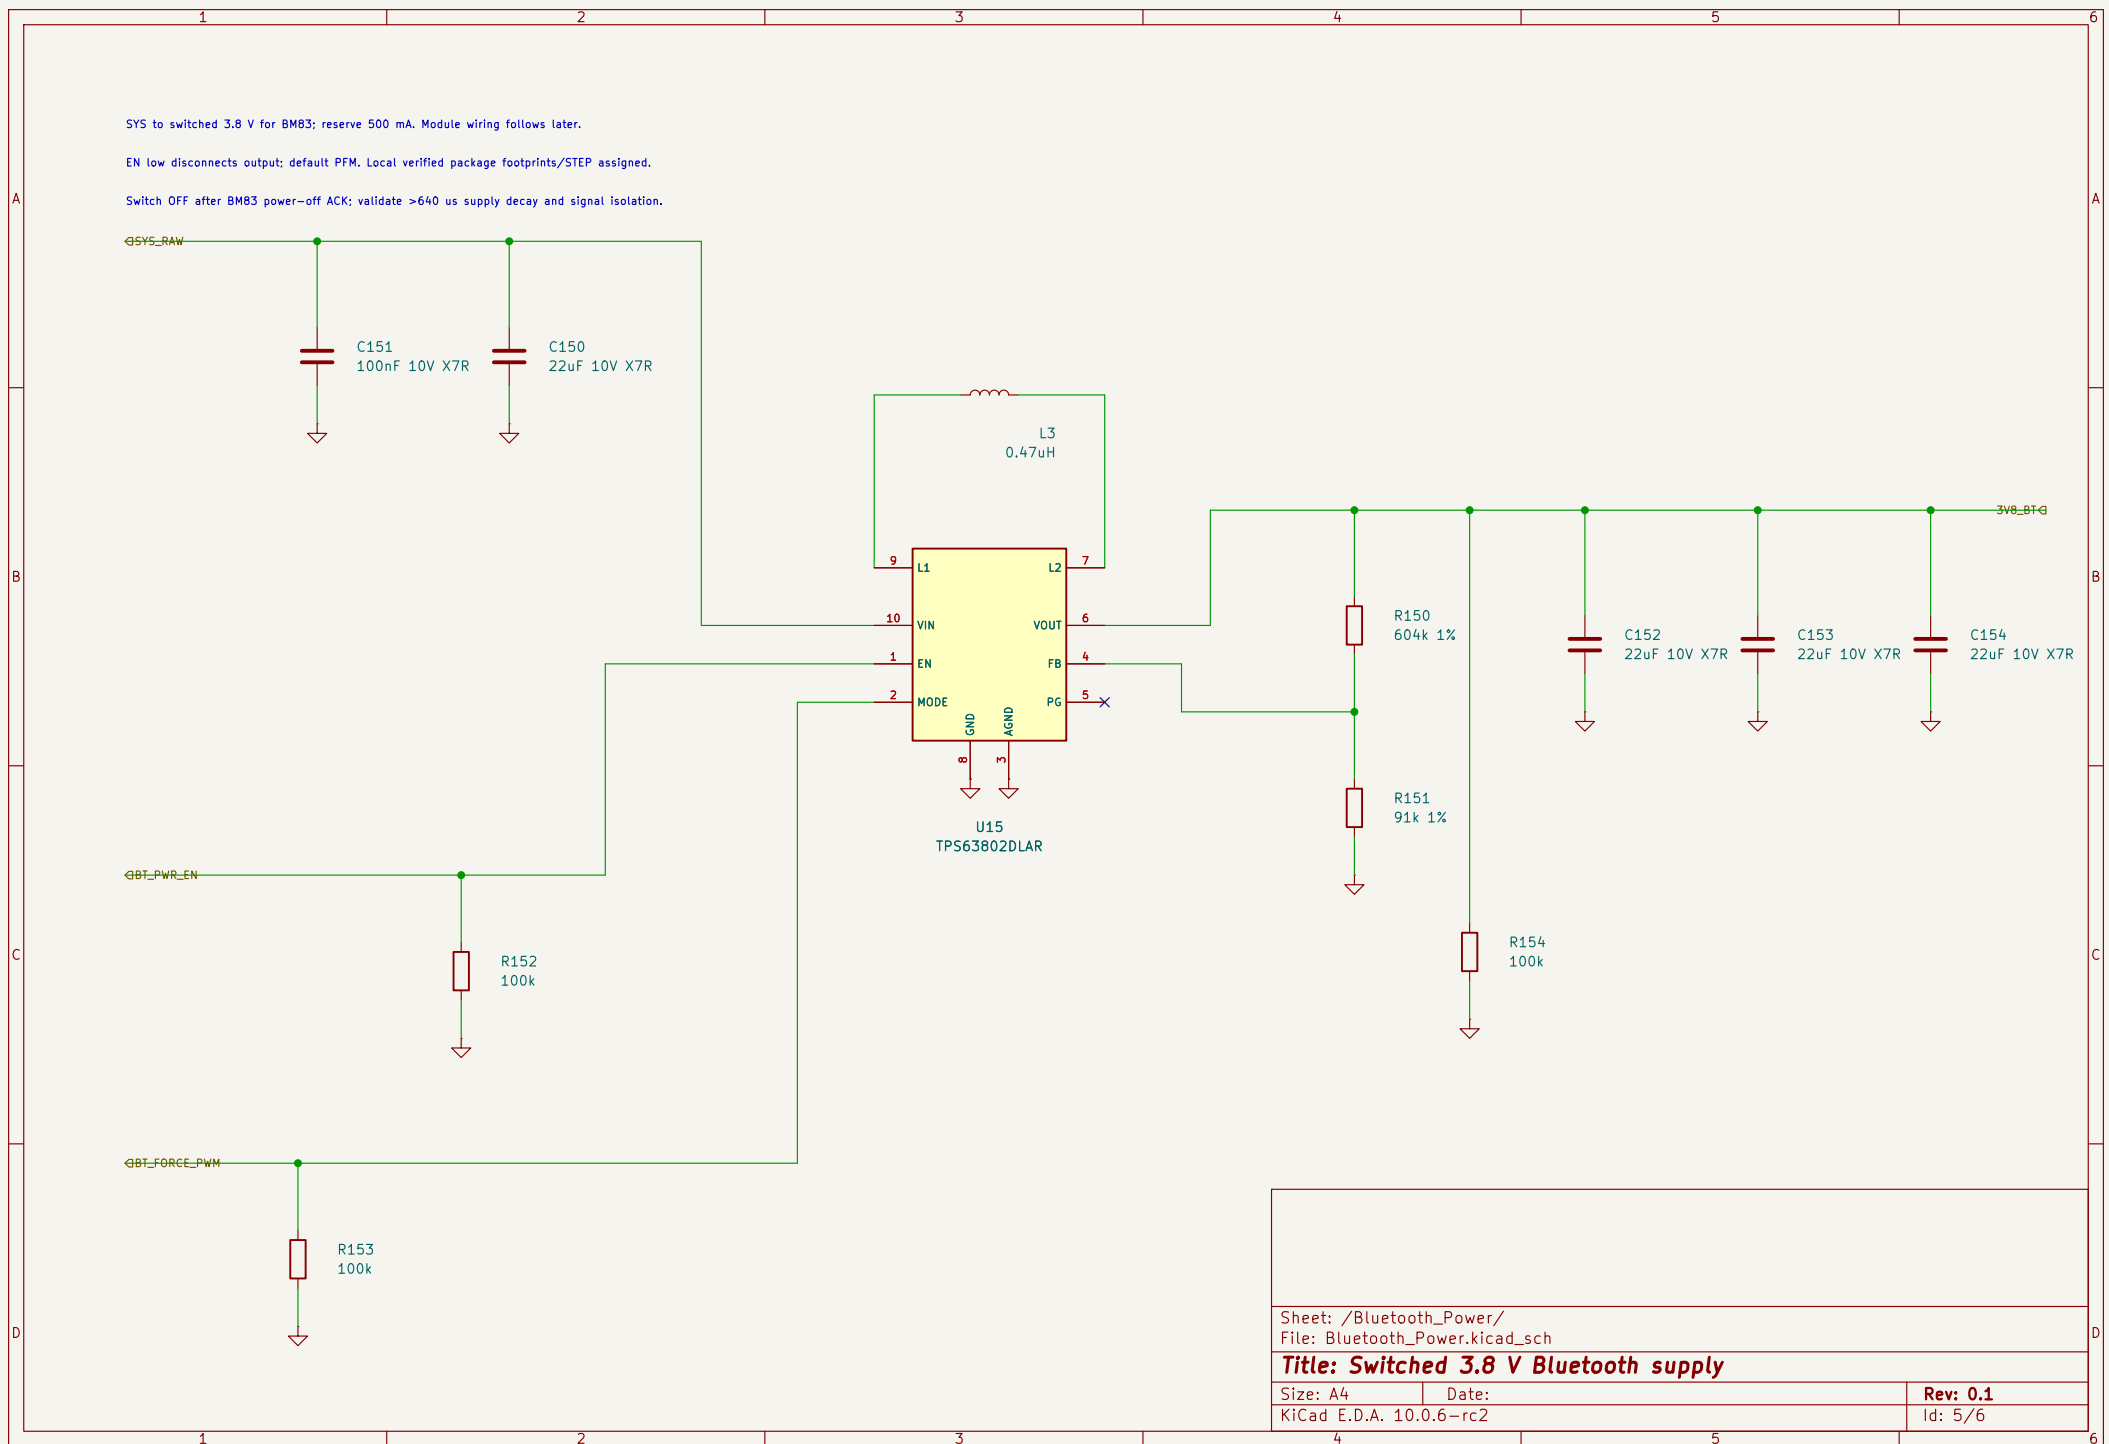

Protected 1S SYS to switched 5 V; reserve 500 mA total. Codec and other 5 V loads connect later.

EN low = true input/output disconnect; MODE tied to SYS_RAW forces PWM after soft-start.

Steady PWM divider DC bound is within PCM2902C limits; soft-start uses PFM. Ripple and startup transient require qualification.

