





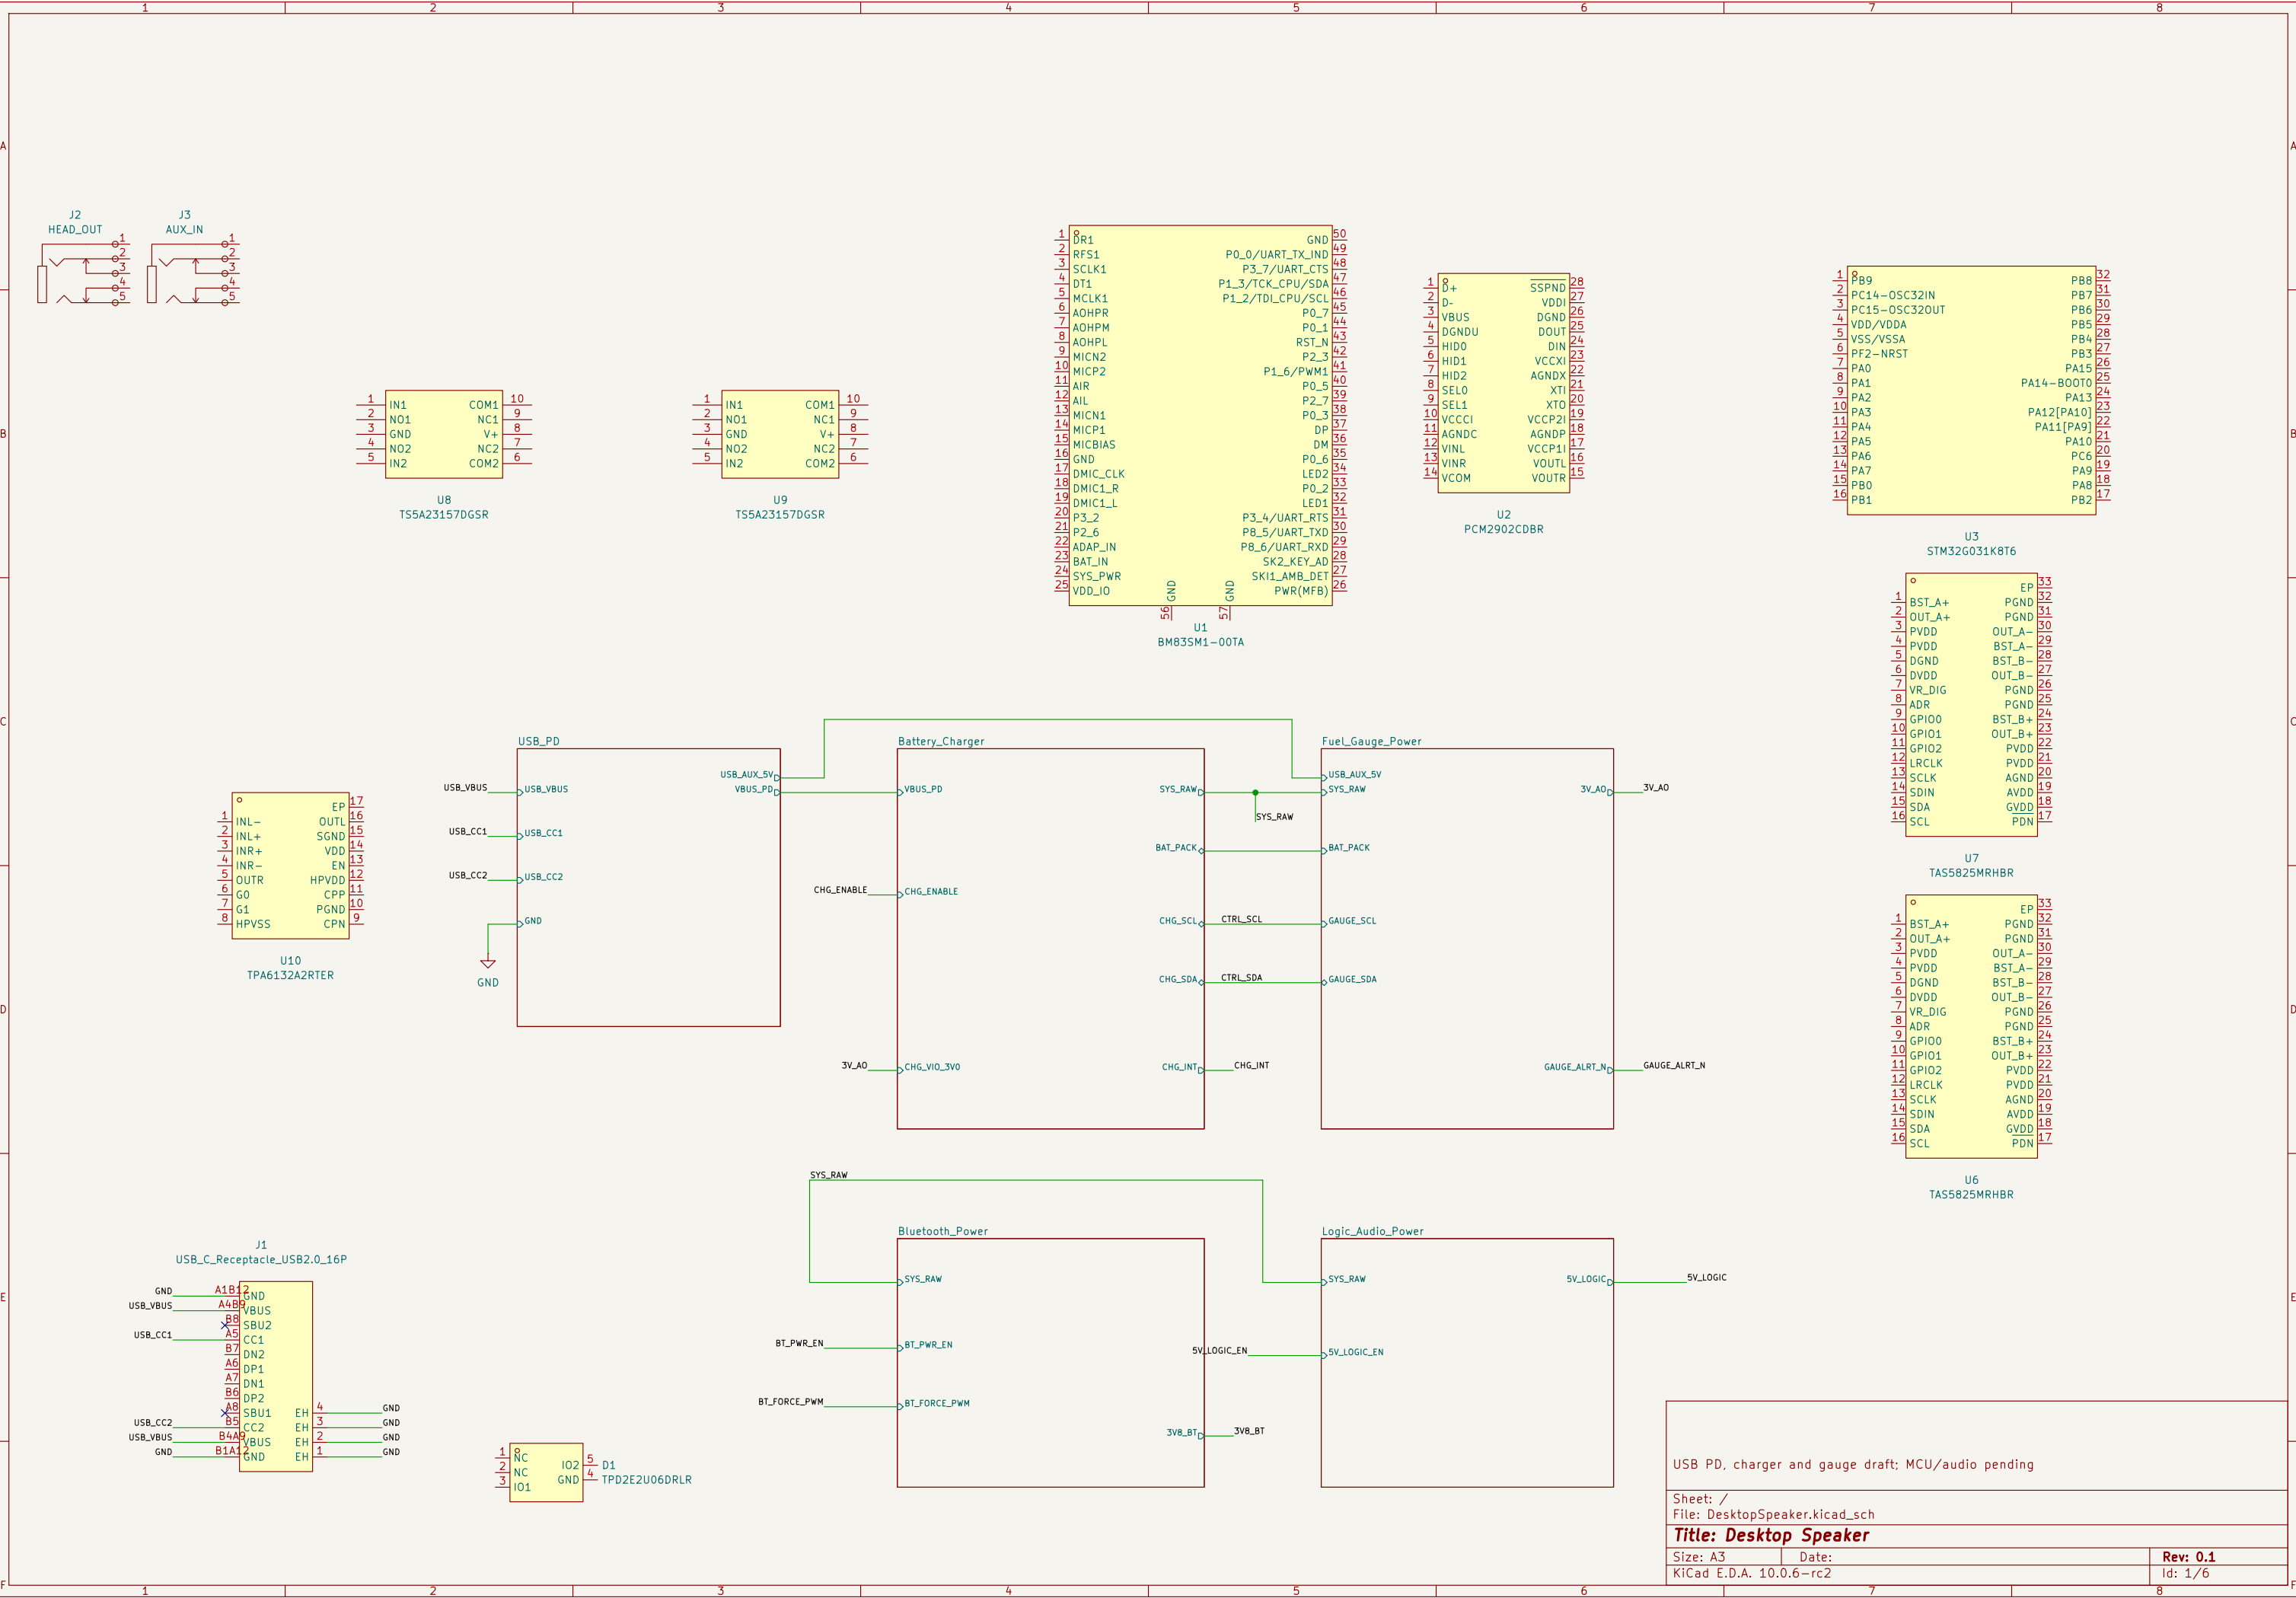

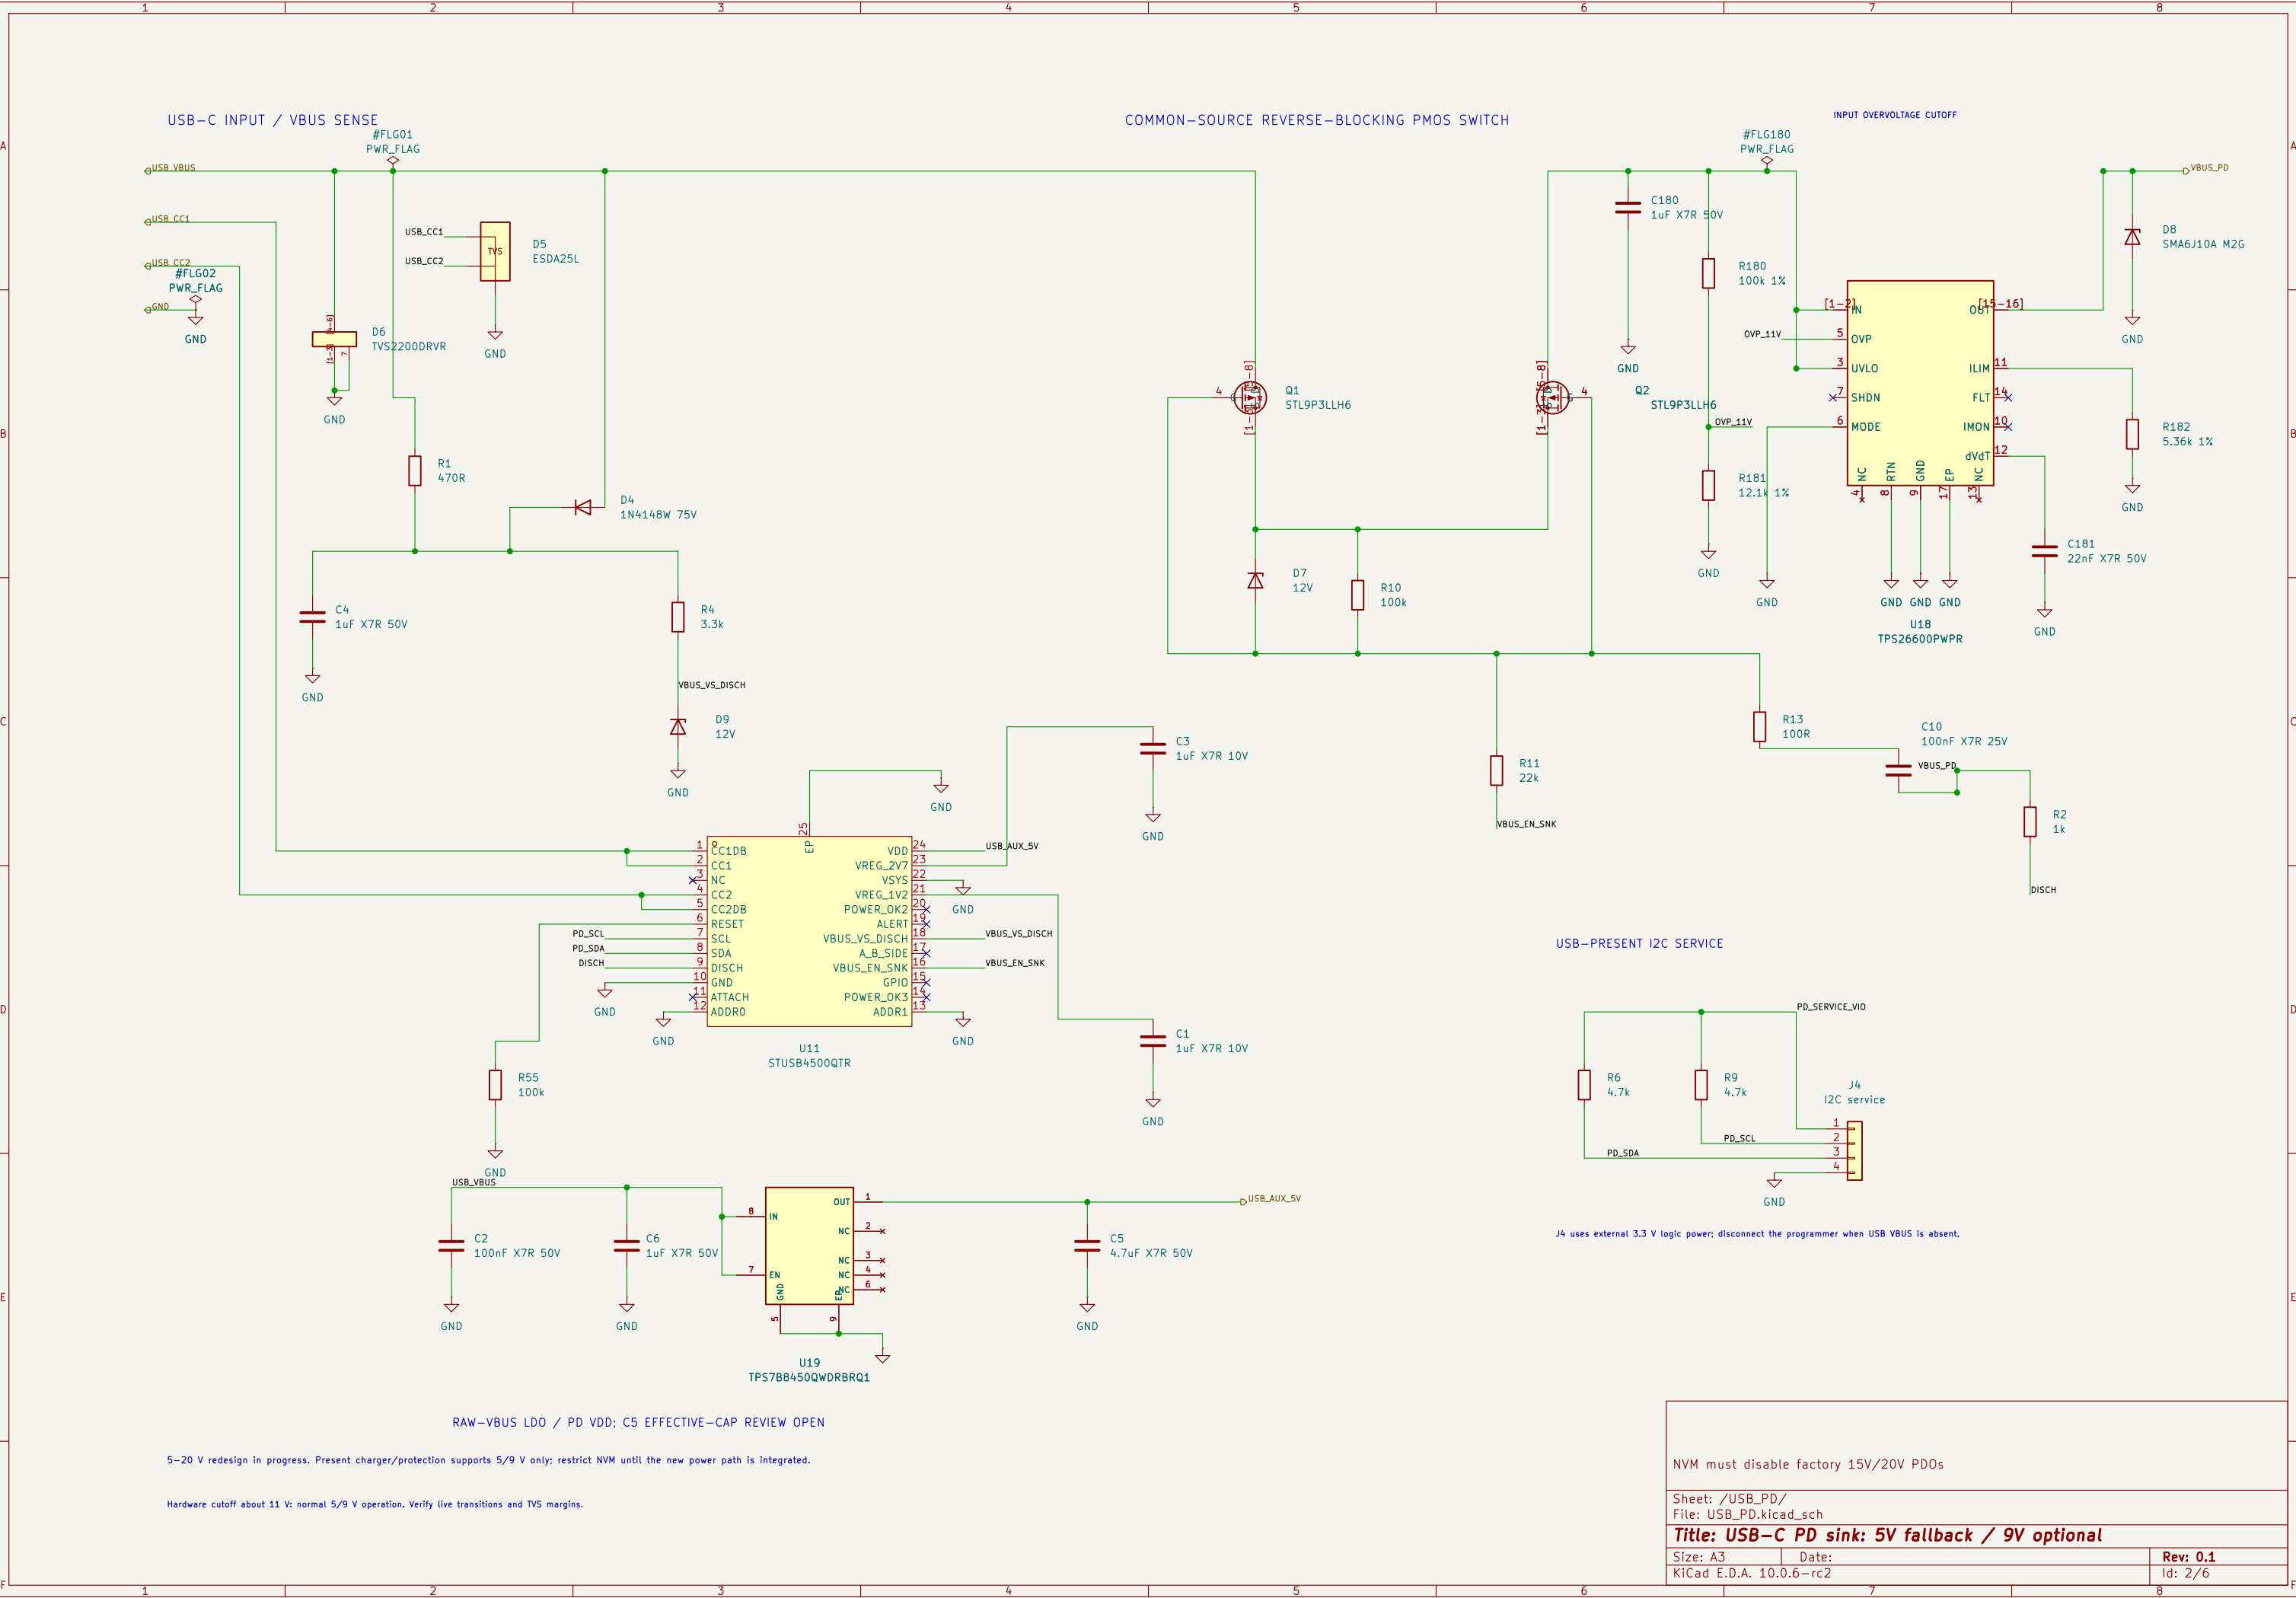

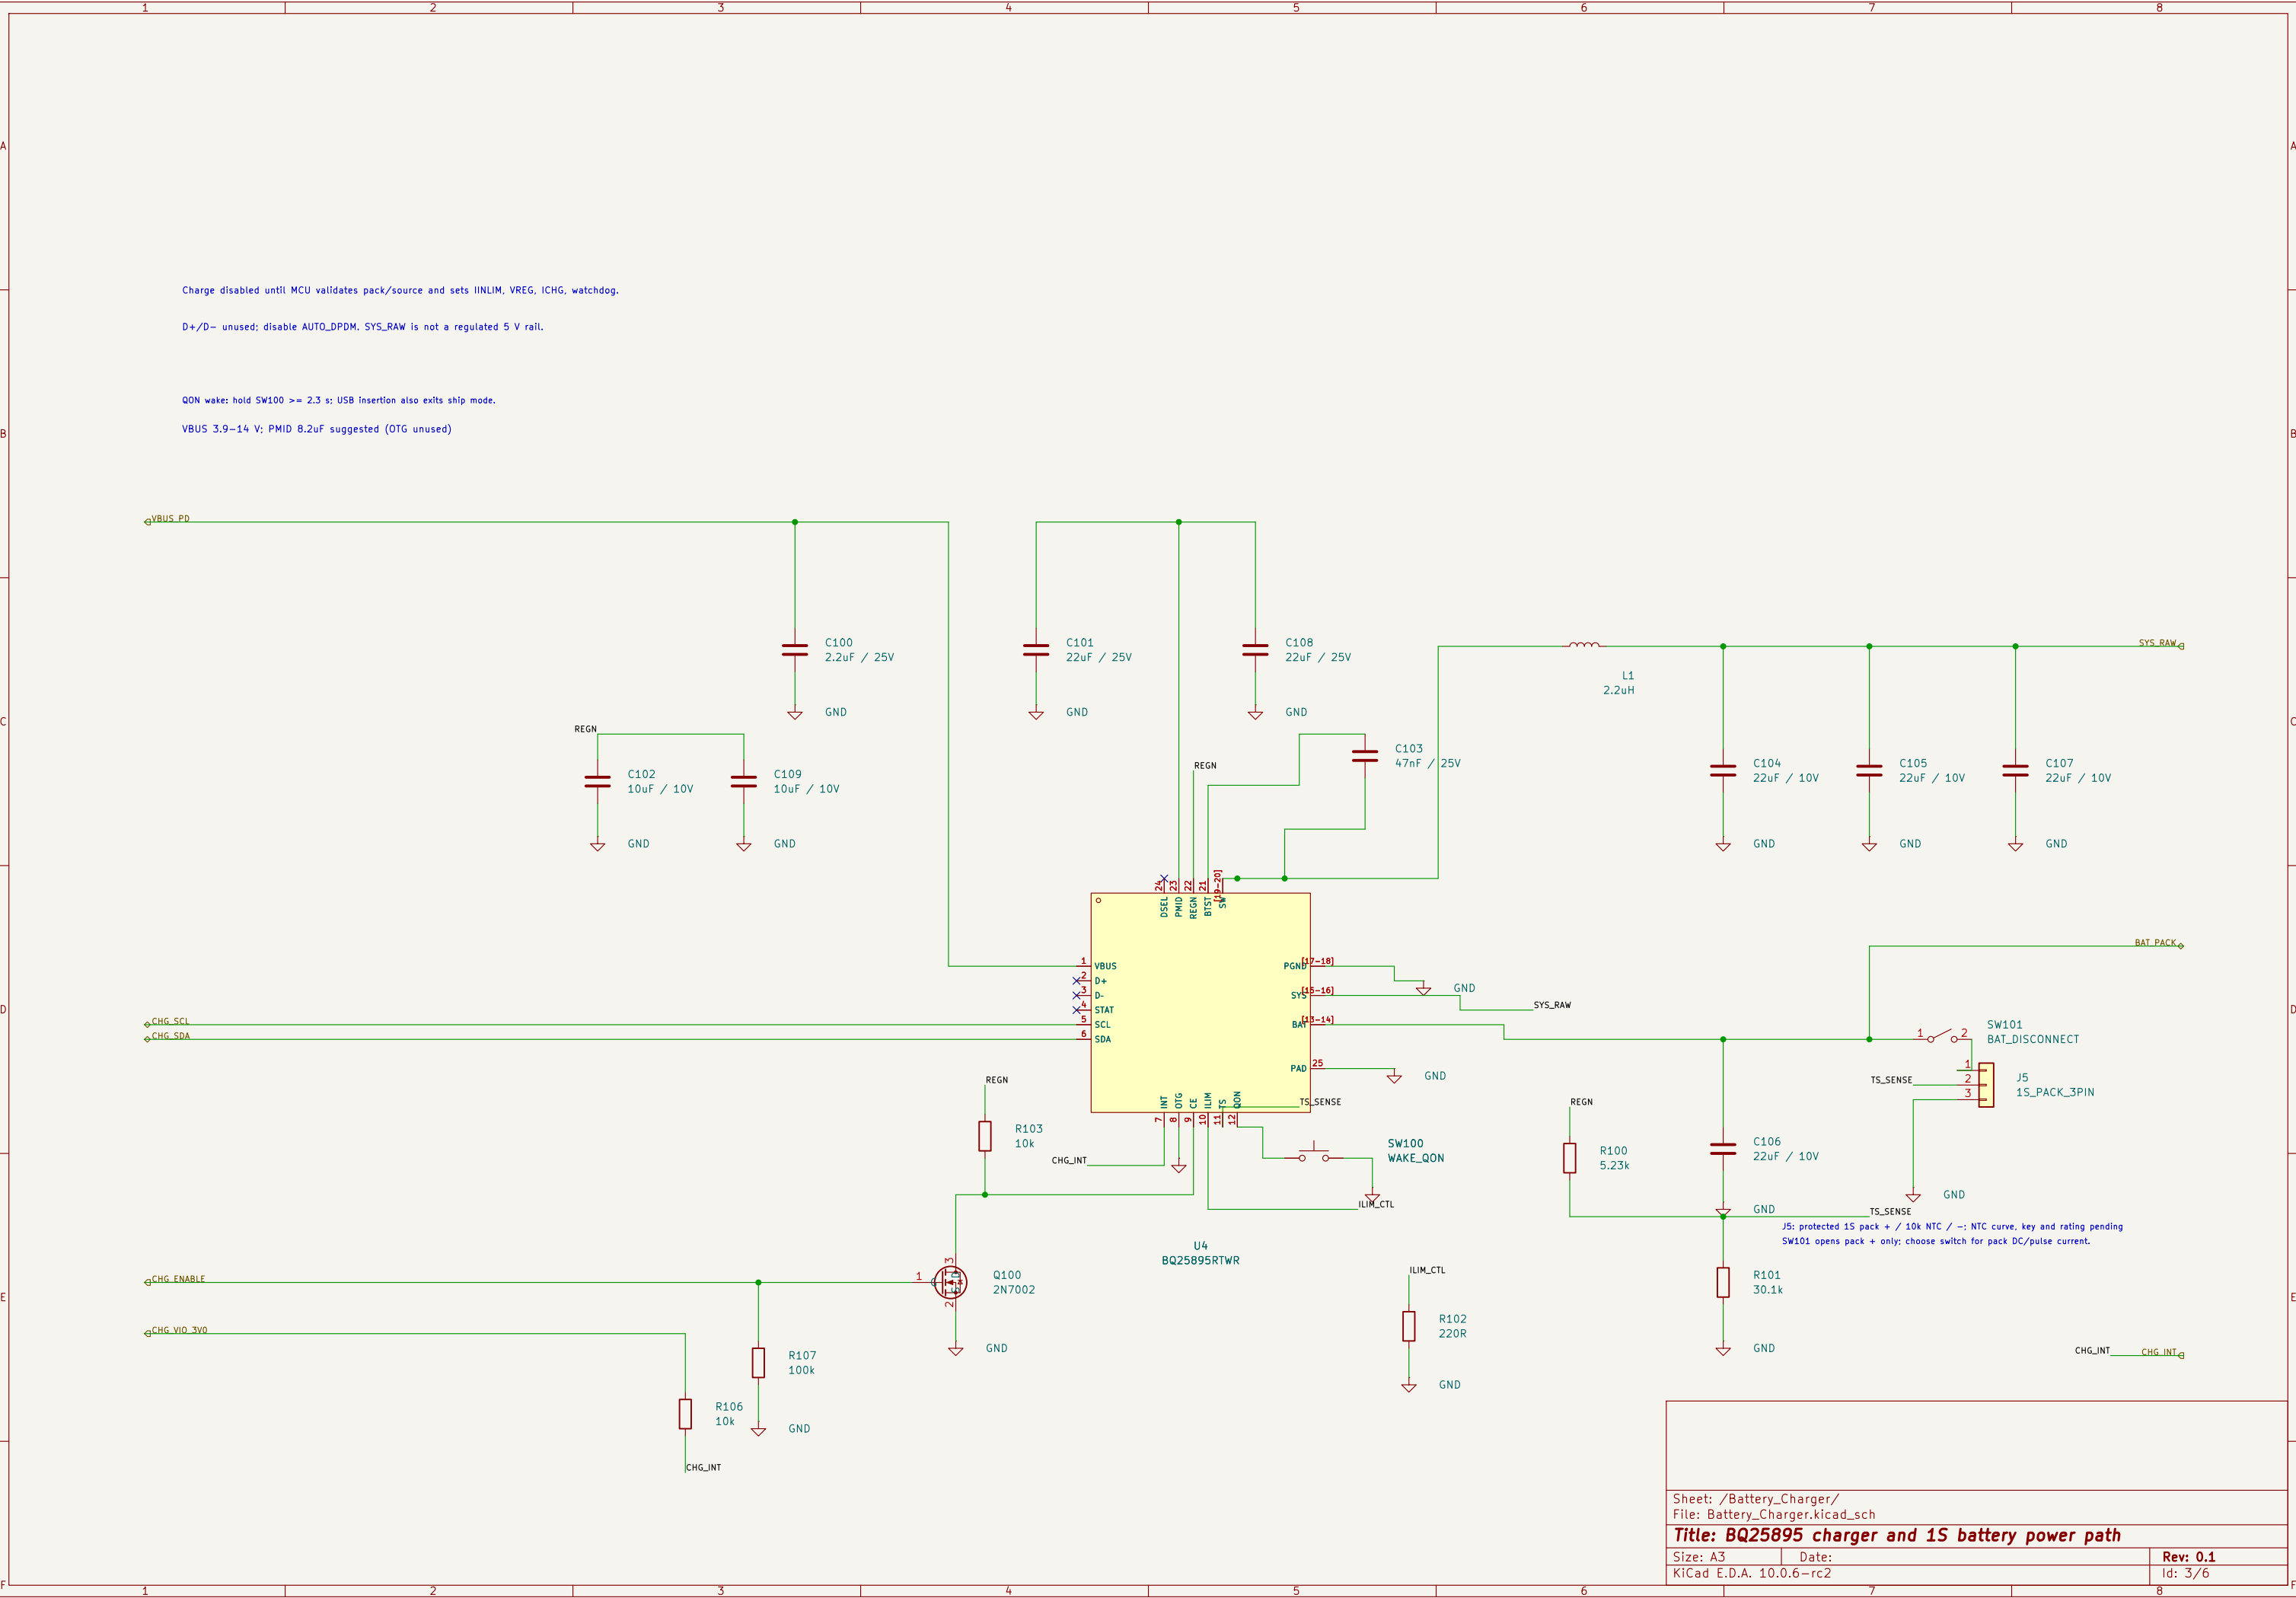

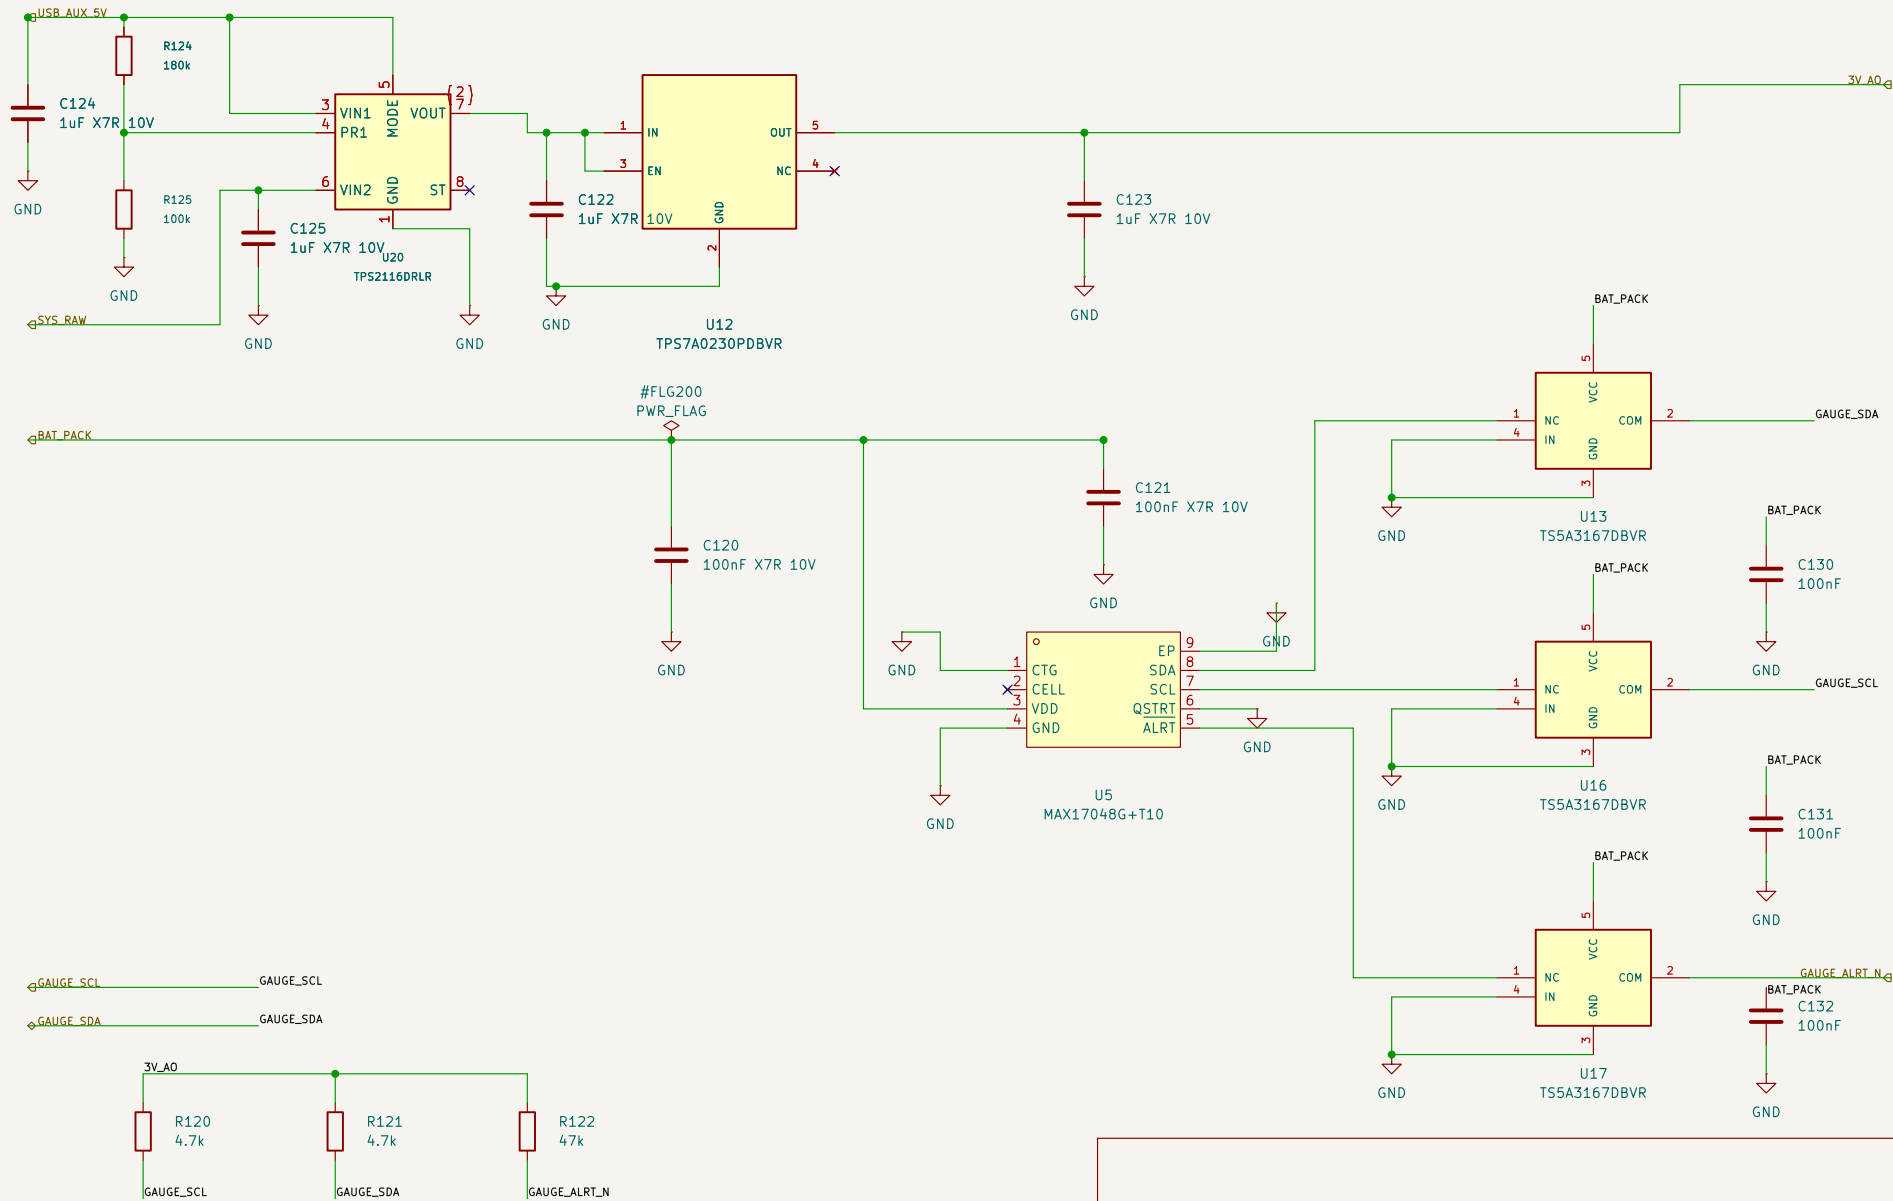

USB-priority logic supply; PR1 nominal 2.8 V.
Switchover/BOR and effective capacitance need qualification.

CELL pad 2 unused on MAX17048; QSTRT tied low

Gauge isolation: 3 active-low BAT-powered switches; OFF when BAT absent

Sheet: /FuelGauge_Power/
File: FuelGauge_Power.kicad_sch


Title: Fuel gauge and low-current power

Size: A4
KiCad E.D.A. 10.0.6-rc2

Date:

Rev: 0.1

Id: 4/6

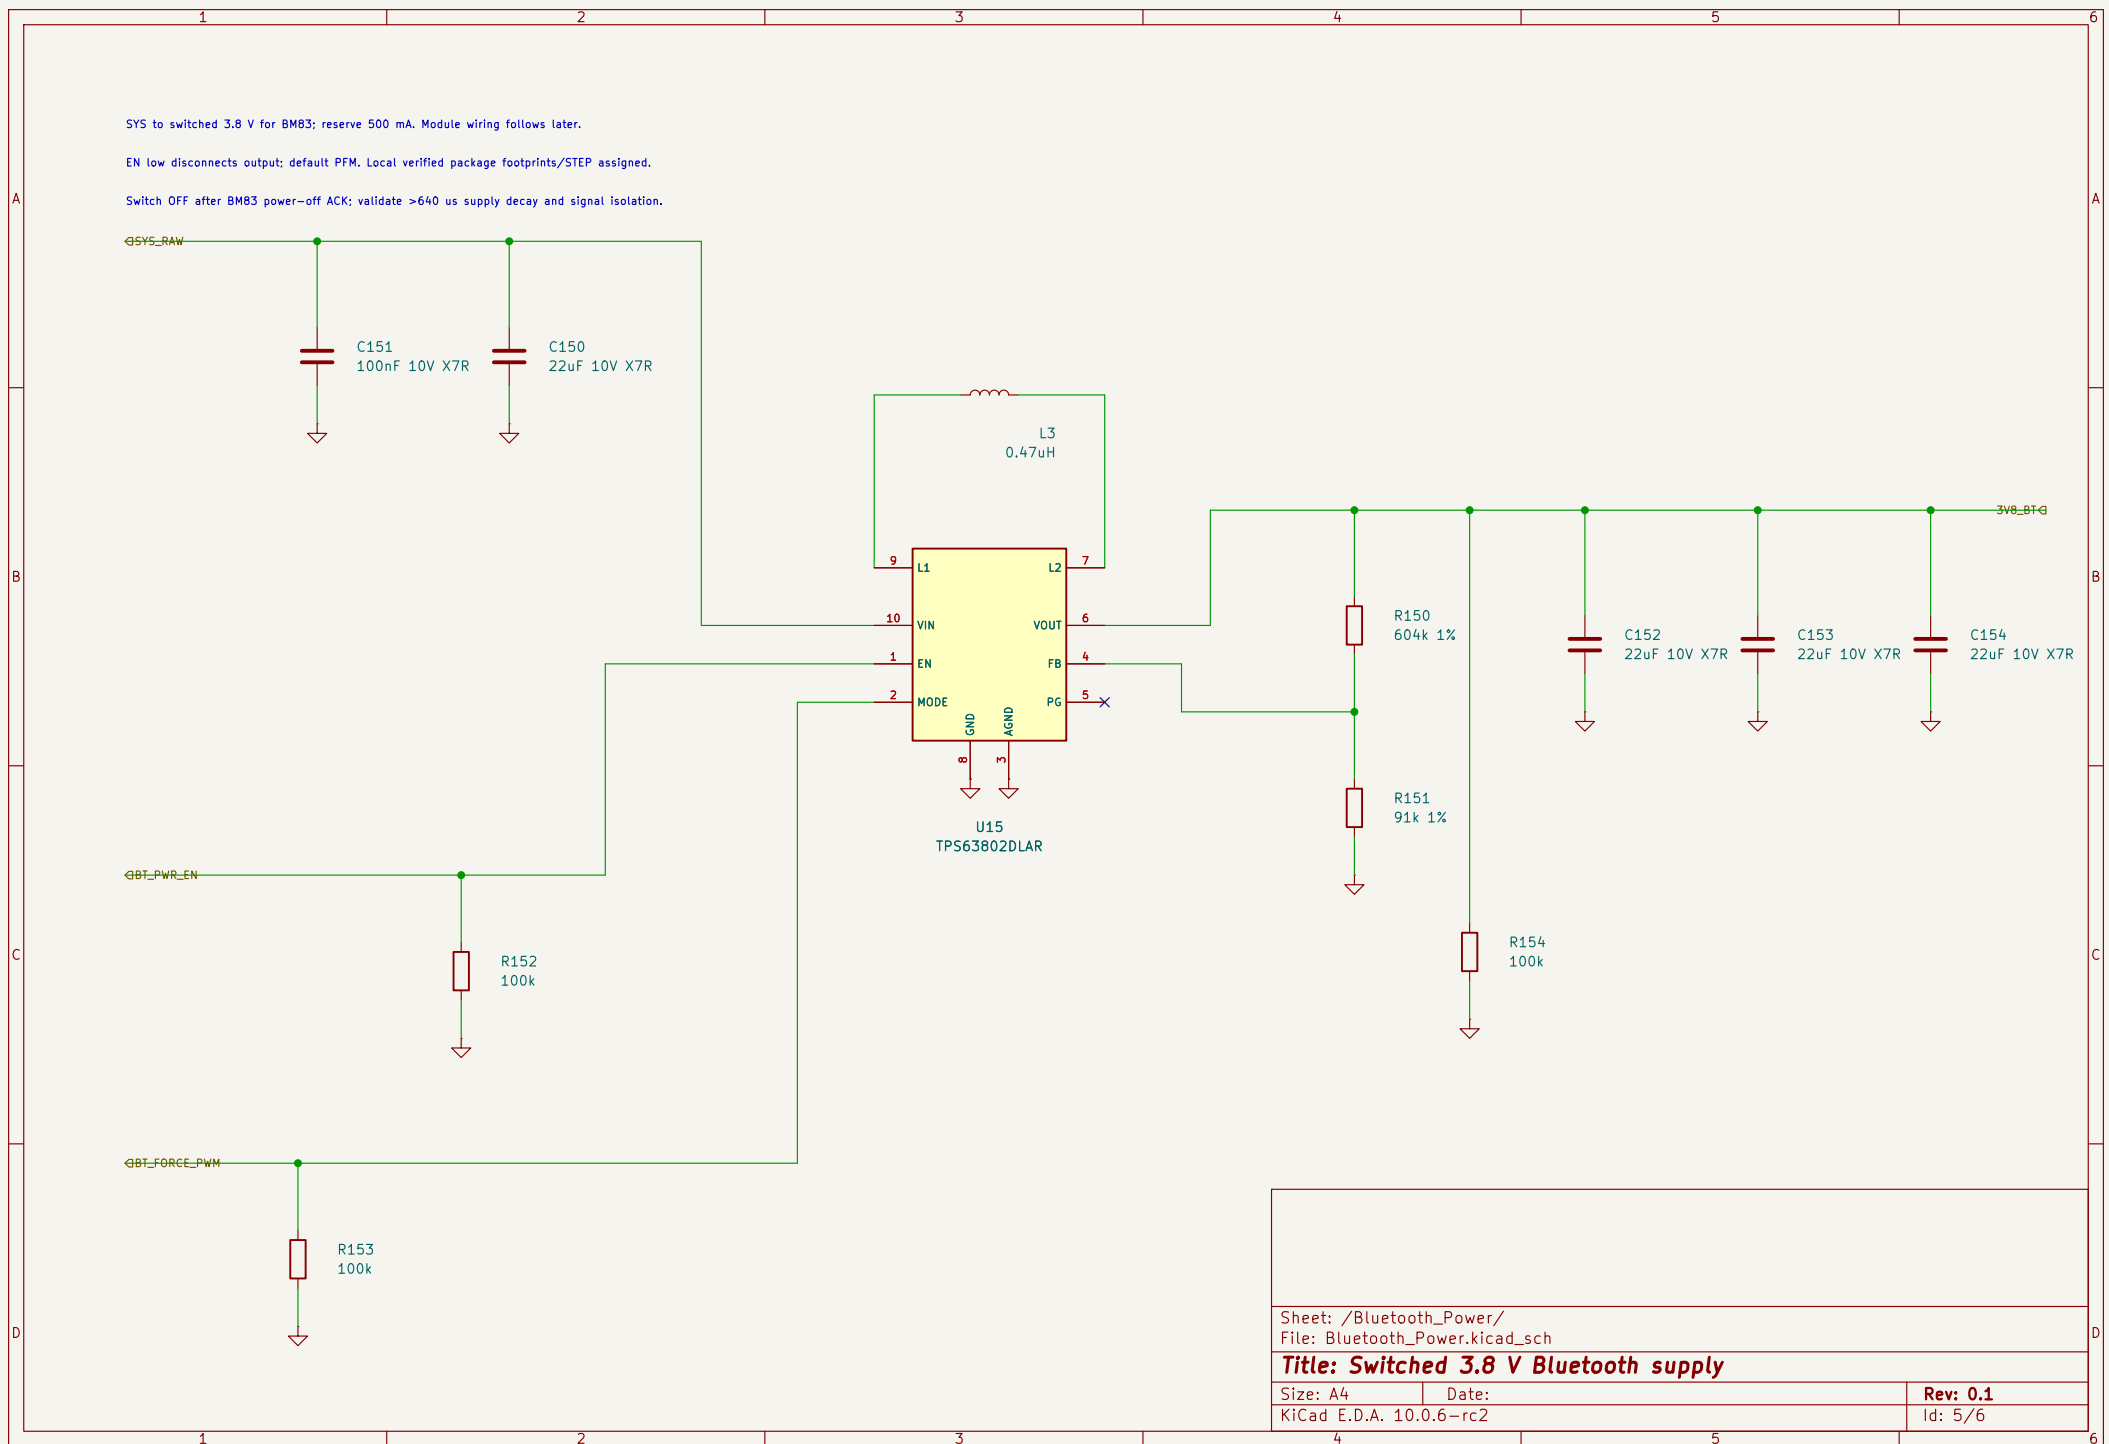

Protected 1S SYS to switched 5 V; reserve 500 mA total. Codec and other 5 V loads connect later.

EN low = true input/output disconnect; MODE tied to SYS_RAW forces PWM after soft-start.

Steady PWM divider DC bound is within PCM2902C limits; soft-start uses PFM. Ripple and startup transient require qualification.

