


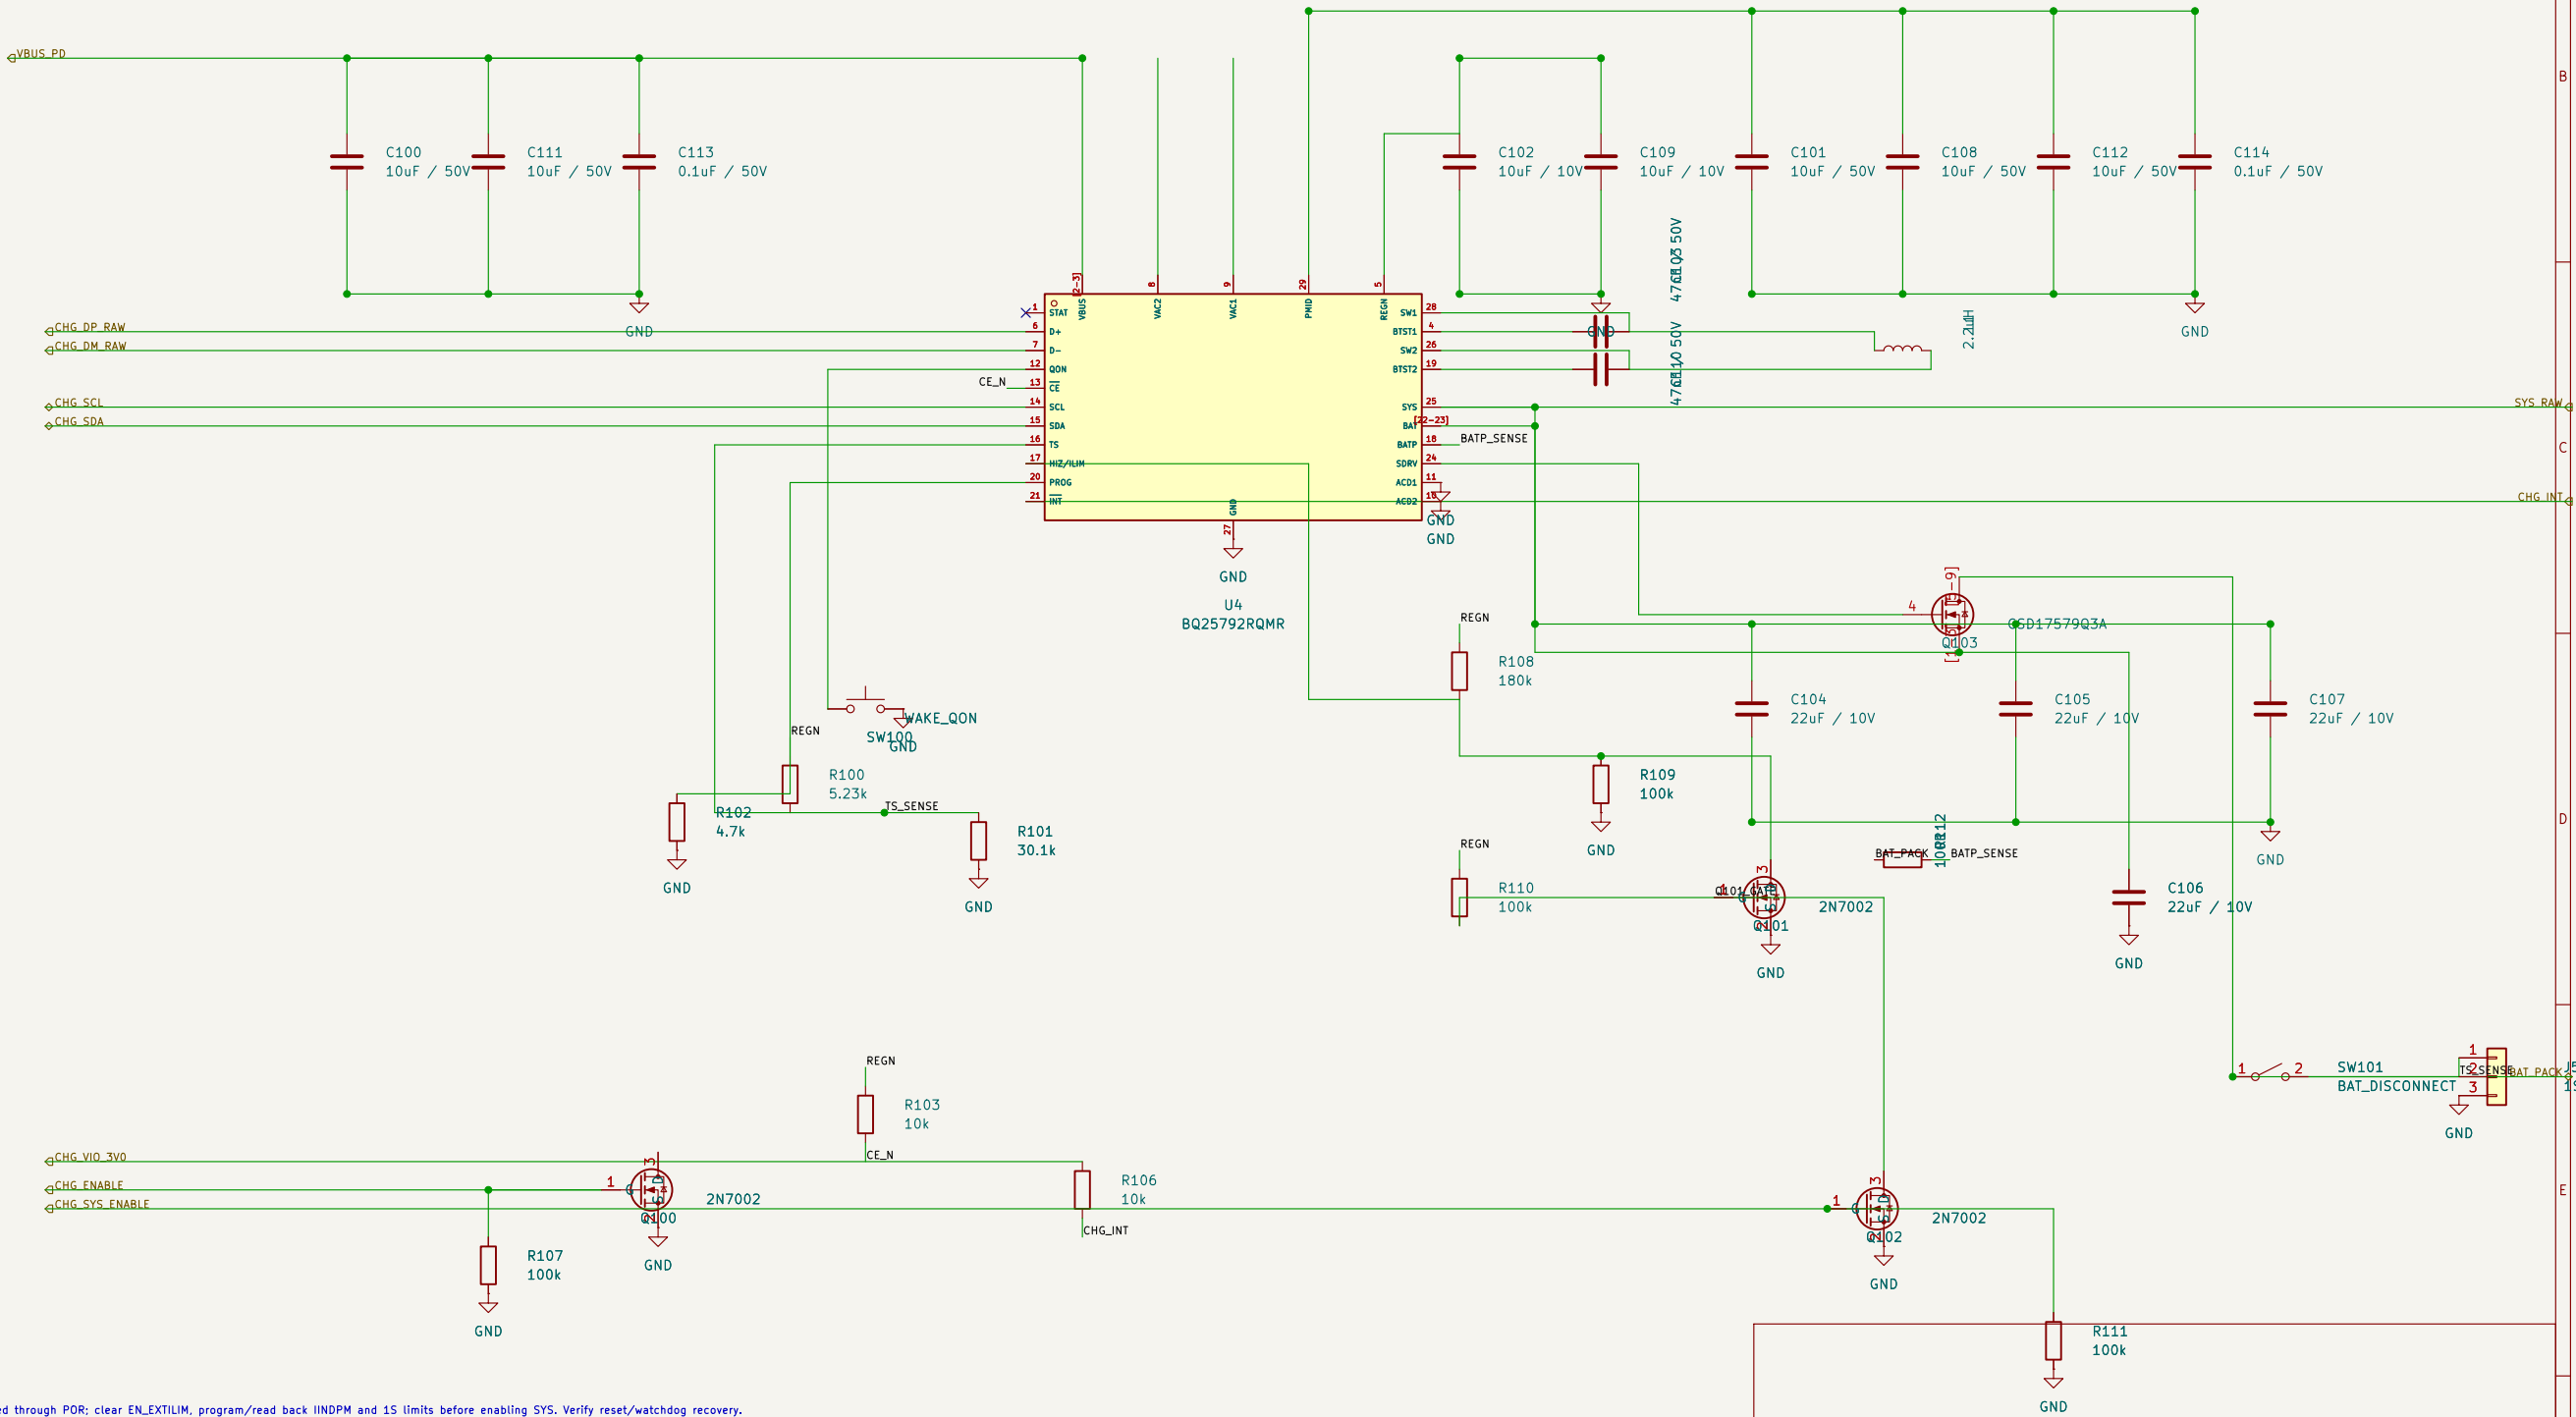

Startup: keep HIZ clamped through POR; clear EN_EXTILIM, program/read back IINDPM and 1S limits before enabling SYS. Verify reset/watchdog recovery.

Set REG14.SFET_PRESENT=1 before SDRV ship control. MCU reset/REG_RST requires reconfiguration. Pack 10k NTC curve and QON timing pending.

R102 4.7k = 1S/750kHz; use 1A initial charge target. D+/D- stay raw for mux. SYS_RAW varies; qualify TPS2116 5.5V limit/transients.

L1 2.2uH/6A and Input MLCs are provisional: qualify 20V surge/DC-bias, audio+charge current, ripple, efficiency and thermal limits.