





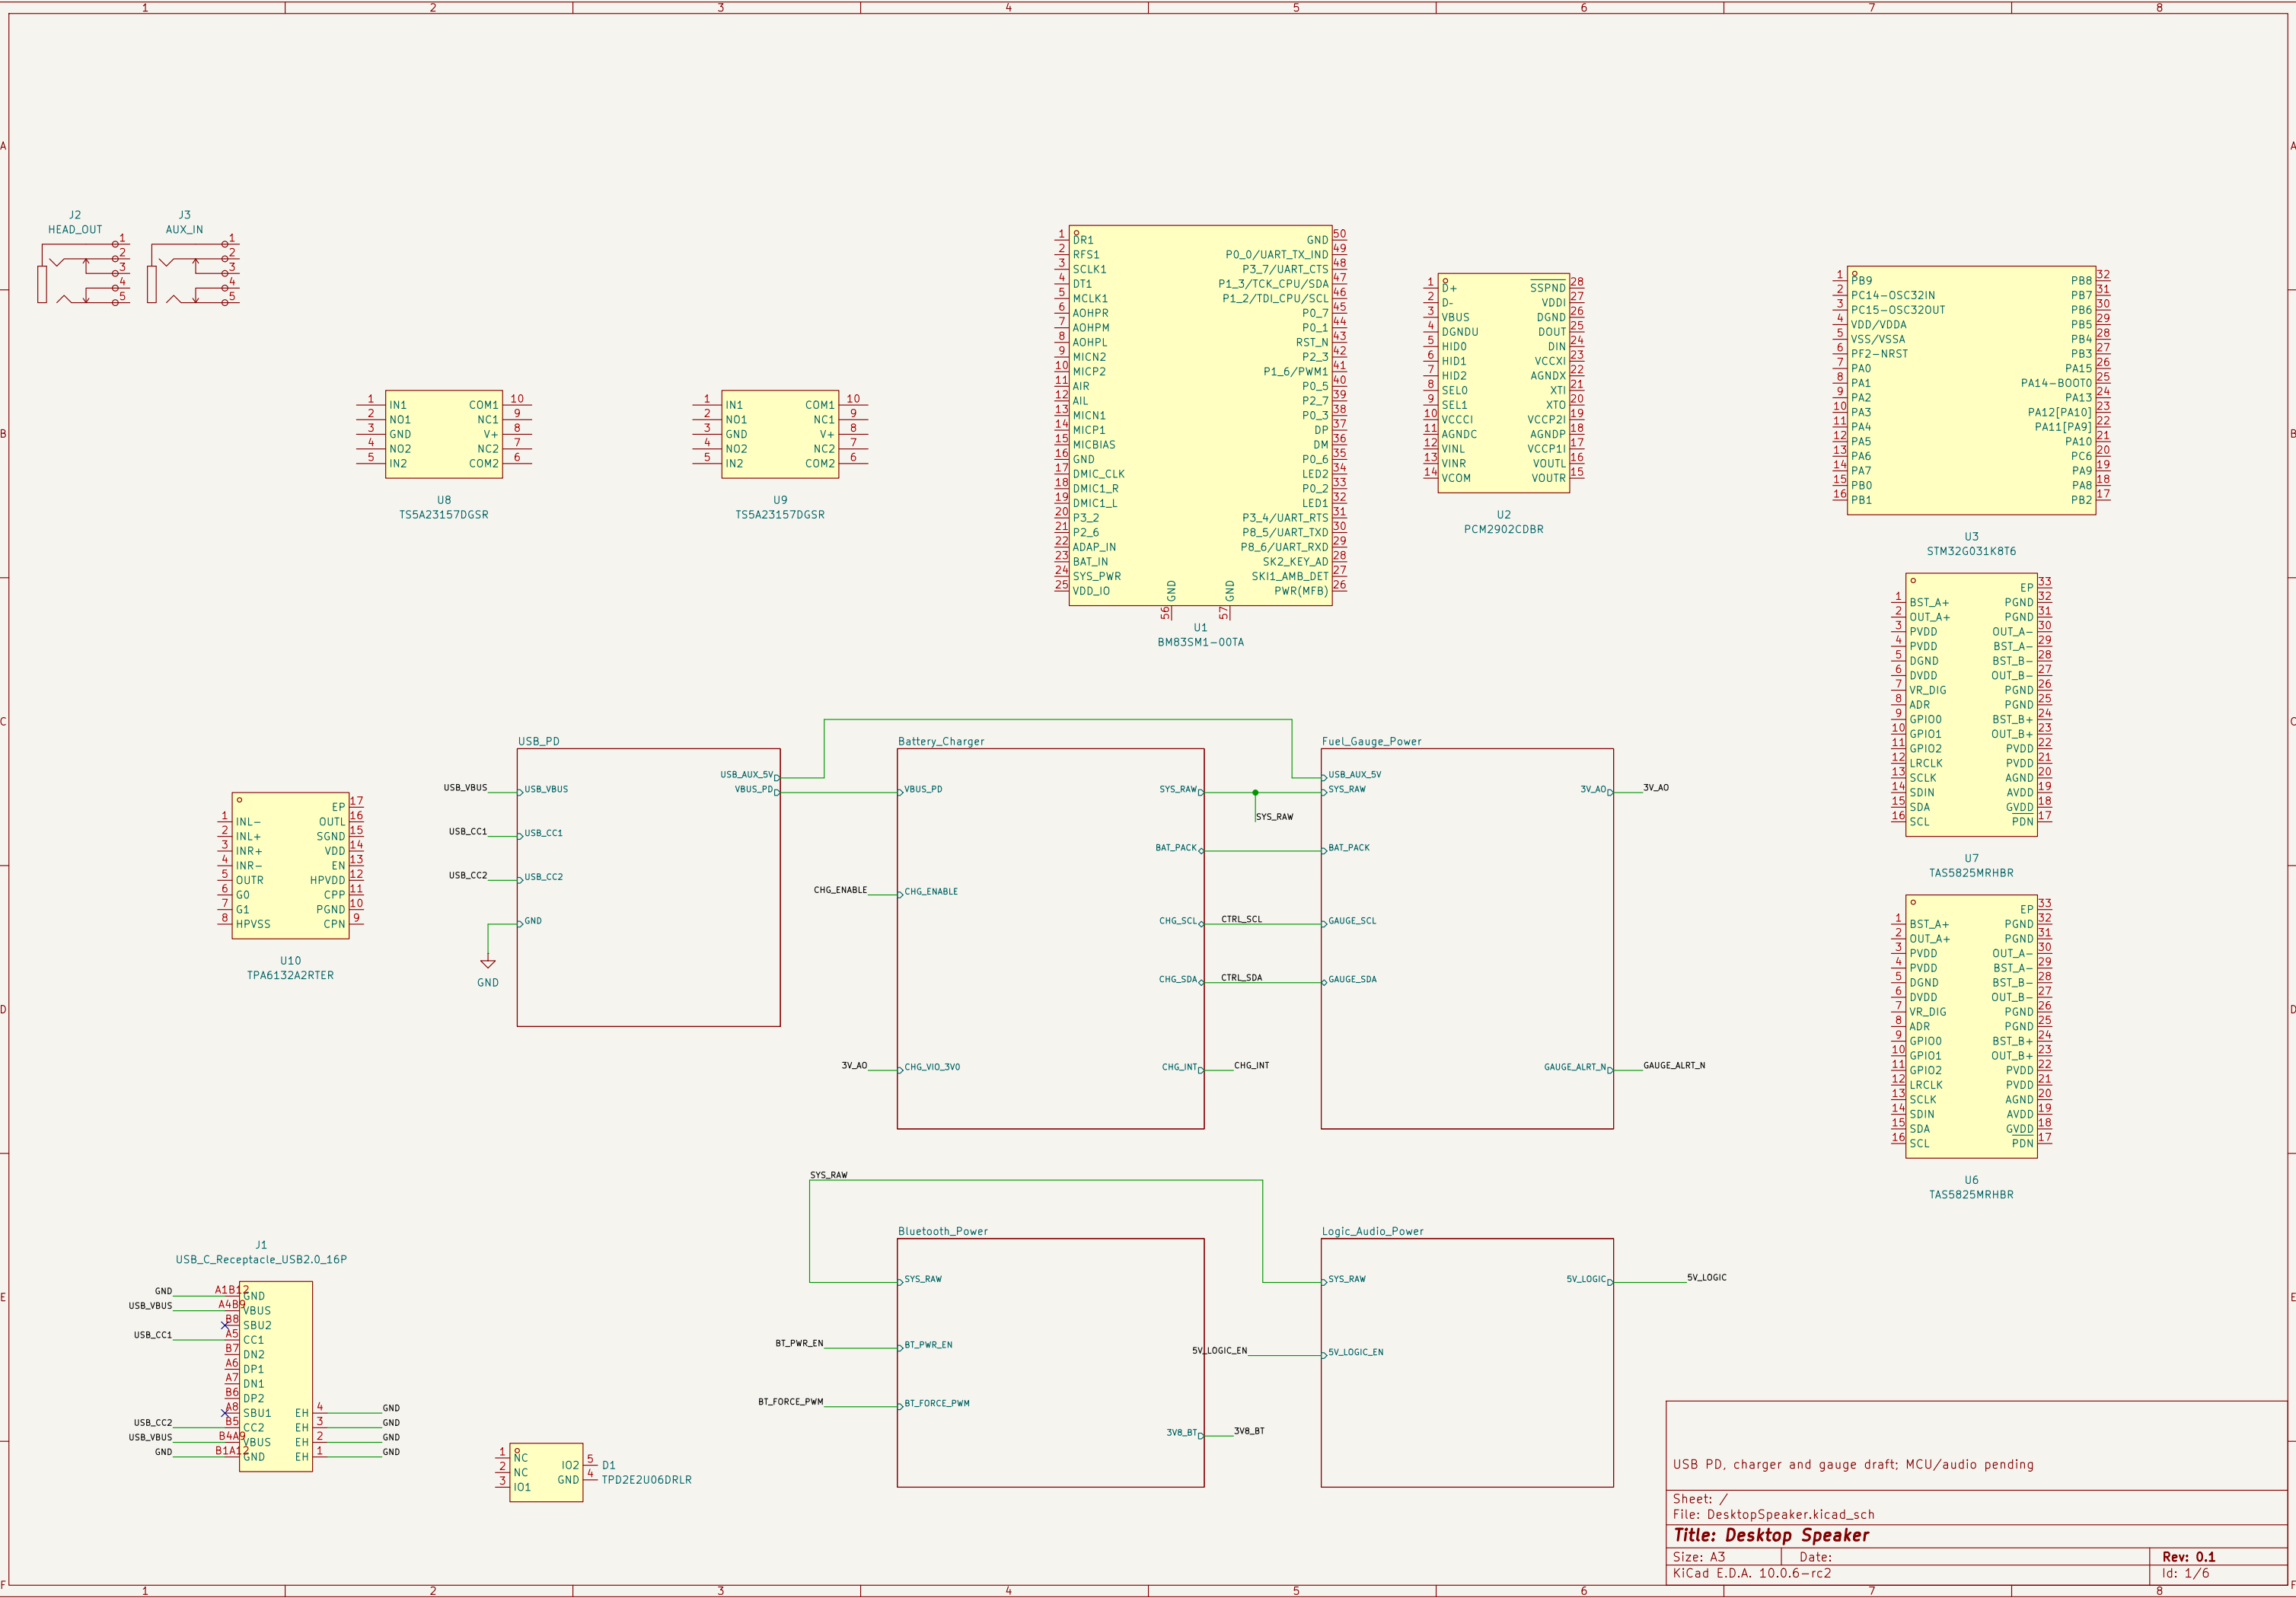

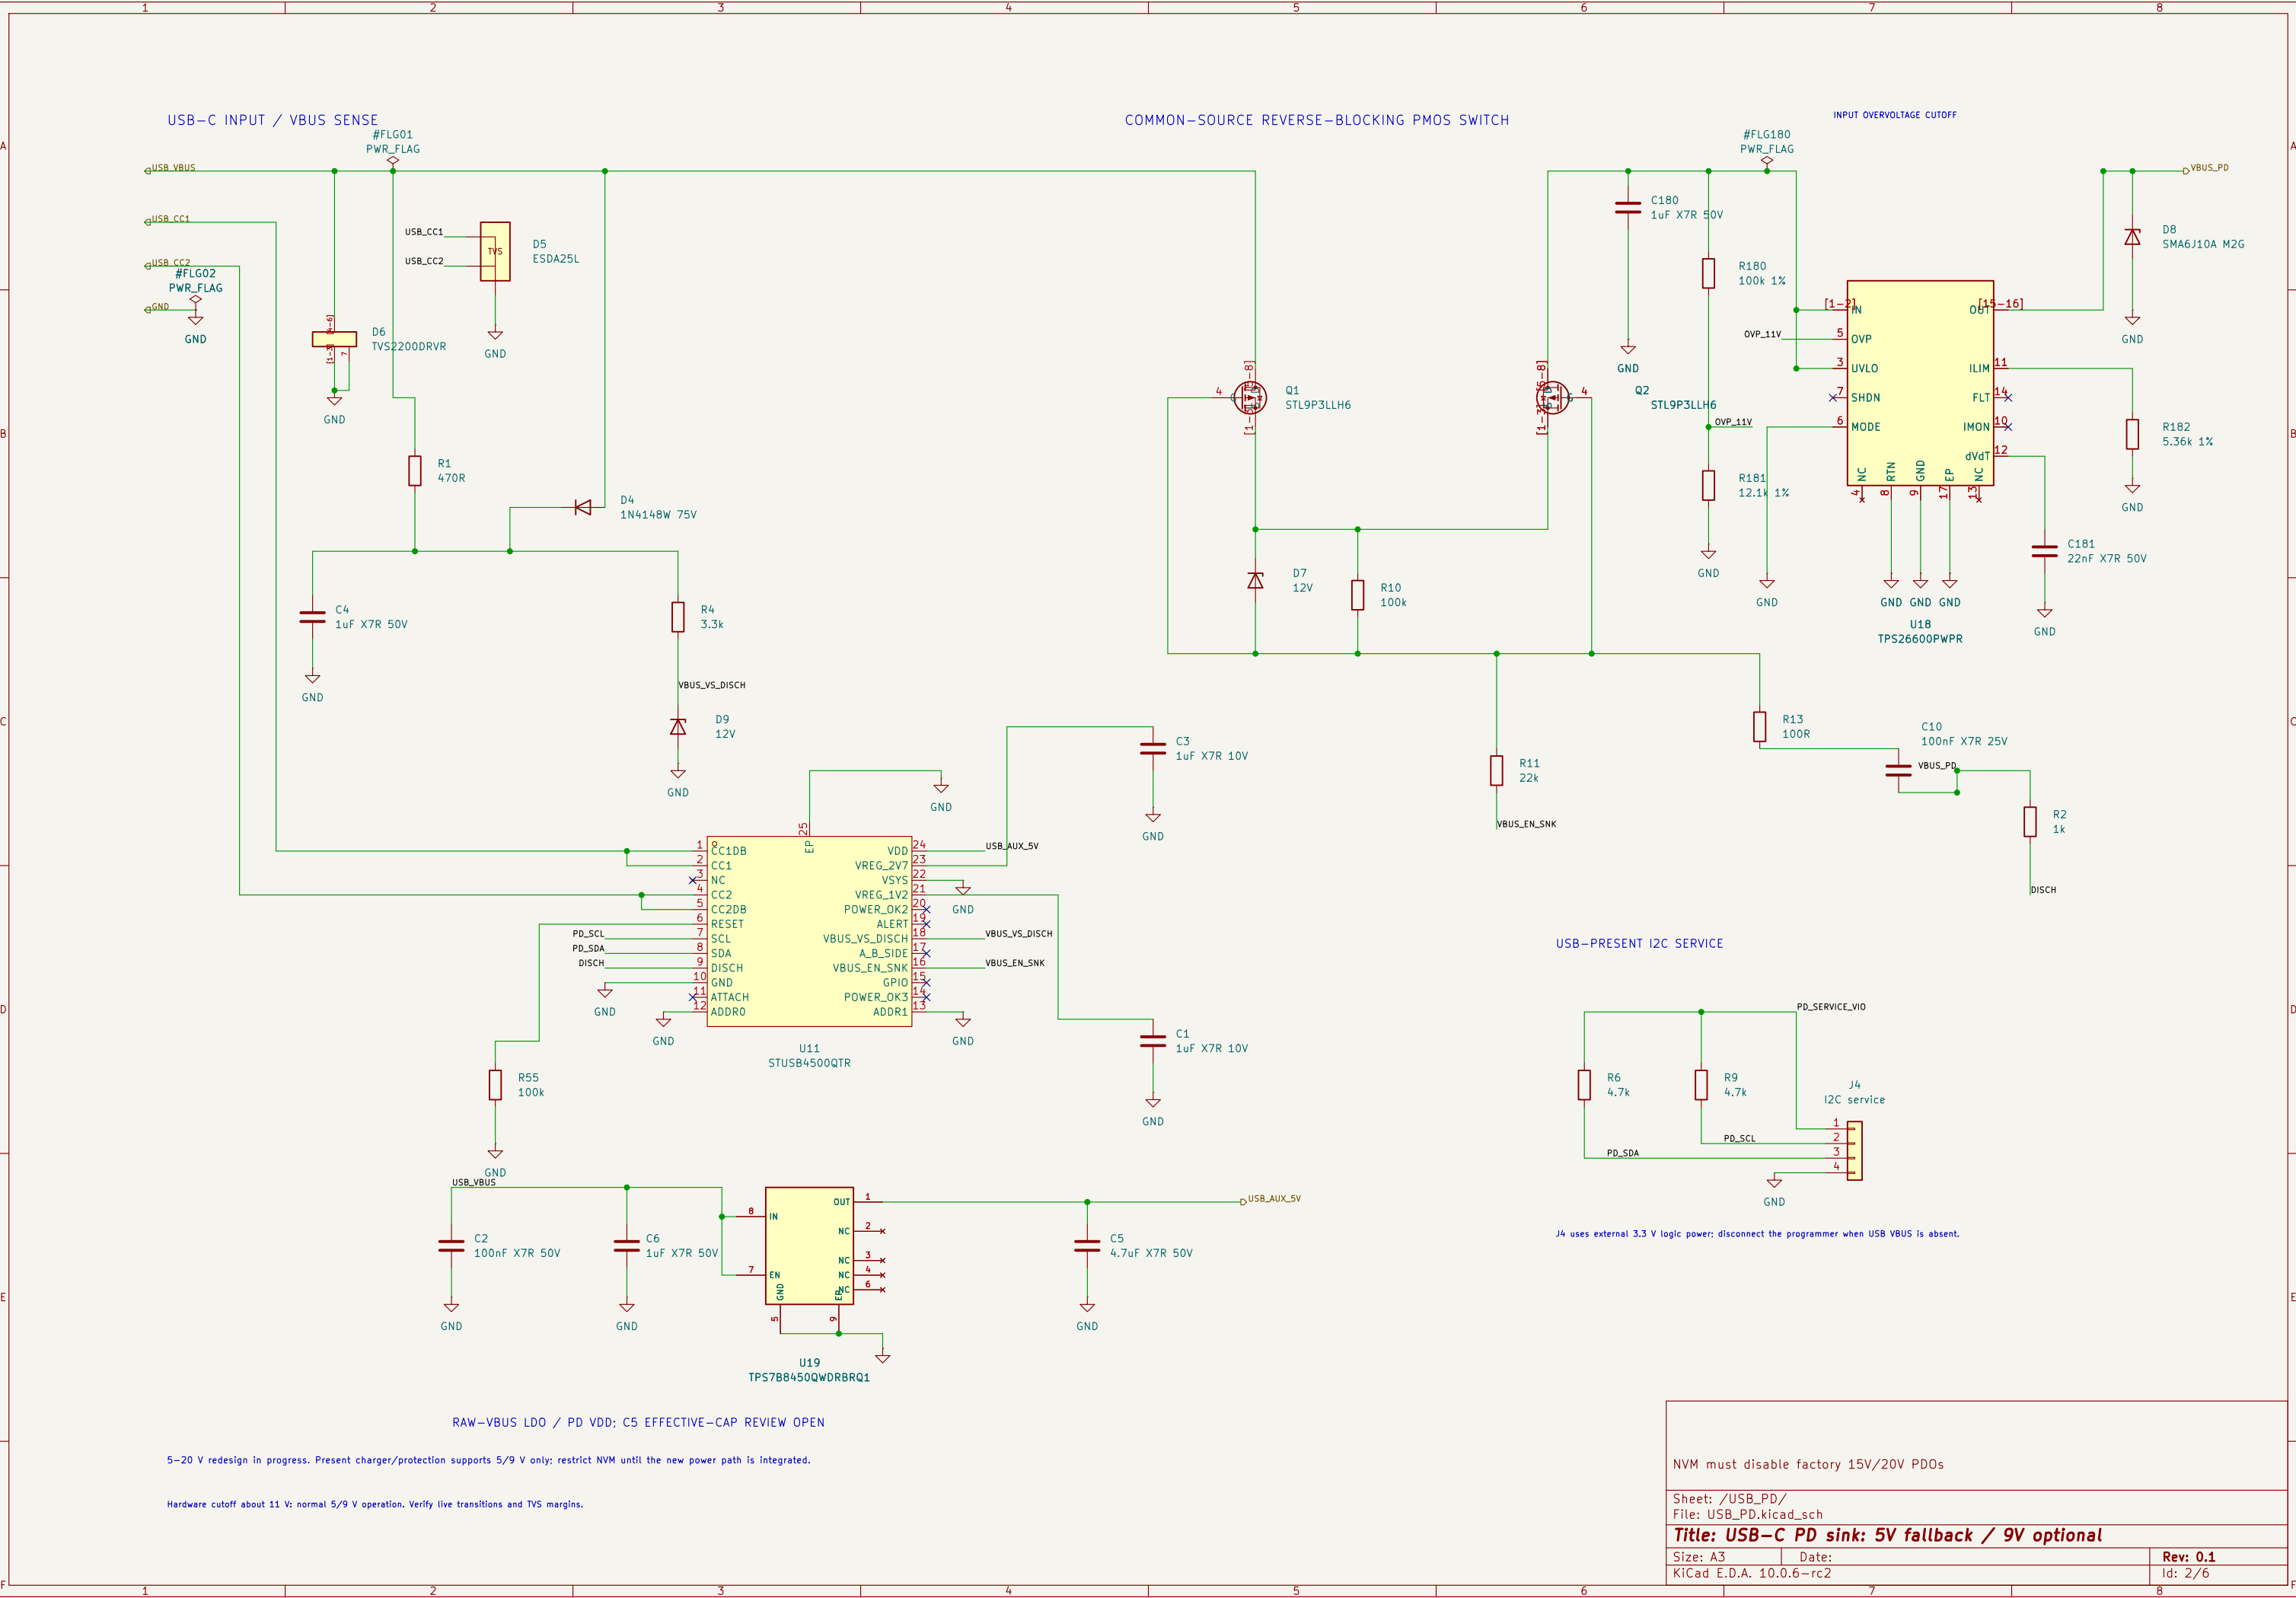

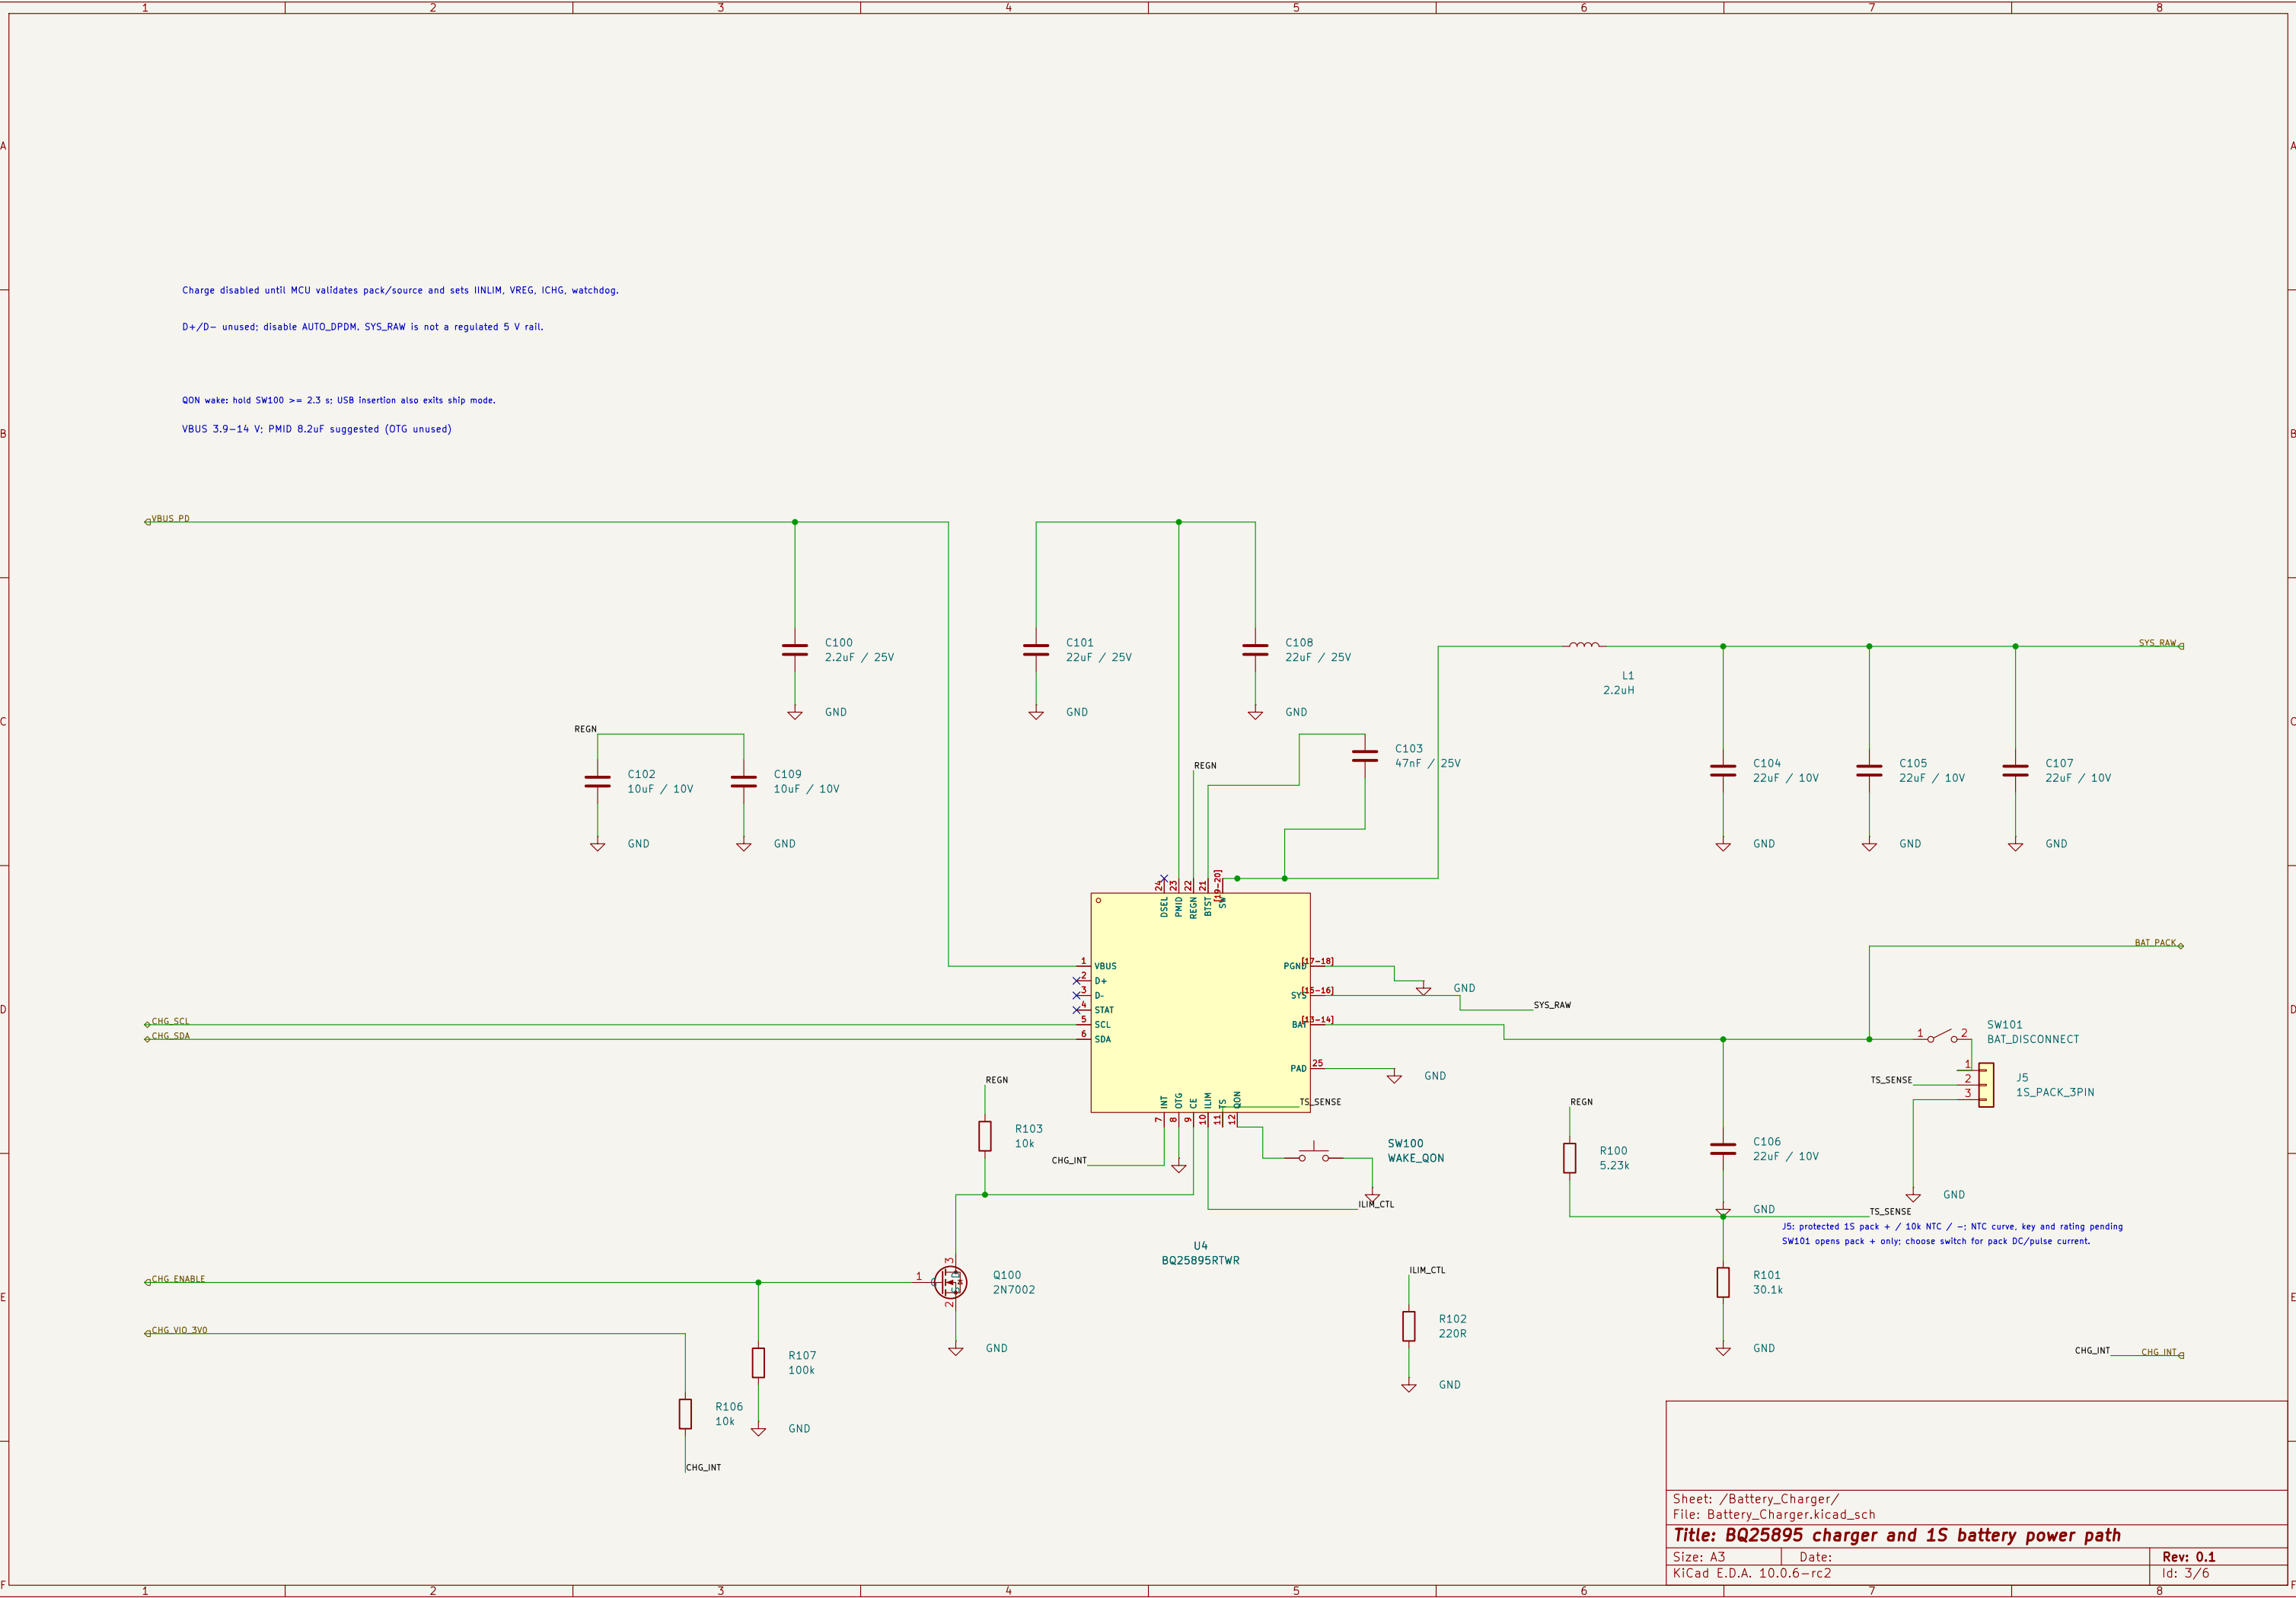

Rev: 0.1
Id: 4/6

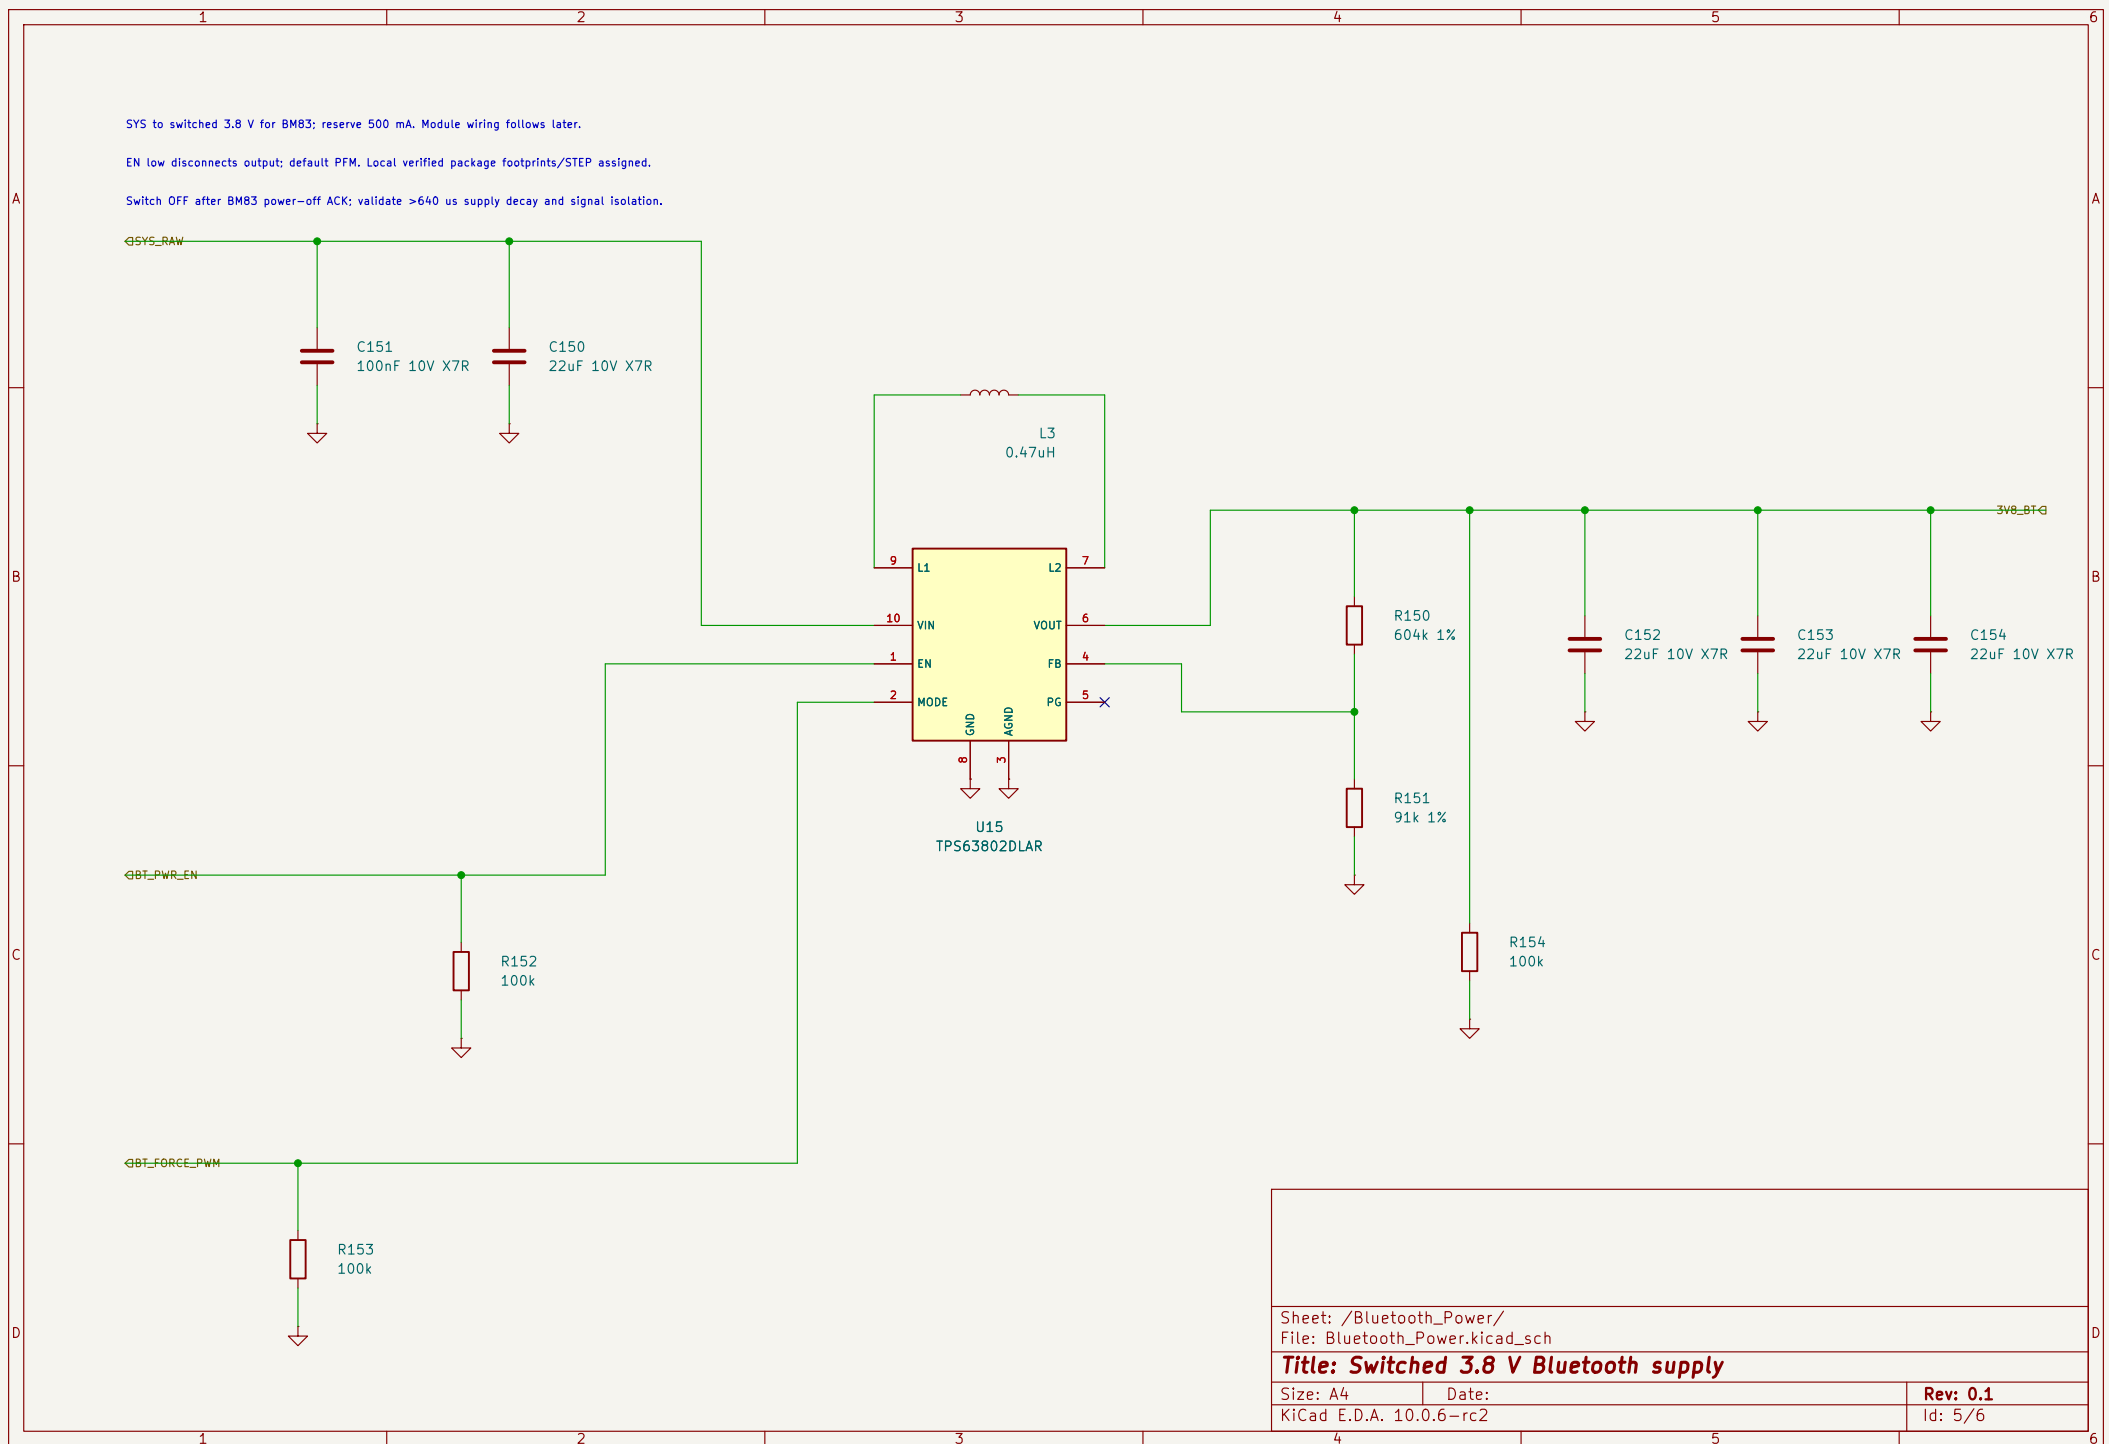

Protected 1S SYS to switched 5 V; reserve 500 mA total. Codec and other 5 V loads connect later.

EN low = true input/output disconnect; MODE tied to SYS_RAW forces PWM after soft-start.

Steady PWM divider DC bound is within PCM2902C limits; soft-start uses PFM. Ripple and startup transient require qualification.

