


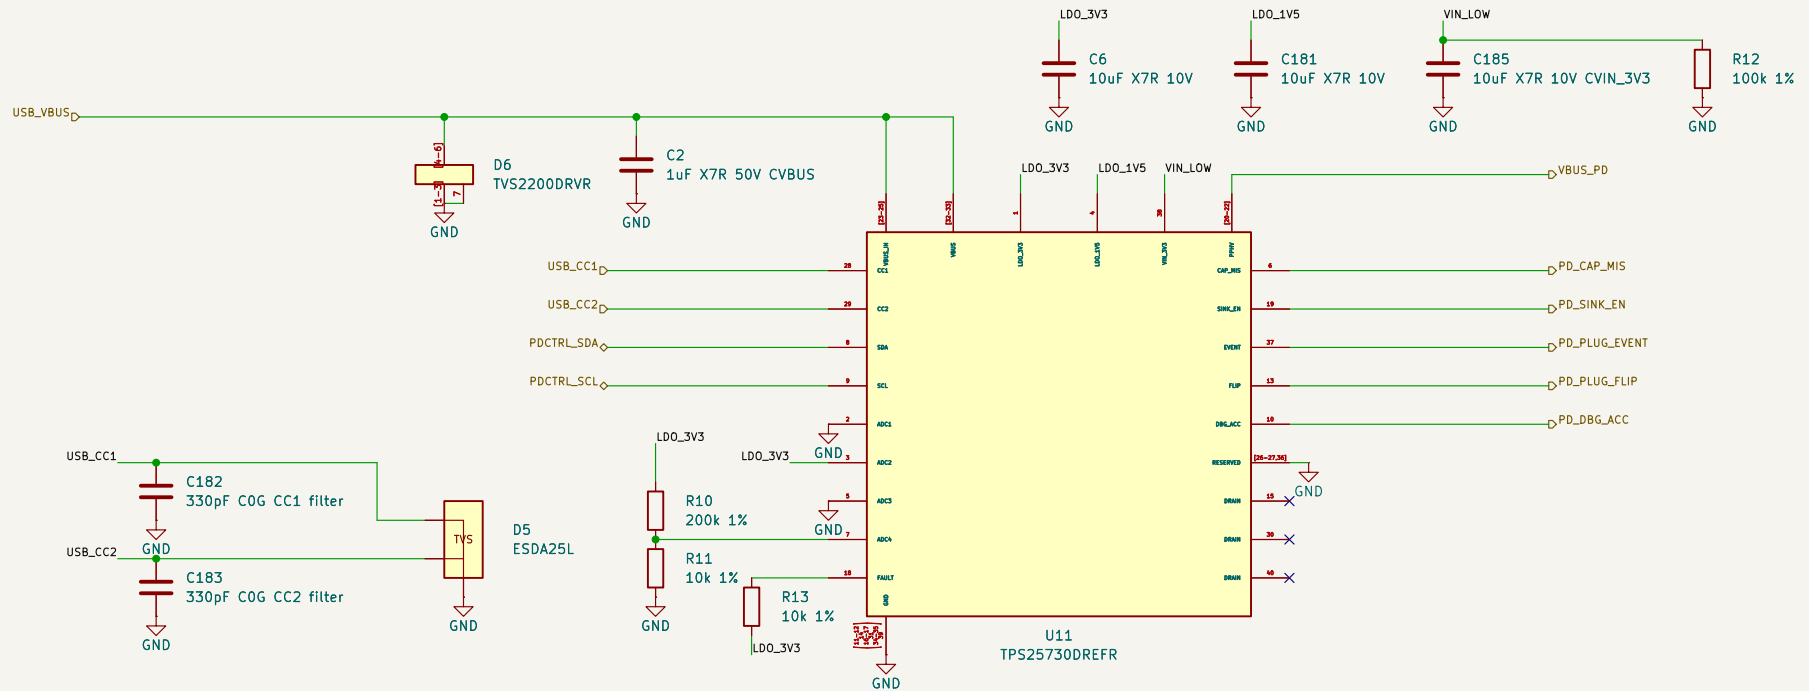


5–20V SPR; ADCIN2=7 selects maximum per TI EVM Guide.

Read accepted PDO/RDO before raising charger/load limits; 5V default is not 2A permission.

Enforce 100mA SDP attach policy; implement USB suspend separately.

Validate shared -50uF bank bias and ramps; details: ai-files/reports/5–20v–pd–front–end–review.md.

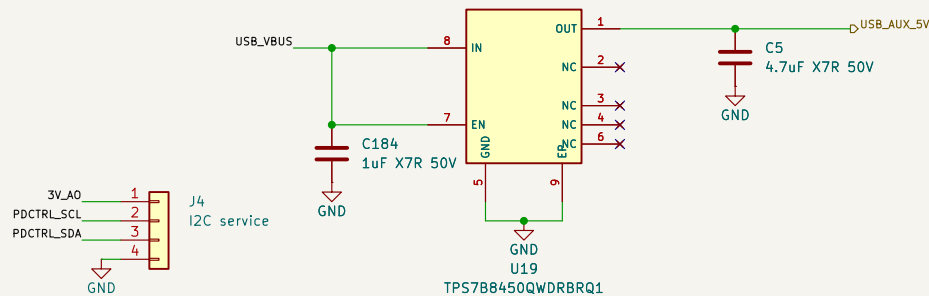

Sheet: /

File: TPS25730D_USB_PD_candidate.kicad_sch

Title: USB–C PD 5-20 V SPR – TPS25730D candidate

Size: A4

Date:

KiCad E.D.A. 10.0.6–rc2

Rev: prototype review

Id: 1/1