REV.		APPR. BY CUSTOMER	

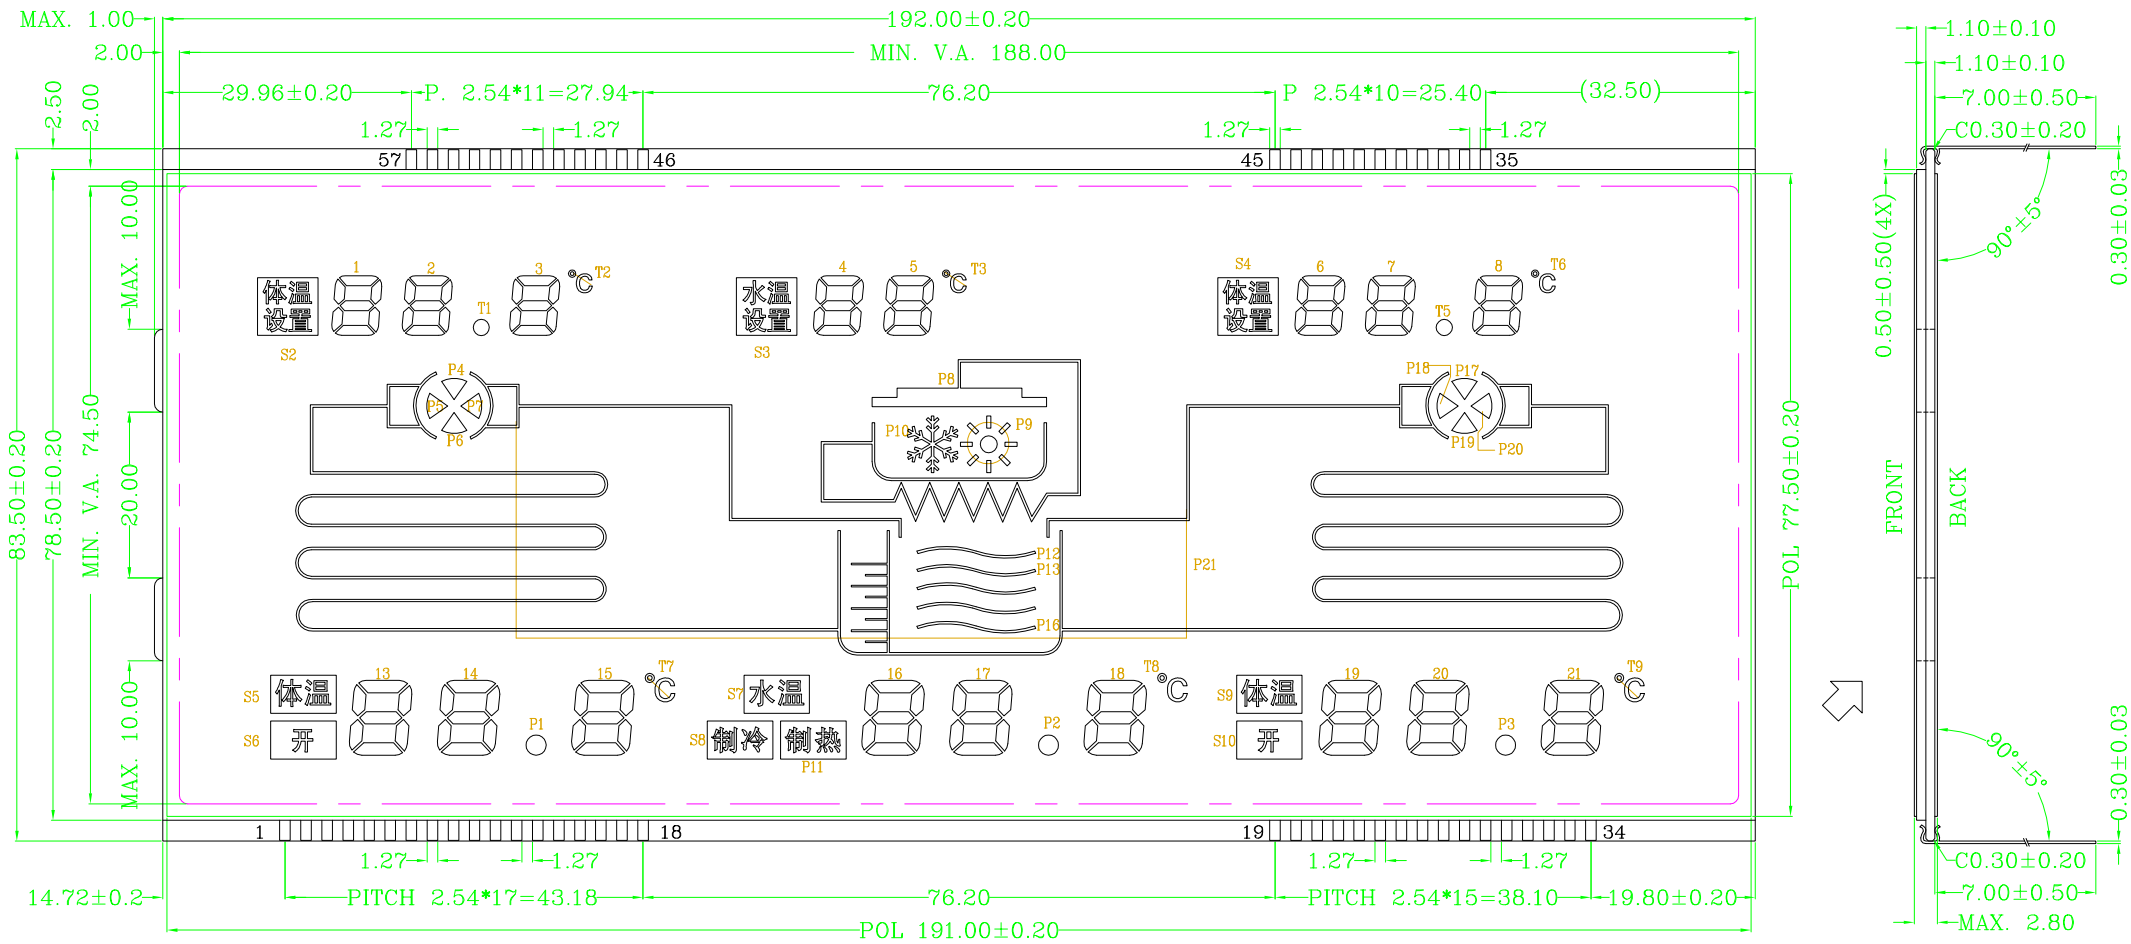

注：(1)红色标注尺寸为实际尺寸，请客户仔细核实；

(2)因玻璃模数较大，因生产工艺的要求封口改为两个，请核实是否可行，谢谢！

* ROHS COMPLIANCE *

CUSTOMER NAME	REV.	DESCRIPTION	DATE	TYPE	HTN,POSITIVE/TRANSMISSIVE
HK28B27				VIEWING DIRECTION	6 O'CLOCK (偏12点)
CUSTOMER P/N				DRIVING METHOD	1/4DUTY,1/3BIAS Vop=5.0V
				OPERATING TEMP.	-10°C TO +60°C
QTN NO.				STORAGE TEMP.	-20°C TO +70°C
HK6217052401				CONNECTION	PIN

THIRD ANGLE:

UNSPECIFIED: ± 0.2mm

UNSPECIFIED: ± 0.5°

MODEL NO.

JD-17169AA

深圳精东电子

DWG.	DATE	CHK.	DATE	APPR'D.	DATE	PAGE
WXF	17/05/26	dsy	17/05/26			1 OF 4

REV.		APPR. BY CUSTOMER	



(13-21) (2:1)



(1-12) (2:1)





PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
COM1	COM1	\	\		S5/T7/S7/T8/S9/T9	13F	13A	14F	14A	15F	15A	16F	16A	17F	17A	18F	18A	\	19F	19A	20F	20A	21F	21A
COM2	\	COM2	\		\	13G	13B	14G	14B	15G	15B	16G	16B	17G	17B	18G	18B	\	19G	19B	20G	20B	21G	21B
COM3	\	\	COM3		\	13E	13C	14E	14C	15E	15C	16E	16C	17E	17C	18E	18C	\	19E	19C	20E	20C	21E	21C
COM4	\	\	\	COM4	\	S6	13D	\	14D	P1	15D	S8	16D	P11	17D	P2	18D	\	S10	19D	\	20D	P3	21D

PIN	25	26	27	28	29	30	31	32	33	34
COM1	\	P19	P16	P8/P9	P5	P21	COM1	\	\	\
COM2	\	P18	P15	P10	P6	\	\	COM2	\	\
COM3	\	P20	P14	\	P4	\	\	\	COM3	\
COM4	\	P17	P13	P12	P7	\	\	\	\	COM4

PIN	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57
COM1	\				COM1	8A	8F	7A	7F	6A	6F	\	5A	5F	4A	4F	3A	3F	2A	2F	1A	1F	\
COM2	\			COM2		8B	8G	7B	7G	6B	6G	\	5B	5G	4B	4G	3B	3G	2B	2G	1B	1G	\
COM3	\		COM3			8C	8E	7C	7E	6C	6E	\	5C	5E	4C	4E	3C	3E	2C	2E	1C	1E	\
COM4	\	COM4				8D	T5	7D	T6	6D	T3/S4	\	5D	\	4D	T2/S3	3D	T1	2D	\	1D	S2	\

* ROHS COMPLIANCE *

CUSTOMER NAME	REV.	DESCRIPTION	DATE	TYPE	HTN,POSITIVE/TRANSMISSIVE
HK28B27				VIEWING DIRECTION	6 O'CLOCK (偏12点)
CUSTOMER P/N				DRIVING METHOD	1/4DUTY,1/3BIAS Vop=5.0V
				OPERATING TEMP.	-10°C TO +60°C
QTN NO.				STORAGE TEMP.	-20°C TO +70°C
HK6217052401				CONNECTION	PIN

THIRD ANGLE:

UNSPECIFIED: ± 0.2mm

UNSPECIFIED: ± 0.5°

MODEL NO.

JD-17169AA

深圳精东电子

DWG.	DATE	CHK.	DATE	APPR'D.	DATE	PAGE
WXF	17/05/26	dsy	17/05/26			2 OF 4

REV.		APPR. BY CUSTOMER	

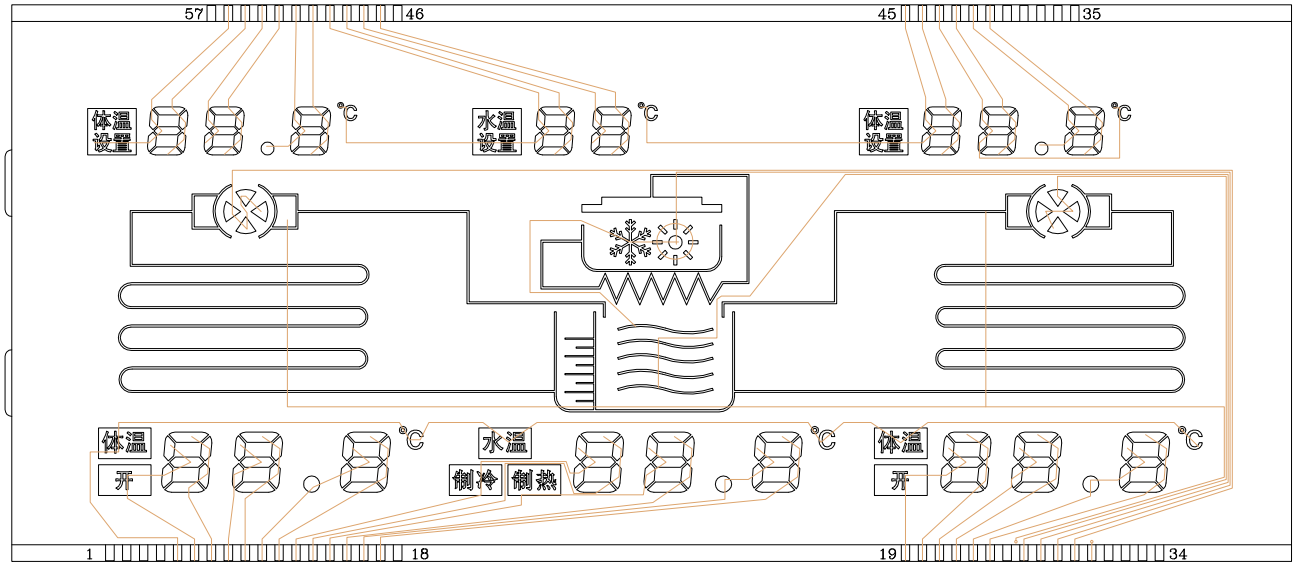

SEGMENT

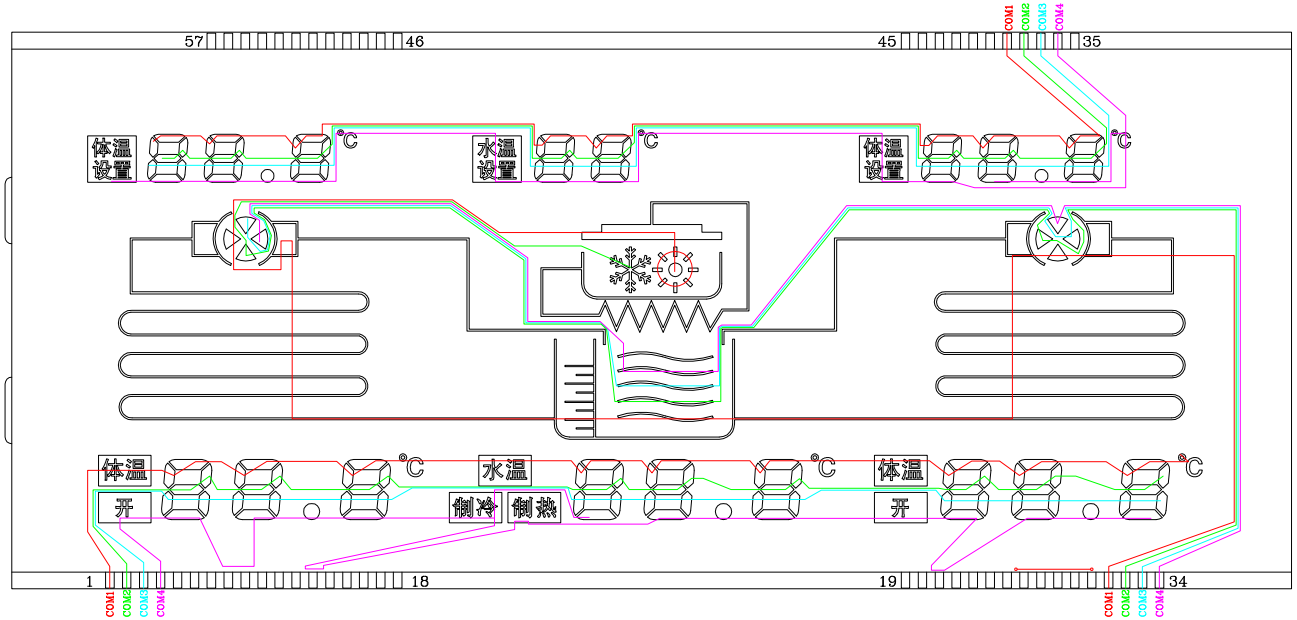

COMMON

* ROHS COMPLIANCE *

CUSTOMER NAME	REV.	DESCRIPTION	DATE	TYPE	HTN,POSITIVE/TRANSMISSIVE
HK28B27				VIEWING DIRECTION	6 O'CLOCK (偏12点)
CUSTOMER P/N				DRIVING METHOD	1/4DUTY,1/3BIAS Vop=5.0V
				OPERATING TEMP.	-10°C TO +60°C
QTN NO.				STORAGE TEMP.	-20°C TO +70°C
HK6217052401				CONNECTION	PIN

THIRD ANGLE:

UNSPECIFIED: ± 0.2mm

UNSPECIFIED: ± 0.5°

MODEL NO.

JD-17169AA

深圳精东电子

DWG.	DATE	CHK.	DATE	APPR'D.	DATE	PAGE
WXF	17/05/26	dsy	17/05/26			3 OF 4

REV.

APPR. BY CUSTOMER

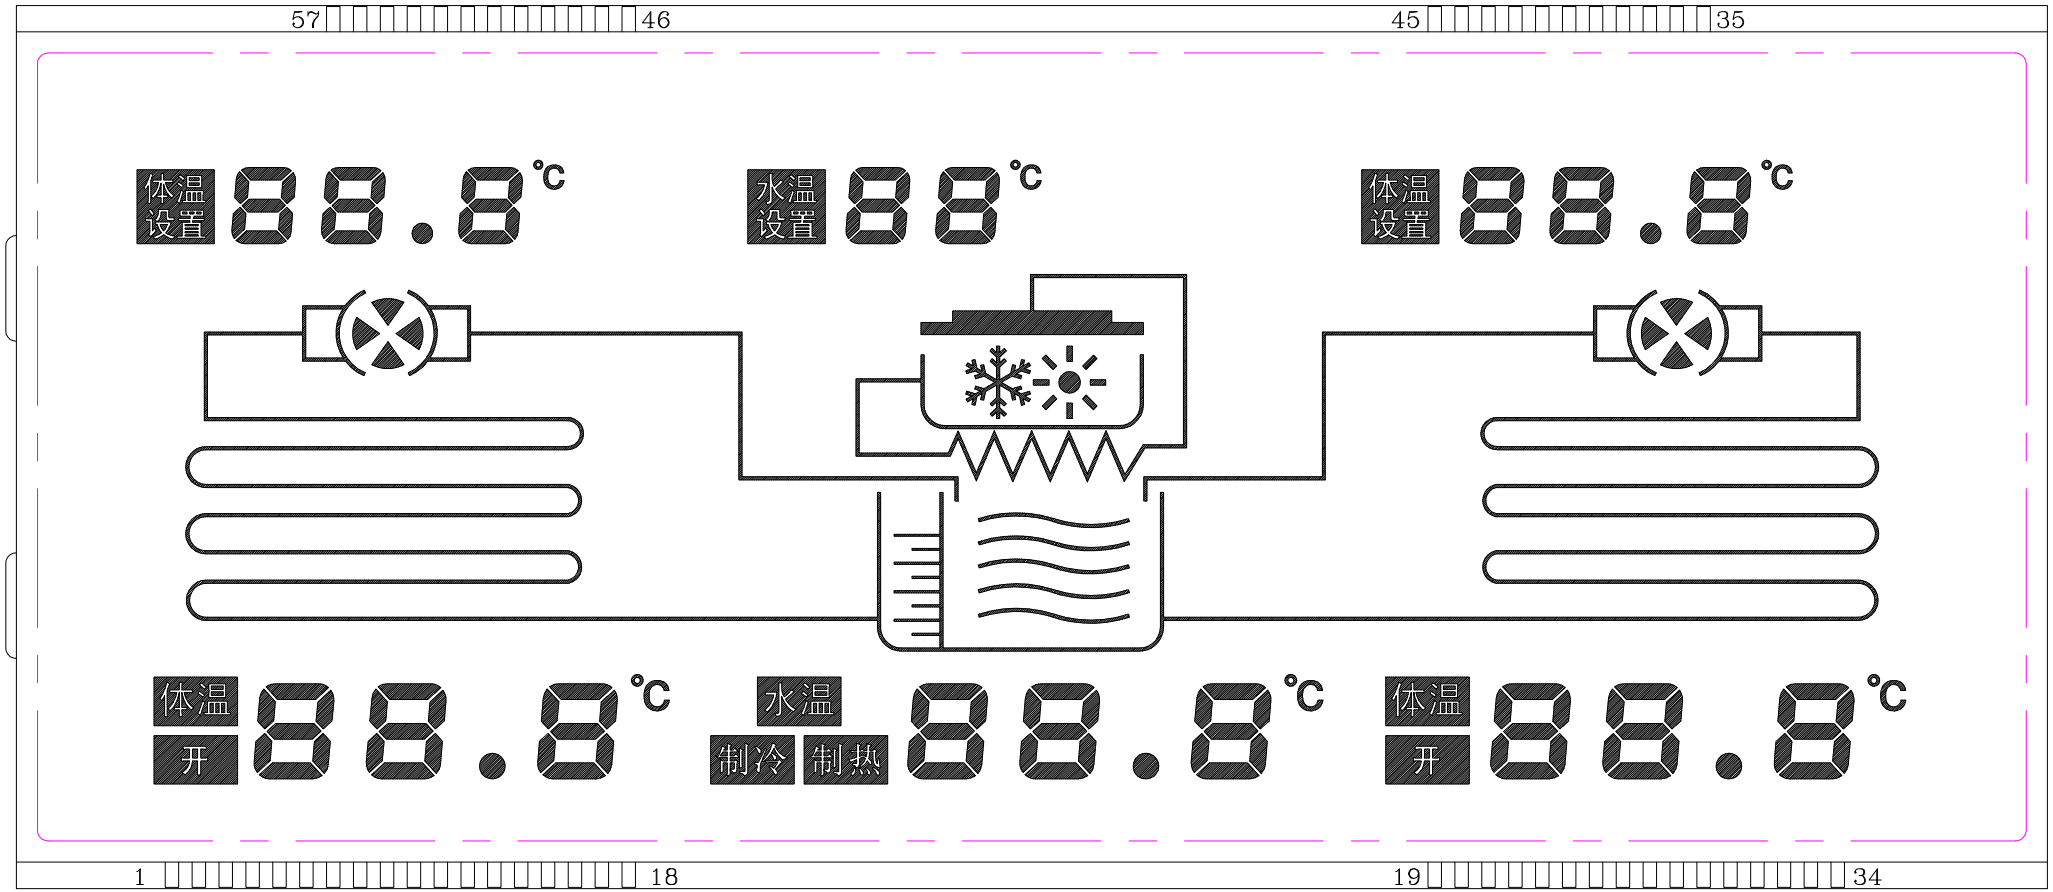

Show the result diagram

* ROHS COMPLIANCE *														
CUSTOMER NAME	REV.	DESCRIPTION	DATE	TYPE	HTN,POSITIVE/TRANSMISSIVE	THIRD ANGLE:	MODEL NO.	深圳精东电子						
HK28B27				VIEWING DIRECTION	6 O'CLOCK (偏12点)		JD-17169AA							
CUSTOMER P/N				DRIVING METHOD	1/4DUTY,1/3BIAS Vop=5.0V	UNSPECIFIED: ± 0.2mm								
				OPERATING TEMP.	-10°C TO +60°C									
QTN NO.				STORAGE TEMP.	-20°C TO +70°C	UNSPECIFIED: ± 0.5°	DWG.	DATE	CHK.	DATE	APPR'D.	DATE	PAGE	
HK6217052401				CONNECTION	PIN		WXF	17/05/26	dsy	17/05/26			4 OF 4	