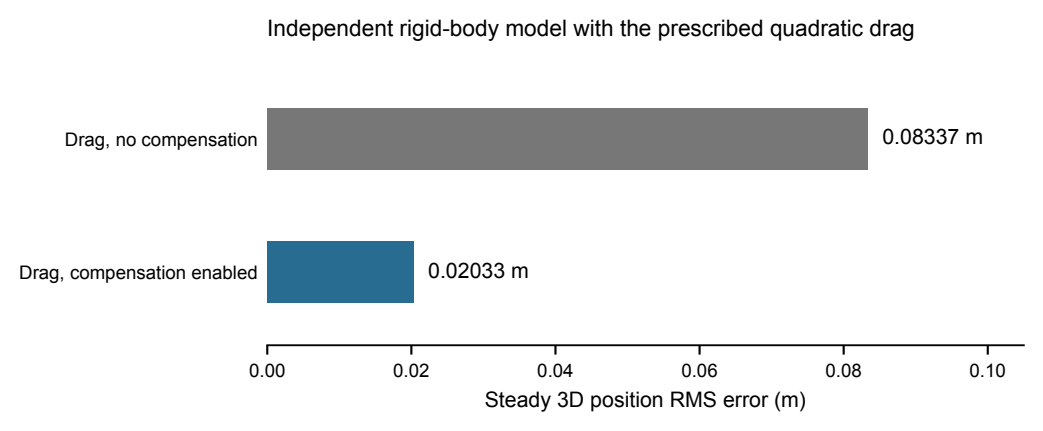
Independent rigid-body model with the prescribed quadratic drag
Drag, no compensation
0.08337 m
Drag, compensation enabled
0.02033 m
0.00
0.02
0.04
0.06
0.08
0.10
Steady 3D position RMS error (m)