

# Attention-LSTM Enhanced Risk-Aware Vertical Handoff Algorithm for UAV Remote Sensing Heterogeneous Networks

**Abstract** Unmanned aerial vehicle (UAV) remote-sensing systems support large-area Earth observation, including disaster assessment and environmental monitoring. During cruise missions, UAVs frequently cross fifth-generation (5G), Long-Term Evolution (LTE), and Wi-Fi coverage boundaries, creating vertical-handover (VHO) challenges involving decision latency, ping-pong handovers, and fixed attribute weights that cannot adapt to changing flight phases. This study proposes the long short-term memory (LSTM)-attention-based adaptive vertical handover algorithm (LAAVHA) and further develops the attention-LSTM enhanced risk-aware vertical handoff algorithm (ALERA) using adaptive dynamic hysteresis (ADH) and a risk-sensitive technique for order preference by similarity to the ideal solution (RS-TOPSIS). LAAVHA integrates stacked-LSTM state prediction, attention-based dynamic weighting, improved TOPSIS ranking, and dual-hysteresis decision-making. The stacked LSTM predicts short-term candidate-network states, while attention generates dynamic attribute weights from current network states and mobility features. Current and predicted states are then fused for TOPSIS ranking, followed by dual hysteresis based on a closeness-score advantage threshold and a consecutive-confirmation window to suppress unnecessary handovers. ADH adapts these hysteresis parameters to flight speed and serving-network channel fluctuations, while RS-TOPSIS penalizes volatile closeness scores to improve candidate ranking. Both enhancements operate after the base scores are generated and before the final handover decision, improving adaptation to channel fluctuations and decision robustness without modifying the LSTM-attention architecture or training process. Simulation results demonstrate reduced unnecessary handovers, improved decision efficiency, sustained remote-sensing data continuity, and greater robustness to abrupt channel variations.

**Keywords:** UAV remote sensing; heterogeneous network; vertical handover; LSTM; attention mechanism; adaptive hysteresis; risk-sensitive TOPSIS

## 0 Introduction

UAV remote sensing supports disaster assessment, agricultural surveying, and environmental monitoring. High-resolution optical and multispectral sensors generate large image volumes that require real-time transmission via heterogeneous wireless networks, including 5G, LTE, and Wi-Fi <sup>[1–3]</sup>. UAV mobility frequently crosses coverage boundaries, necessitating VHOs <sup>[4–6]</sup>. Existing VHO methods mainly employ multiple attribute decision making (MADM) <sup>[7]</sup>, including the technique for order preference by similarity to the ideal solution (TOPSIS) <sup>[8–10]</sup>, Visekriterijumska Optimizacija I Kompromisno Resenje (VIKOR, multi-criteria optimization and compromise solution) <sup>[11]</sup>, and the Grey relational analysis (GRA), complex proportional assessment (COPRAS), stable preference ordering toward ideal solution (SPOTIS), and simple additive weighting (SAW) methods <sup>[12]</sup>. Fuzzy-VHO applies fuzzy inference to handover decisions <sup>[4]</sup>. These approaches have two main limitations. First, weights are typically fixed using entropy weighting or the analytic hierarchy process <sup>[12–15]</sup>, limiting adaptation to varying flight phases and channel conditions. Second, decisions rely on current network indicators without predicting future states, potentially delaying handovers until link failure when a UAV approaches Wi-Fi coverage limits <sup>[16–17]</sup>. Deep reinforcement learning

improves handover decisions <sup>[16–18]</sup>, but remains limited by black-box decision-making and unstable training, which undermine interpretability and reliability in safety-critical remote-sensing missions.

LSTM networks alleviate vanishing gradients through gated structures <sup>[19]</sup> and capture long-range temporal dependencies. They have been applied to handover decisions and network-state prediction in 5G heterogeneous networks <sup>[20–22]</sup>. However, a single LSTM has two limitations. It treats the five network-state indicators as independent temporal series, failing to model their coupling, such as the negative correlation between throughput and packet loss and the relationship between signal-to-interference-plus-noise ratio (SINR) and delay. Moreover, its predictions still depend on fixed or manually assigned attribute weights, limiting adaptation to flight phase and mobility state.

VHO in UAV remote-sensing heterogeneous networks involves two key challenges. Conventional MADM methods use fixed weights and lack temporal prediction, while a single LSTM network cannot dynamically adjust attribute weights. Moreover, signal fluctuations are minor during steady flight but can intensify near coverage boundaries or obstacles, making fixed thresholds and confirmation windows unsuitable for both conditions. Limited algorithmic adaptability therefore increases handover instability, while dynamic environments require greater environmental awareness.


To address these related challenges, this paper proposes a layered solution. At the algorithm level, LAAVHA integrates LSTM networks and attention mechanisms to overcome the fixed weighting and limited temporal prediction of conventional MADM methods. LAAVHA comprises three stages: prediction, weighting, and decision. A stacked LSTM predicts short-term changes in candidate networks; self-attention combines the current network-state matrix with mobility features, such as flight speed and altitude, to derive dynamic attribute weights; and an improved TOPSIS matrix integrates current and predicted states. Candidate ranking and handover decisions are stabilized through dual hysteresis based on a TOPSIS closeness-score advantage threshold and a consecutive-confirmation window. Dynamic weighting and predictive modeling enable stable candidate evaluation during UAV remote-sensing missions. These missions involve wide-area flight, rapid traversal of 5G/LTE/Wi-Fi coverage boundaries, abrupt channel variations caused by boundaries or obstructions, and continuous transmission of high-resolution imagery. To address these conditions, ADH and RS-TOPSIS are integrated into LAAVHA, forming ALERA.

ADH overcomes the limitations of fixed thresholds and confirmation windows in balancing handover stability and responsiveness. It measures channel variation using the standard deviation of serving-network SINR over the latest five decision periods and adjusts handover conditions according to flight speed. Higher channel variation increases the score-advantage threshold to suppress transient disturbances, whereas higher speed shortens the confirmation window to enable timely handovers near rapidly changing coverage boundaries. Therefore, ADH maintains responsiveness under stable conditions while improving anti-chattering capability during severe channel fluctuations. In addition, RS-TOPSIS mitigates the risk of selecting candidates with high current scores but unstable recent performance. It retains the latest five TOPSIS closeness scores, computes their standard deviation, and applies a variation-based risk penalty to the current closeness score. The resulting robust score captures both instantaneous performance and historical stability, preventing transient peaks in volatile channels from triggering false handovers.

Simulation results show that LAAVHA achieves the lowest mean handover count (0.24) among 11 algorithms, reducing handovers by 84.8% – 99.1% versus eight baselines; 38 of 50 runs require no handover. Removing the LSTM prediction or attention-based dynamic-weight branch increases the count to 1.08 and 2.00, respectively, confirming their complementary roles in handover stability. ALERA completes all necessary handovers during sustained link degradation while producing no false handovers under transient fluctuations, whereas a fixed low-threshold scheme causes two additional ping-pong handovers. These results demonstrate that ADH and RS-TOPSIS enhance robustness under channel fluctuations without suppressing necessary handovers.

# 1 Network Scenario and Network-State Parameters

A UAV remote-sensing mission is considered over a  $2000 \text{ m} \times 2000 \text{ m}$  area, with a UAV following a predefined route at  $50 - 150 \text{ m}$  altitude and  $5 - 30 \text{ m/s}$  cruise speed. Wi-Fi, LTE, and 5G serve as candidate networks with different coverage ranges and deployment densities. Wi-Fi hotspots have an approximate  $200 \text{ m}$  radius and are placed near ground stations and key imaging sites. LTE base stations provide  $1 - 2 \text{ km}$  coverage and are sparsely deployed along the route. 5G base stations, with an approximate  $500 \text{ m}$  radius, are concentrated in the eastern data-aggregation area, offering high-rate access but incomplete coverage continuity. The UAV periodically collects the state of each candidate network for handover decisions [23].

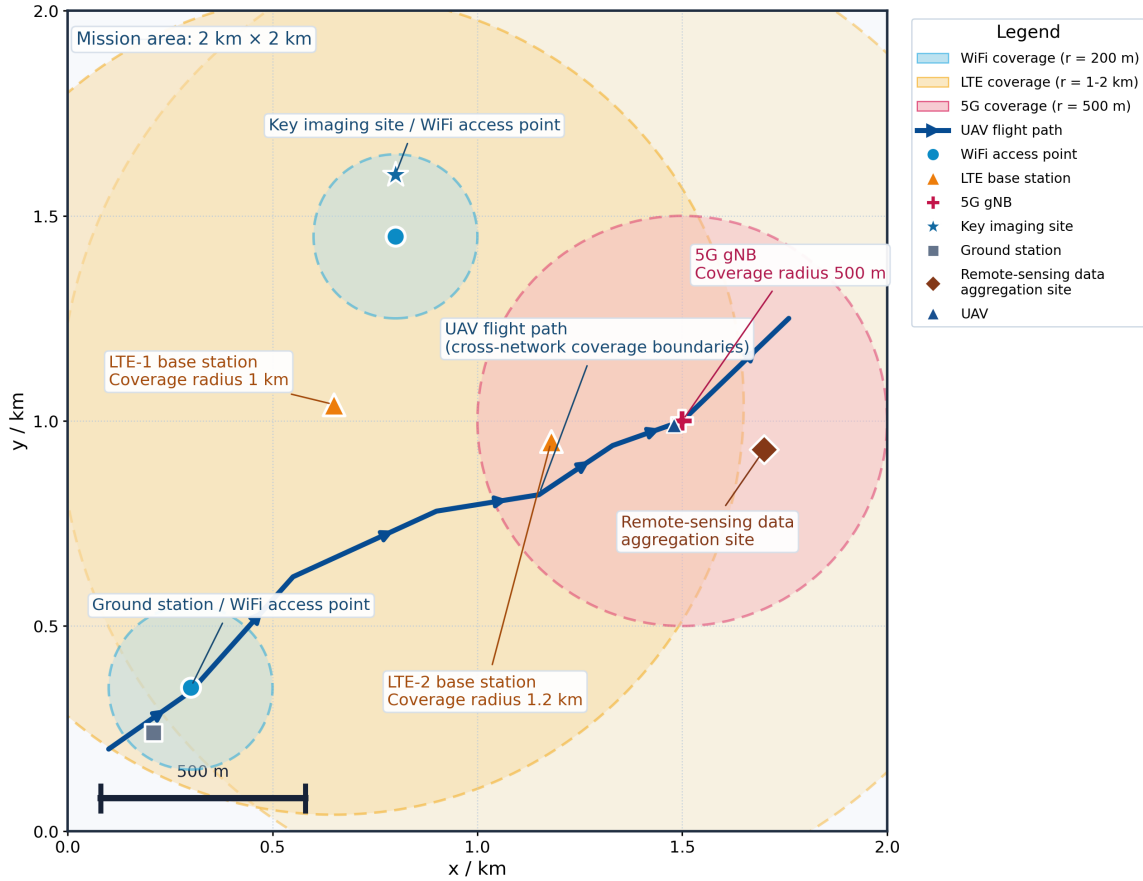

**Figure 1.** Heterogeneous-network coverage and UAV trajectory in the remote-sensing area.

Wi-Fi, LTE, and 5G provide overlapping coverage at different scales (Figure 1). Wi-Fi hotspots mainly serve ground stations and key imaging sites; LTE base stations offer relatively continuous wide-area connectivity; and 5G base stations provide high-rate transmission within the eastern data-aggregation area but with limited coverage continuity. The 5G next generation Node B (gNB) provides 5G coverage, radio-resource scheduling, and high-rate data transmission. As the UAV follows its route, it traverses overlapping coverage areas and requires VHO when the serving network degrades; another candidate offers better overall performance. The coverage scales correspond to the specified radii and define the basis for subsequent network-state collection and candidate evaluation.

For candidate network  $i$ , the state vector at time  $t$  is defined as:

$$S_i(t) = [\text{SINR}_i(t), \text{RSRP}_i(t), D_i(t), T_i(t), \text{PLR}_i(t)], \quad (1)$$

where  $\text{SINR}_i(t)$ ,  $\text{RSRP}_i(t)$ ,  $D_i(t)$ ,  $T_i(t)$ , and  $\text{PLR}_i(t)$  denote the SINR, reference signal received power, end-


to-end delay, throughput, and packet loss ratio of candidate  $i$  at time  $t$ , respectively. These five indicators characterize candidate-network performance from complementary perspectives. As the UAV moves from a Wi-Fi hotspot toward the mission-area boundary,  $\text{SINR}_i(t)$  typically declines from tens of decibels toward the noise floor, reflecting signal degradation caused by distance and obstruction and providing a direct handover cue.  $\text{RSRP}_i(t)$ , together with  $\text{SINR}_i(t)$ , determines whether the link budget meets the demodulation threshold; below receiver sensitivity, reliable physical-layer connectivity cannot be established even with acceptable SINR. The delay  $D_i(t)$  represents the round-trip time of a packet between the ground station and UAV application layer, affecting flight-control responsiveness and safety margins during high-speed cruise. Throughput  $T_i(t)$  measures deliverable payload bits per unit time; insufficient throughput prevents high-resolution images, which can reach several megabytes, from being transmitted during a single overflight. While  $\text{PLR}_i(t)$  reflects transmission reliability, even with adequate signal strength and throughput, high  $\text{PLR}_i(t)$  can cause stripes or block artifacts in reconstructed images.  $\text{SINR}_i(t)$ ,  $\text{RSRP}_i(t)$ , and  $T_i(t)$  are benefit criteria, whereas  $D_i(t)$  and  $\text{PLR}_i(t)$  are cost criteria. Min-max normalization maps all indicators to  $[0, 1]$ , where larger normalized values indicate better performance<sup>[11]</sup>.

Equation (1) provides the common input interface for the subsequent algorithm chain. Stacking  $S_i(t)$  for the three candidates at time  $t$  forms the current-state matrix  $S_{\text{cur}} \in \mathbf{R}^{3 \times 5}$ , which feeds the attention-based weight-generation module (Section 2.2). Stacking one candidate's states over 10 consecutive decision periods forms the historical-state tensor  $X_k \in \mathbf{R}^{10 \times 5}$ , which feeds the stacked-LSTM prediction module (Section 2.1). Therefore, the network-state parameters in Section 1 capture both cross-candidate differences and the short-term evolution of individual networks induced by UAV mobility.


UAV motion continuously changes candidate signal and transmission performance. Relying only on current indicators may prevent timely handover near coverage edges, increasing link-interruption risk and degrading service continuity; UAV cellular-network coverage and handover characteristics are discussed in<sup>[23]</sup>. Recent work has also investigated 5G ping-pong handover suppression through self-optimization<sup>[24]</sup>. Accordingly, the algorithm uses network states from recent decision periods as temporal inputs to predict short-term future states and combines them with the current state for the final handover decision.

## 2 LAAVHA Adaptive Vertical Handover Algorithm

Based on the network scenario and state parameters (Section 1), this section proposes LAAVHA, an adaptive VHO algorithm that integrates LSTM and an attention mechanism. It overcomes the fixed weighting and lack of temporal prediction in conventional MADM methods for UAV remote-sensing missions. Using the five-dimensional state vector and sliding window (Section 1), LAAVHA performs stacked-LSTM prediction, attention-based dynamic weighting, and improved TOPSIS decision-making with predicted states. ADH and RS-TOPSIS are then incorporated to form ALERA.

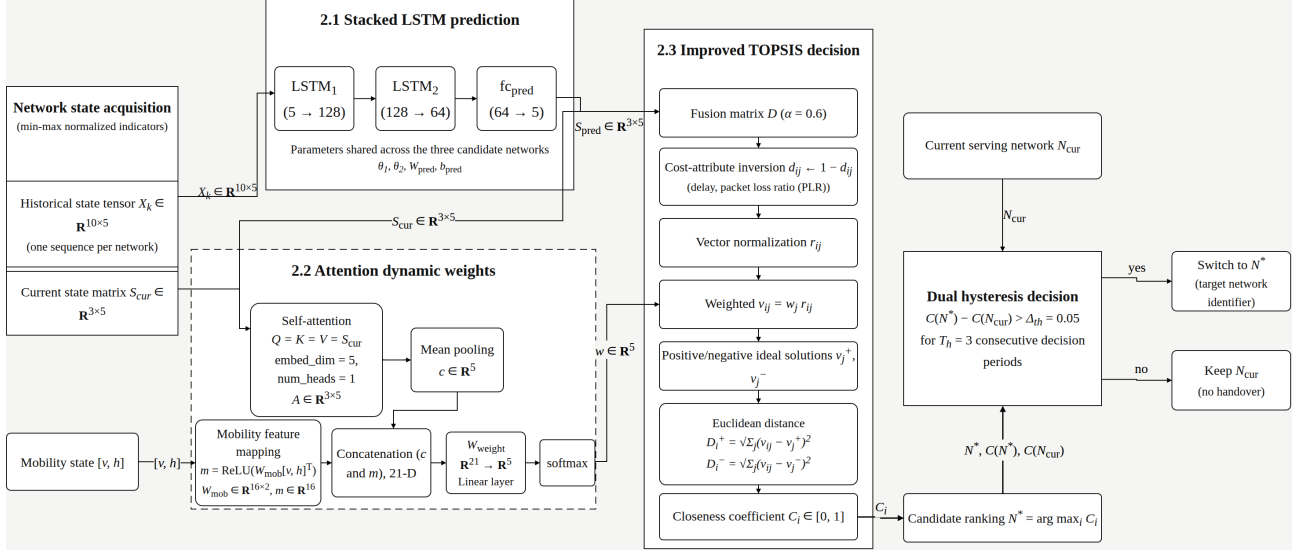

(a) LAAVHA algorithm framework

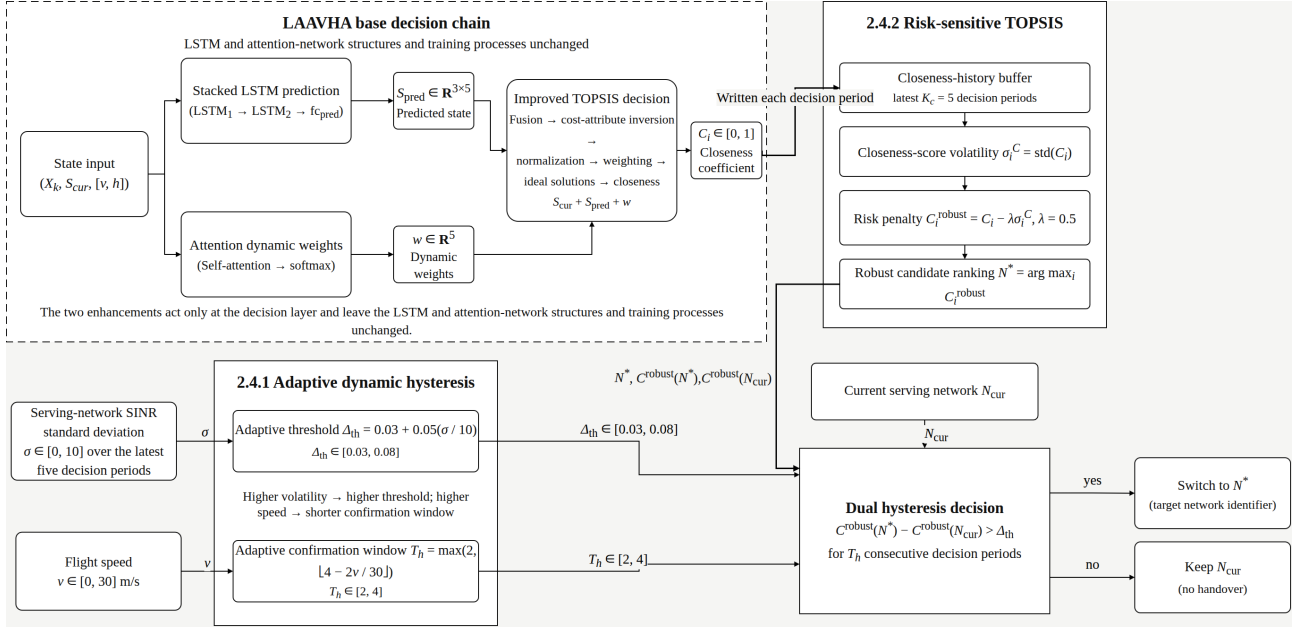

(b) ALERA algorithm framework

Figure 2. LAAVHA and ALERA algorithm frameworks.

LAAVHA comprises network-state prediction, dynamic-weight generation, candidate ranking, and dual-hysteresis decision-making, with ADH and RS-TOPSIS extending the decision chain (Figure 2). These modules form a sequential flow around a common network state. The historical sequence  $X_k$ , collected and normalized in Section 1, enters the stacked LSTM to produce the next-period predicted state  $S_{pred}$ . Additionally, the current-state matrix  $S_{cur}$  enters the attention module with mobility features, including speed and altitude, to generate dynamic weight  $w$ . Then  $S_{cur}$ ,  $S_{pred}$ , and  $w$  are combined in improved TOPSIS to obtain candidate closeness score  $C_i$ . Finally,  $C_i$  and the current serving network  $N_{cur}$  enter the hysteresis decision module with ALERA enhancements to determine the final handover. Therefore, Section 2.1 predicts future states, Section 2.2 determines attribute importance, Section 2.3 ranks candidates using current and future states, and Section 2.4 determines whether handover is appropriate under channel fluctuations.

In the prediction branch,  $\theta_1$  and  $\theta_2$  denote the parameters of the two LSTM layers, while  $W_{pred}$  and  $b_{pred}$  represent the prediction-head weight and bias. In the attention branch,  $Q$ ,  $K$ , and  $V$  indicate the query, key, and value;  $A$

signifies the attention output;  $c$  corresponds to the mean-pooled context vector;  $v$  and  $h$  are flight speed and altitude;  $W_{\text{mob}}$  maps them to the mobility feature  $m$ ; and  $W_{\text{weight}}$  projects the concatenated  $c$  and  $m$  to dynamic weight  $w$ . In the TOPSIS branch,  $D$  represents the fused decision matrix;  $\alpha$  denotes the fusion coefficient;  $d_{ij}$ ,  $r_{ij}$ , and  $v_{ij}$  denote the candidate's fused, normalized, and weighted elements, respectively;  $v_j^+$  and  $v_j^-$  indicate the positive and negative ideal solutions;  $D_i^+$  and  $D_i^-$  signify the Euclidean distances of candidate  $i$  from these solutions;  $C_i$  is its closeness score;  $N^*$  corresponds to the selected target network; and  $\Delta_{\text{th}}$  and  $T_h$  are the handover threshold and consecutive-confirmation window. In the enhancement branch,  $K_c$  denotes the closeness-history length,  $\sigma_i^C$  represents the standard deviation of candidate  $i$ 's scores,  $\lambda$  indicates the risk coefficient,  $C_i^{\text{robust}}$  signifies the risk-adjusted score, and  $\sigma$  is the serving network's SINR standard deviation over the latest five periods.

## 2.1 Network-State Prediction using a Stacked LSTM

The time-window length is set to  $T_s = 10$ , covering 10 consecutive decision periods over 1.0 s with a decision interval of  $\tau = 0.1$  s. Candidate networks  $k \in \{1, 2, 3\}$  represent 5G, LTE, and Wi-Fi, respectively. The historical input tensor  $X_k \in \mathbf{R}^{10 \times 5}$  is constructed by row-wise stacking the normalized five-dimensional state vectors across the 10 periods. The prediction target is the next-period state vector  $\hat{s}_k(t + \tau) \in \mathbf{R}^5$ :

$$h_{1,k} = \text{LSTM}_1(X_k; \theta_1), \quad h_{1,k} \in \mathbf{R}^{10 \times 128}, \quad (2)$$

$$h_{2,k} = \text{LSTM}_2(h_{1,k}; \theta_2), \quad h_{2,k} \in \mathbf{R}^{10 \times 64}, \quad (3)$$

$$\hat{s}_k(t + \tau) = W_{\text{pred}} h_{2,k}[-1] + b_{\text{pred}}, \quad \hat{s}_k \in \mathbf{R}^5. \quad (4)$$

where  $\theta_1$  and  $\theta_2$  denote the trainable parameters of the two LSTM layers, including the weights and biases of the input, forget, and output gates and cell states, while  $W_{\text{pred}} \in \mathbf{R}^{5 \times 64}$  and  $b_{\text{pred}} \in \mathbf{R}^5$  represent the fully connected prediction-head weight and bias, respectively, and  $h_{2,k}[-1]$  indicates the final output of  $\text{LSTM}_2$ . Equations (2)–(4) define the prediction pipeline: 10 steps  $\times$  5 indicators  $\rightarrow \text{LSTM}_1(5 \rightarrow 128) \rightarrow \text{LSTM}_2(128 \rightarrow 64) \rightarrow \text{fc\_pred}(64 \rightarrow 5)$ . The three candidate networks share  $\theta_1$ ,  $\theta_2$ ,  $W_{\text{pred}}$ , and  $b_{\text{pred}}$ , while using their respective historical sequences  $X_k$ . The resulting predictions are stacked into  $S_{\text{pred}} \in \mathbf{R}^{3 \times 5}$ , representing the next-period values of the five indicators for each network.

$S_{\text{pred}}$  is not a direct handover score but a comparable prediction of each candidate's next-period state derived from its historical sequence  $X_k$ . In Section 2.3, Equation (11), it is fused with the current state  $S_{\text{cur}}$ , enabling TOPSIS to incorporate both current measurements and short-term predictions. Without  $S_{\text{pred}}$ , handover decisions would rely solely on passive ranking of  $S_{\text{cur}}$ , as evaluated by the LAAVHA-L ablation variant.

## 2.2 Dynamic Weight Generation for Flight Phases

Network-attribute importance varies with the VHO decisions. During cruise, link stability and flight-control delay are more critical to safety, whereas during image return at imaging sites, throughput and packet loss become more important for timely and reliable transmission of high-resolution images [25]. Fixed weights cannot capture these changing priorities.

To capture phase-dependent requirements, LAAVHA employs self-attention [26–27]. The five-dimensional state vectors of the three candidates are row-wise stacked into  $S_{\text{cur}} \in \mathbf{R}^{3 \times 5}$ , with  $Q = K = V = S_{\text{cur}}$ ,  $\text{embed\_dim} = 5$ , and  $\text{num\_heads} = 1$ . The  $\text{embed\_dim}$  denotes the feature dimension of each attention input and is set to 5, corresponding to the normalized SINR, RSRP, delay, throughput, and packet loss ratio indicators, and  $\text{num\_heads}$  represents the number of parallel attention heads and is set to 1. With five attributes, multiple heads would provide too few features per head and reduce weight interpretability. A single head therefore learns attribute correlations directly. Scaled dot-product attention computes attribute interactions, where  $a_{ij}$  in the attention matrix  $A$  represents the importance of attribute  $j$  to attribute  $i$ . Cross-network mean pooling extracts the attribute-level context  $c \in \mathbf{R}^5$ .

Flight speed  $v$  and altitude  $h$  are mapped by  $W_{\text{mob}} \in \mathbf{R}^{16 \times 2}$  to mobility feature  $m \in \mathbf{R}^{16}$ . The concatenated results are projected by a fully connected layer and normalized by softmax to obtain the five-dimensional dynamic weight  $w$ :

$$Q = K = V = S_{\text{cur}} \in \mathbf{R}^{3 \times 5}, \quad (5)$$

$$A = \text{Attention}(Q, K, V) = \text{softmax}\left(\frac{QK^\top}{\sqrt{5}}\right) V, \quad A \in \mathbf{R}^{3 \times 5}, \quad (6)$$

$$c = \text{mean}(A, \text{dim} = 0) \in \mathbf{R}^5, \quad (7)$$

$$m = \text{ReLU}(W_{\text{mob}}[v, h]^\top), \quad W_{\text{mob}} : \mathbf{R}^2 \rightarrow \mathbf{R}^{16}, \quad m \in \mathbf{R}^{16}, \quad (8)$$

$$w = \text{softmax}(W_{\text{weight}}[c \parallel m]), \quad W_{\text{weight}} : \mathbf{R}^{21} \rightarrow \mathbf{R}^5, \quad w \in \mathbf{R}^5, \quad \sum_j w_j = 1. \quad (9)$$

Equations (5)–(9) define the dynamic-weight procedure:  $S_{\text{cur}} \in \mathbf{R}^{3 \times 5}$  enters self-attention, producing the  $3 \times 5$  matrix  $A$ ; cross-network mean pooling yields the five-dimensional attribute context  $c$ ;  $W_{\text{mob}} : 2 \rightarrow 16$  maps speed and altitude to the 16-dimensional mobility feature  $m$ ; and their 21-dimensional concatenation is projected by  $W_{\text{weight}}$  and softmax-normalized to obtain the five-dimensional dynamic weight  $w$ .

The output  $w$  is not an independent assessment of a network quality measure but an input to the TOPSIS weighting step in Section 2.3. In Equation (14),  $v_{ij} = w_j r_{ij}$  applies  $w_j$  to the  $j$ th attribute of the fused matrix  $D$ , allowing the importance of SINR, RSRP, delay, throughput, and packet loss ratio to adapt to the current network and flight state. Therefore, the LSTM branch predicts future state changes, while the attention branch determines current attribute importance; both contribute to the final TOPSIS closeness score  $C_i$ .

### 2.3 Improved TOPSIS Decision Making with Fused Predicted States

This subsection integrates the preceding learning modules.  $S_{\text{pred}}$  from Section 2.1 provides the short-term future state,  $w$  from Section 2.2 provides phase-dependent attribute weights, and  $S_{\text{cur}}$  from Section 1 provides the current state. Since remote-sensing cruise performance depends jointly on signal strength, transmission capability, and reliability, no single indicator defines the optimal network. TOPSIS ranks candidates by their proximity to the virtual ideal and negative-ideal networks [8–9]. To incorporate future conditions, LAHVHA fuses the current and predicted states to form the decision matrix:

$$s_{\text{norm}} = \frac{s - s_{\min}}{s_{\max} - s_{\min}}, \quad \text{for each indicator } j, \quad (10)$$

$$d_{ij} = \alpha s_{\text{cur}}(i, j) + (1 - \alpha) s_{\text{pred}}(i, j), \quad \alpha = 0.6, \quad (11)$$

$$d_{ij} \leftarrow 1 - d_{ij}, \quad j \in \{\text{delay, PLR}\}. \quad (12)$$

where  $i = 1, 2, 3$  denotes the candidate network index for 5G, LTE, and Wi-Fi, respectively,  $j$  represents the attribute index for SINR, RSRP, delay, throughput, and packet loss ratio,  $s$  indicates the original attribute value,  $s_{\min}$  and  $s_{\max}$  are its minimum and maximum values across candidates in the current period,  $s_{\text{norm}}$  indicates the normalized value in  $[0, 1]$ ,  $s_{\text{cur}}(i, j)$  and  $s_{\text{pred}}(i, j)$  correspond to the normalized current and LSTM-predicted next-period values, respectively and  $d_{ij}$  denotes the resulting fused element of decision matrix  $D$ . The fusion coefficient  $\alpha = 0.6$ , justified experimentally in Section 3.1, prioritizes current measurements while retaining predictive guidance. Delay and packet loss ratio are cost criteria; therefore, Equation (12) inverts their normalized values so that all TOPSIS inputs follow a larger-is-better orientation. The resulting fused decision matrix  $D \in \mathbf{R}^{3 \times 5}$  then enters standard

TOPSIS:

$$r_{ij} = \frac{d_{ij}}{\sqrt{\sum_{k=1}^3 d_{kj}^2}}, \quad (13)$$

$$v_{ij} = w_j r_{ij}, \quad (14)$$

$$v_j^+ = \max_i v_{ij}, \quad v_j^- = \min_i v_{ij}, \quad (15)$$

$$D_i^+ = \sqrt{\sum_{j=1}^5 (v_{ij} - v_j^+)^2}, \quad D_i^- = \sqrt{\sum_{j=1}^5 (v_{ij} - v_j^-)^2}, \quad (16)$$

$$C_i = \frac{D_i^-}{D_i^+ + D_i^-}, \quad C_i \in [0, 1]. \quad (17)$$

where  $r_{ij}$  denotes the vector-normalized element of fused matrix  $D$ , and  $\sqrt{\sum_{k=1}^3 d_{kj}^2}$  represents the Euclidean norm of attribute  $j$  across the three candidates, with  $k$  as the summation index,  $w_j$  indicates the dynamic weight of attribute  $j$  from the attention module,  $v_{ij}$  signifies the weighted normalized element,  $v_j^+$  and  $v_j^-$  correspond to the positive and negative ideal solutions, defined as the largest and smallest weighted normalized values for attribute  $j$ , respectively,  $D_i^+$  and  $D_i^-$  are the distances of candidate  $i$  from these solutions, and  $C_i \in [0, 1]$  is its relative closeness. Therefore, Equations (13)–(17) convert the  $3 \times 5$  fused matrix into three closeness scores through normalization, dynamic weighting, ideal-solution determination, and Euclidean-distance calculation. A value closer to 1 indicates stronger overall support for image transmission, flight-control responsiveness, and link reliability.

$$N^* = \arg \max_i C_i, \quad (18)$$

$$\text{Decision} = \begin{cases} \text{switch to } N^*, & C(N^*) - C(N_{\text{cur}}) > \Delta_{\text{th}} \text{ and lasts } T_h \text{ consecutive cycles,} \\ \text{keep } N_{\text{cur}}, & \text{otherwise,} \end{cases} \quad (19)$$

where  $N^*$  denotes the candidate with the highest current closeness,  $N_{\text{cur}}$  represents the serving network,  $C(N^*)$  and  $C(N_{\text{cur}})$  indicate their respective TOPSIS closeness scores,  $\Delta_{\text{th}}$  specifies the required score advantage, and  $T_h$  specifies its required persistence. This study sets  $\Delta_{\text{th}} = 0.05$  and  $T_h = 3$  based on experiments in Section 3.1. To suppress ping-pong handovers caused by transient fluctuations, handover occurs only when  $N^*$  exceeds  $N_{\text{cur}}$  by more than  $\Delta_{\text{th}} = 0.05$  for  $T_h = 3$  consecutive periods. Algorithm 1 integrates prediction, dynamic-weight generation, TOPSIS ranking, and hysteresis adjudication into the LAHVHA procedure.



---

**Algorithm 1.** LAAVHA vertical-handover decision procedure

---

**Require:** Historical states  $\{X_k\}_{k=1}^3$ , current state  $S_{\text{cur}}$ , mobility state  $[v, h]$ , serving network  $N_{\text{cur}}$ , previous confirmed candidate  $N_{\text{cand}}$ , and its consecutive count  $q$

**Ensure:** Handover decision Decision and updated  $N_{\text{cur}}$ ,  $N_{\text{cand}}$ , and  $q$

- 1: **Stage 0: Initialization**
- 2: Read the current decision-period state and previous hysteresis state  $N_{\text{cand}}, q$
- 3: **Stage 1: State prediction and dynamic-weight generation**
- 4: **for**  $k \leftarrow 1$  **to** 3 **do**
- 5:    $h_{1,k} \leftarrow \text{LSTM}_1(X_k; \theta_1), h_{2,k} \leftarrow \text{LSTM}_2(h_{1,k}; \theta_2)$
- 6:    $s_{\text{pred},k} \leftarrow W_{\text{pred}}h_{2,k}[-1] + b_{\text{pred}}$
- 7: **end for**
- 8: Stack  $\{s_{\text{pred},k}\}_{k=1}^3$  as  $S_{\text{pred}}$
- 9:  $A \leftarrow \text{Attention}(S_{\text{cur}}, S_{\text{cur}}, S_{\text{cur}}), c \leftarrow \text{mean}(A, \text{dim} = 0)$
- 10:  $m \leftarrow \text{ReLU}(W_{\text{mob}}[v, h]^T), w \leftarrow \text{softmax}(W_{\text{weight}}[c \parallel m])$
- 11: **Stage 2: Fused-TOPSIS candidate ranking**
- 12: **for**  $i \leftarrow 1$  **to** 3 **do**
- 13:   **for**  $j \leftarrow 1$  **to** 5 **do**
- 14:      $d_{ij} \leftarrow 0.6s_{\text{cur}}(i, j) + 0.4s_{\text{pred}}(i, j)$
- 15:     **if**  $j \in \{\text{delay}, \text{PLR}\}$  **then**  $d_{ij} \leftarrow 1 - d_{ij}$
- 16:     **end if**
- 17:   **end for**
- 18: **end for**
- 19: Compute  $r_{ij}, v_{ij}, v_j^+, v_j^-, D_i^+, D_i^-,$  and  $C_i$  using Equations (13)–(17)
- 20:  $N^* \leftarrow \arg \max_i C_i$
- 21: **Stage 3: Dual-hysteresis handover decision**
- 22: **if**  $N^* \neq N_{\text{cand}}$  **then**
- 23:    $N_{\text{cand}} \leftarrow N^*, q \leftarrow 0$
- 24: **end if**
- 25: **if**  $C(N^*) - C(N_{\text{cur}}) > \Delta_{\text{th}}$  **then**
- 26:    $q \leftarrow q + 1$
- 27: **else**
- 28:    $q \leftarrow 0$
- 29: **end if**
- 30: **if**  $q \geq T_h$  **then**
- 31:   Decision  $\leftarrow$  switch to  $N^*, N_{\text{cur}} \leftarrow N^*$
- 32: **else**
- 33:   Decision  $\leftarrow$  keep  $N_{\text{cur}}$
- 34: **end if**
- 35: **return** Decision,  $N_{\text{cur}}, N_{\text{cand}}, q$

---

Algorithm 1 shows that the stacked LSTM generates only the predicted state  $S_{\text{pred}}$ , while the attention module generates only the dynamic weight  $w$ . Both are combined with  $S_{\text{cur}}$  in TOPSIS to compute  $C_i$ , followed by dual hysteresis for the handover decision. The sequence follows Equations (2)–(19).

## 2.4 ALERA Enhanced Risk-Aware Vertical Handoff Algorithm

Section 2.3 establishes the base decision chain from state prediction and dynamic weighting to candidate ranking and handover, but its dual hysteresis uses fixed parameters. Although effective in stable channels, fixed thresholds and windows cannot balance fluctuation resistance and handover timeliness during coverage-boundary crossings, obstruction, or major speed changes. Standard TOPSIS also ranks candidates by current closeness without accounting for score-series risk. Without retraining the LSTM-attention model, this section introduces ADH and RS-TOPSIS. ADH uses serving-network SINR history and flight speed to dynamically update  $\Delta_{\text{th}}$  and  $T_h$  in Equation (19), while RS-TOPSIS uses the  $C_i$  sequence from Section 2.3 to derive risk-penalized  $C_i^{\text{robust}}$  for final candidate ranking, forming ALERA.

### 2.4.1 Adaptive Hysteresis Parameters

Adaptive hysteresis margins and trigger windows improve handover decisions in heterogeneous and ultra-dense networks [28–31]. Accordingly, fixed  $\Delta_{th}$  and  $T_h$  are replaced with context-aware values. The variable  $\sigma$  denotes the standard deviation of serving network SINR over the latest five decision periods, while  $v$  denotes real-time flight speed, and  $\sigma$  is derived from the SINR history in Equation (1), and  $v$  is the mobility input used for dynamic weighting in Section 2.2. ADH thus reuses available states and adapts only the threshold and confirmation window of the final hysteresis decision. The adaptive threshold and window are:

$$\Delta_{th} = 0.03 + 0.05 \left( \frac{\sigma}{10} \right), \quad \sigma \in [0, 10], \quad (20)$$

$$T_h = \max \left( 2, \left\lfloor 4 - \frac{2v}{30} \right\rfloor \right), \quad v \in [0, 30] \text{ m/s}. \quad (21)$$

Equation (20) sets a base threshold of 0.03 under stable channels ( $\sigma \approx 0$ ), below the fixed value of 0.05 and allowing faster response to sustained degradation. Under severe variation ( $\sigma \approx 10$ ), it increases linearly to 0.08, strengthening the handover barrier. Equation (21) sets a window of 4 at low speed ( $v \approx 5$  m/s) for sufficient confirmation and decreases it to a minimum of 2 as speed increases, enabling timely handover near coverage boundaries. Therefore,  $\Delta_{th} \in [0.03, 0.08]$  and  $T_h \in [2, 4]$  retain anti-chattering capability under extreme conditions. At 30 m/s, the UAV travels 3 m in a 0.1 s period;  $T_h = 4$  therefore permits 12 m of movement, potentially shifting the UAV from Wi-Fi-center to edge coverage before confirmation.  $T_h = 2$  limits this to 6 m and better supports boundary handover. At 5 m/s,  $T_h = 4$  corresponds to only 2 m, allowing longer confirmation to filter transient variations with limited obsolescence risk. The settings of  $\Delta_{th}$ ,  $T_h$ , and the  $\sigma$  history length are validated experimentally in Section 3.1.

### 2.4.2 Risk-Sensitive TOPSIS

Original TOPSIS ranks candidates by current closeness  $C_i$ , obtained from Equation (17) by fusing  $S_{cur}$ ,  $S_{pred}$ , and  $w$ . RS-TOPSIS retains this prediction and weighting process while adding a risk constraint to the  $C_i$  series. Based on the lower-confidence-bound (LCB) principle, a historical-variation penalty is subtracted from each candidate score:

$$C_i^{robust} = C_i - \lambda \sigma_i^C, \quad \lambda = 0.5, \quad (22)$$

where  $\sigma_i^C$  denotes the standard deviation of the latest five scores for network  $i$ , and  $\lambda = 0.5$  is the risk-aversion coefficient, justified experimentally in Section 3.1. When current scores are similar, the mechanism favors the more stable candidate over one with a slightly higher mean but greater variation. For example, if LTE closeness increases steadily with low variance while Wi-Fi closeness fluctuates sharply,  $C_i^{robust}$  favors LTE even with slightly higher current Wi-Fi closeness, improving remote-sensing data continuity.

The two enhancements require no LSTM-attention retraining or changes to its inference structure. They apply lightweight statistical and rule-based updates to existing state and score sequences, adding minimal overhead to stacked-LSTM prediction and attention-weight generation. ADH adjusts the handover barrier based on channel variation and speed, while RS-TOPSIS reduces the ranking advantage of volatile candidates. Their impact is limited under stable channels but increases with variation, jointly strengthening environmental awareness and ping-pong suppression at low additional cost.

Algorithm 2 enhances the base closeness score at each decision period. Its  $C_i$  input comes from Algorithm 1's TOPSIS steps. RS-TOPSIS first adjusts the ranking score, ADH then updates the dual-hysteresis parameters, and the final decision remains dependent on persistent robust-score advantage.

---

**Algorithm 2.** ALERA risk-aware vertical-handoff enhancement procedure

---

**Require:** Base closeness  $\{C_i\}_{i=1}^3$  and its latest  $K_c = 5$  history, latest five serving-network SINR values, flight speed  $v$ , serving network  $N_{\text{cur}}$ , previous confirmed candidate  $N_{\text{cand}}$ , and its consecutive count  $q$

**Ensure:** Enhanced handover decision Decision and updated  $N_{\text{cur}}$ ,  $N_{\text{cand}}$ , and  $q$

- 1: **Stage 0: Initialize states and history cache**
- 2: Read base closeness, SINR history, speed, and previous hysteresis state  $N_{\text{cand}}$ ,  $q$
- 3: **Stage 1: RS-TOPSIS risk-sensitive ranking**
- 4: **for**  $i \leftarrow 1$  **to** 3 **do**
- 5:   Write  $C_i$  to the closeness-history cache and retain the latest  $K_c$  periods
- 6:    $\sigma_i^C \leftarrow \text{std}(\text{latest } K_c\text{-period history of } C_i)$
- 7:    $C_i^{\text{robust}} \leftarrow C_i - 0.5\sigma_i^C$
- 8: **end for**
- 9:  $N^* \leftarrow \arg \max_i C_i^{\text{robust}}$
- 10: **Stage 2: ADH adaptive-hysteresis parameter update**
- 11:  $\sigma \leftarrow \text{std}(\text{latest five SINR values of } N_{\text{cur}})$
- 12:  $\Delta_{\text{th}} \leftarrow 0.03 + 0.05(\sigma/10)$ ,  $T_h \leftarrow \max(2, \lfloor 4 - 2v/30 \rfloor)$
- 13: **Stage 3: Robust-score dual-hysteresis decision**
- 14: **if**  $N^* \neq N_{\text{cand}}$  **then**
- 15:    $N_{\text{cand}} \leftarrow N^*$ ,  $q \leftarrow 0$
- 16: **end if**
- 17: **if**  $C^{\text{robust}}(N^*) - C^{\text{robust}}(N_{\text{cur}}) > \Delta_{\text{th}}$  **then**
- 18:    $q \leftarrow q + 1$
- 19: **else**
- 20:    $q \leftarrow 0$
- 21: **end if**
- 22: **if**  $q \geq T_h$  **then**
- 23:   Decision  $\leftarrow$  switch to  $N^*$ ,  $N_{\text{cur}} \leftarrow N^*$
- 24: **else**
- 25:   Decision  $\leftarrow$  keep  $N_{\text{cur}}$
- 26: **end if**
- 27: **return** Decision,  $N_{\text{cur}}$ ,  $N_{\text{cand}}$ ,  $q$

---

## 2.5 Complexity Analysis and Algorithm Summary

Table 1 summarizes the inputs, outputs, core procedures, and computational complexity of LAAVHA and ALERA in data-flow order. The stacked-LSTM prediction module (Section 2.1) processes the historical state tensor  $X_k \in \mathbf{R}^{10 \times 5}$  through two LSTM layers to generate  $S_{\text{pred}} \in \mathbf{R}^{3 \times 5}$ , with gate-matrix computation as the bottleneck and complexity  $O(R \cdot K \cdot d \cdot h^2)$ . The dynamic-attention module (Section 2.2) processes  $S_{\text{cur}} \in \mathbf{R}^{3 \times 5}$ , incorporates mobility features, and outputs  $w \in \mathbf{R}^5$ , with self-attention complexity  $O(R^2 \cdot d)$ . Improved TOPSIS (Section 2.3) fuses and normalizes  $S_{\text{cur}}$  and  $S_{\text{pred}}$ , then ranks candidates using weights, producing  $C_i$  with overall complexity  $O(R \cdot d)$ . ADH and RS-TOPSIS use SINR, speed, and  $C_i$  history for lightweight statistical updates. End-to-end inference is dominated by LSTM prediction and attention-weight generation, supporting real-time handover decisions in UAV remote-sensing cruise scenarios.

**Table 1.** Summary of the algorithms.

| Module                    | Input/output                                                                     | Core procedure                                                                                                                      | Complexity                       |
|---------------------------|----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|
| Stacked-LSTM prediction   | In: $3 \times 10 \times 5$ state tensor; out: predicted state                    | LSTM <sub>1</sub> (5 $\rightarrow$ 128) $\rightarrow$ LSTM <sub>2</sub> (128 $\rightarrow$ 64) $\rightarrow$ fc(64 $\rightarrow$ 5) | $O(R \cdot K \cdot d \cdot h^2)$ |
| Attention dynamic weights | In: $3 \times 5$ state matrix + mobility features; out: 5-D dynamic weights      | Self-Attn $\rightarrow$ mean pooling $\rightarrow$ concatenate mobility features $\rightarrow$ softmax                              | $O(R^2 \cdot d)$                 |
| Improved TOPSIS           | In: current + predicted states + dynamic weights; out: candidate closeness $C_i$ | Fused matrix $\rightarrow$ weighted normalization $\rightarrow$ positive/negative ideal solutions $\rightarrow$ closeness           | $O(R \cdot d)$                   |
| ADH                       | In: SINR history + flight speed; out: adaptive $\Delta_{th}, T_h$                | SINR-variation calculation $\rightarrow$ linear threshold adjustment $\rightarrow$ window adaptation                                | $O(1)$                           |
| RS-TOPSIS                 | In: recent closeness history; out: LCB-adjusted ranking                          | Historical standard deviation $\rightarrow$ penalty calculation $\rightarrow$ $C_i^{\text{robust}}$ ranking                         | $O(R \cdot K_c)$                 |

### 3 Simulation Experiments and Results Analysis

#### 3.1 Experimental Platform and Parameter Settings


To evaluate LAAVHA/ALERA in UAV remote-sensing heterogeneous networks, a simulation and inference platform was developed using ns-3.45<sup>[32]</sup> and its AI extension ns3-ai<sup>[33]</sup>. ns-3 implements the 5G/LTE/Wi-Fi topology, UAV mobility, and physical- and transport-layer measurements, while ns3-ai enables bidirectional simulation-inference communication through shared memory. Each decision period transfers a 10-step history of five indicators for three candidate networks (150 dimensions) and the mobility state to shared memory. The inference module loads the trained LAAVHA model, reads the network state, speed, altitude, and current-network identifier, and returns the target-network identifier and candidate scores. Network identifiers are 0=5G, 1=LTE, and 2=Wi-Fi. The model input comprises five indicators for each candidate network ( $3 \text{ networks} \times 10 \text{ time steps} \times 5 \text{ indicators} = 150 \text{ dimensions}$ ), with each network processed independently by the stacked LSTM. Mobility input comprises speed and altitude. The model outputs a five-dimensional predicted state and dynamic weight, followed by candidate scoring through improved TOPSIS. Fifty random seeds (200–249) simulate remote-sensing cruise with varied initial positions and altitudes. Each simulation lasts 10 s with a 0.1 s decision period, yielding 100 decisions. Position and altitude perturbations of 30 m and 10 m, respectively, represent flight deviations.

Before finalizing the parameters in Section 2, three sensitivity experiments were conducted, with results shown in Fig. 3. The fusion-coefficient experiment replayed 50 stress sequences involving sustained link degradation and transient fluctuations. Current observations included channel-measurement variation, while predicted states exhibited short-term lag under abrupt changes. For  $\alpha = 0.2, 0.4, 0.6, 0.8$ , mean false-handover counts were 1.20, 0.90, 0.08, and 1.00, respectively. Lower  $\alpha$  increased sensitivity to prediction lag, whereas higher  $\alpha$  increased sensitivity to measurement variation. Therefore,  $\alpha = 0.6$  provided the best balance, minimizing false handovers and assigning 60% weight to current measurements and 40% to predictions.

Dual-hysteresis and enhancement parameters were evaluated over 50 repetitions of the two competitive intervals used in the subsequent scenario-adaptation experiment: sustained link degradation requiring handover and transient fluctuations that should not trigger handover. Across  $\Delta_{th} \in \{0.03, 0.05, 0.07\}$  and  $T_h \in \{2, 3, 4\}$ , all combinations achieved 100% necessary-handovers. The  $\Delta_{th} = 0.05, T_h = 3$  setting yielded 0.64 mean false handovers and 1.55 s mean detection delay. The more aggressive 0.03, 2 setting responded faster but produced 9.10 mean false handovers, whereas the conservative 0.07, 4 setting eliminated false handovers but increased mean detection delay to 2.00 s.

Therefore, 0.05, 3 was selected to balance stability and response time.

The enhancement parameters  $K_c \in \{3, 5, 7\}$  and  $\lambda \in \{0.2, 0.5, 0.8\}$  were further evaluated, with all combinations identifying 100% of necessary handovers. At  $K_c = 5$ , increasing  $\lambda$  from 0.2 to 0.8 reduced mean false handovers from 1.90 to 0.58 but increased mean detection delay from 1.13 s to 1.22 s. At  $\lambda = 0.5$ ,  $K_c = 5$  produced 1.08 mean false handovers, compared with 1.48 for  $K_c = 3$  and 1.14 for  $K_c = 7$ , with a mean detection delay of 1.17 s. Considering risk suppression, history stability, and handover timeliness,  $K_c = 5, \lambda = 0.5$  were selected.

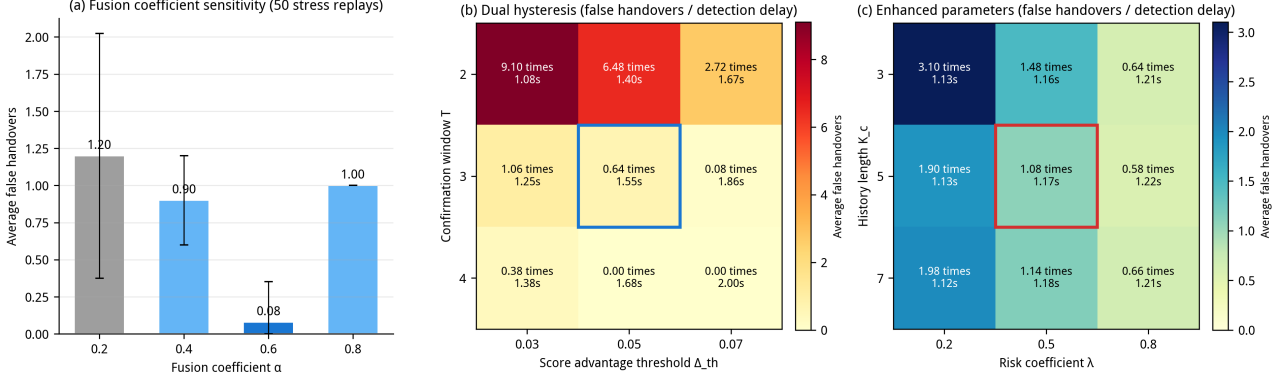

**Figure 3.** Sensitivity analysis of the fusion coefficient, dual-hysteresis parameters, and enhancement parameters. (For (b) and (c), upper entries denote mean false-handover counts and lower entries denote mean detection delays.)

Based on these parameter-selection experiments, Table 2 summarizes the platform, network scenario, model architecture, and training/inference parameters. All comparison algorithms use the same simulation configuration, indicator sources, and analysis setting to avoid confounding algorithmic and environmental effects.

**Table 2.** Experimental parameter settings.

| Parameter                   | Value                                                                                     |
|-----------------------------|-------------------------------------------------------------------------------------------|
| Simulation platform         | ns-3.45, ns3-ai, Python/PyTorch                                                           |
| Candidate networks          | 5G, LTE, Wi-Fi                                                                            |
| Algorithm scope             | LAHVHA, 8 comparison algorithms, and 2 ablation variants                                  |
| Runs                        | 50 random scenarios for each algorithm                                                    |
| Simulation duration         | 10 s                                                                                      |
| Decision period             | 0.1 s                                                                                     |
| Decisions per run           | 100                                                                                       |
| Random seeds                | 200–249                                                                                   |
| FlowMonitor mode            | feed                                                                                      |
| Indicator dimensions        | SINR, RSRP, delay, throughput, packet loss ratio                                          |
| Position perturbation       | 30 m                                                                                      |
| Altitude perturbation       | 10 m                                                                                      |
| Time window $T_s$           | 10                                                                                        |
| LSTM hidden units           | 128 in the first layer, 64 in the second layer                                            |
| Attention heads (num_heads) | 1 (embed_dim=5; single-head attention)                                                    |
| Fusion coefficient $\alpha$ | 0.6                                                                                       |
| Dual-hysteresis parameters  | $\Delta_{th} = 0.05$ , confirmation window $T_h = 3$                                      |
| Enhancement parameters      | RS-TOPSIS closeness-history length $K_c = 5$ , RS-TOPSIS risk coefficient $\lambda = 0.5$ |
| Dataset split               | training/validation = 80%/20%                                                             |
| Optimizer                   | Adam                                                                                      |
| Early stopping              | validation loss does not decrease for 10 consecutive epochs                               |

In addition to LAAVHA, the experiments evaluate eight comparison algorithms, namely TOPSIS-Q, Fuzzy-VHO, SAW, VIKOR, GRA, COPRAS, SPOTIS, and strongest-signal selection, plus the ablation variants LAAVHA-L and LAAVHA-A. These methods represent seven decision paradigms: fuzzy logic (Fuzzy-VHO), SAW, compromise ranking (VIKOR), distance-based ranking (TOPSIS-Q), relational analysis (GRA), proportional assessment (COPRAS), and reference-point ranking (SPOTIS). TOPSIS-Q follows TOPSIS network selection with entropy-weighted improved TOPSIS [8–10]; Fuzzy-VHO follows fuzzy handover for 5G UAV networks [4]; VIKOR uses compromise ranking [11]; and GRA, COPRAS, SPOTIS, and SAW represent mainstream multi-attribute mobility decision methods [12]. Strongest-signal selection chooses the candidate with the highest SINR. LAAVHA-L removes LSTM prediction, replacing predicted states with current states while retaining attention weights and dual hysteresis. LAAVHA-A removes attention-based dynamic weighting, retaining LSTM prediction and dual hysteresis while using entropy weighting for TOPSIS.

The 5G candidate uses a proxy link, with SINR and RSRP calculated by a position-based propagation model following wireless-propagation and link-budget principles [34]. Transport indicators are obtained from FlowMonitor statistics for point-to-point proxy flows. A handover event denotes a change in the network identifier selected by LAAVHA, rather than an actual Wi-Fi disassociation, LTE detachment, or 5G new-radio protocol-stack handover. Table 3 summarizes the indicator sources for each candidate network.

**Table 3.** Candidate-network indicator sources.

| Network | SINR/RSRP                                     | Delay                                 | Throughput                                | Packet loss ratio                     |
|---------|-----------------------------------------------|---------------------------------------|-------------------------------------------|---------------------------------------|
| Wi-Fi   | Propagation proxy from MobilityModel position | FlowMonitor                           | PacketSink bytes received within interval | FlowMonitor                           |
| LTE     | Propagation proxy from MobilityModel position | FlowMonitor                           | FlowMonitor                               | FlowMonitor                           |
| 5G      | Propagation proxy to assumed gNB              | Point-to-point proxy-flow FlowMonitor | Point-to-point proxy-flow FlowMonitor     | Point-to-point proxy-flow FlowMonitor |


Table 3 summarizes the sources of the five network-state indicators in Section 3. SINR and RSRP represent physical-layer link quality and are derived from UAV-access-point/base-station positions using the propagation proxy model. Delay, throughput, and packet loss ratio mainly represent transport-layer service quality. Wi-Fi throughput is calculated from PacketSink bytes received between adjacent periods, whereas LTE and 5G transport indicators are obtained from FlowMonitor. The table defines indicator sources for the decision-level simulation platform rather than a complete real-network protocol-stack measurement procedure. All candidates provide identically dimensioned indicators within each decision period, which LAAVHA and comparison methods uniformly normalize before multi-attribute decision making, ensuring identical candidate states and avoiding collection-related bias.

### 3.2 Horizontal Comparison of Algorithms

The results evaluate the two challenges at two levels. First, an 11-algorithm comparison, representative decision-process comparison, and ablation study assess whether LSTM prediction, attention-based dynamic weighting, and dual hysteresis improve candidate selection and handover stability. Second, scenario-adaptation experiments under sustained link degradation and abrupt channel changes, such as high-speed coverage-boundary crossings, assess whether ALERA’s ADH and RS-TOPSIS preserve necessary handovers while suppressing false and ping-pong handovers. All experiments use the defined performance indicators without introducing additional unmeasured metrics.

To evaluate LAAVHA across decision paradigms, eight representative algorithms were tested under identical conditions. Fuzzy-VHO uses a Mamdani fuzzy-inference system to fuzzify SINR and RSRP and make rule-based decisions. SAW applies fixed weights and sums normalized attributes, representing the basic MADM approach.

TOPSIS-Q uses entropy weighting and standard TOPSIS ranking without temporal prediction. GRA ranks candidates by grey relational grades relative to an ideal reference sequence and handles uncertain information. VIKOR balances group utility and individual regret. COPRAS separately evaluates benefit and cost criteria to derive overall utility. SPOTIS ranks candidates by distance to a reference point. Strongest-signal selection chooses the candidate with the highest SINR as a single-factor baseline. Figure 4 compares all 11 algorithms.

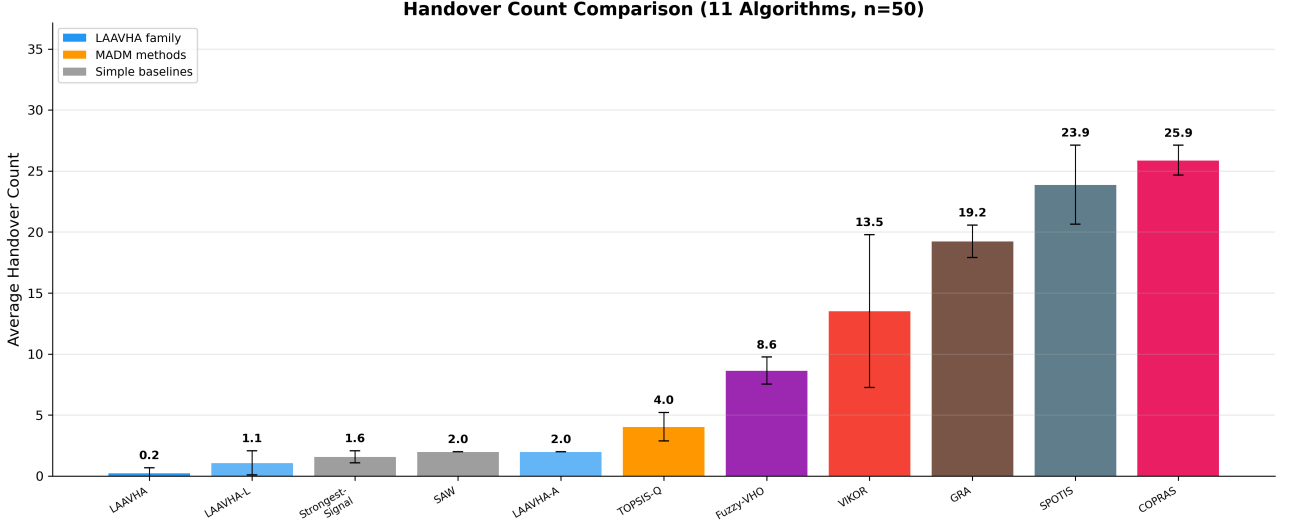

**Figure 4.** Mean handover-count comparison of 11 algorithms (mean  $\pm$  std,  $n=50$ ).


LAAVHA achieves the lowest mean handover count among 11 algorithms, at 0.24 (std=0.43) (Figure 4). Among the eight baselines, strongest-signal selection performs best at 1.58, while SAW, TOPSIS-Q, Fuzzy-VHO, VIKOR, GRA, SPOTIS, and COPRAS yield 2.00, 4.04, 8.64, 13.52, 19.24, 23.88, and 25.88, respectively. These MADM methods use fixed weights and current indicators without temporal prediction or dynamic weighting, allowing alternating candidate-score advantages near coverage boundaries to cause repeated handovers. Strongest-signal selection considers only SINR, excluding delay, throughput, packet loss ratio, and other indicators. Overall, LAAVHA reduces handovers by 84.8%–99.1% versus the eight baselines, with 38 of 50 runs producing zero handovers, demonstrating superior handover stability.

### 3.3 Comparison of Representative Decision Processes

Figure 5 compares LAAVHA, TOPSIS-Q, and Fuzzy-VHO for the same random seed (seed=200) in a two-row, three-column layout. The selection emphasizes explanatory value rather than aggregate handover count. TOPSIS-Q shares LAAVHA’s TOPSIS framework but lacks LSTM prediction, attention-based dynamic weighting, and dual hysteresis, providing a controlled comparison of their effects on closeness stability and handover triggering. Fuzzy-VHO represents a rule-based paradigm driven by fuzzy membership functions and rules, making it more sensitive to local SINR and RSRP fluctuations. Together, they assess dynamic multi-attribute fusion against rule-based handover. Although strongest-signal selection and SAW achieve lower mean counts, strongest-signal uses only SINR and SAW uses fixed weighted sums; neither provides a temporal decision process comparable to LAAVHA and is therefore more suitable for aggregate-statistic comparison.

The upper panels show the integrated TOPSIS closeness scores for 5G, LTE, and Wi-Fi, where values closer to 1 indicate stronger remote-sensing support; the lower panels show their SINR (dB) under the same simulation, with red dashed lines marking handover times. LAAVHA maintains a stable 5G closeness of 0.99–1.00, while LTE and Wi-Fi remain substantially lower, resulting in no handover under dual hysteresis ( $\Delta_{th} = 0.05, T_h = 3$ ). Although 5G does not always have the largest SINR, attention-based dynamic weights incorporate delay, throughput, packet

loss ratio, and other attributes, maintaining its selection. In contrast, TOPSIS-Q triggers several handovers when 5G and Wi-Fi closeness scores converge, while Fuzzy-VHO responds to SINR fluctuations and also triggers multiple handovers. These results demonstrate the stabilizing effects of temporal prediction and dynamic weighting.

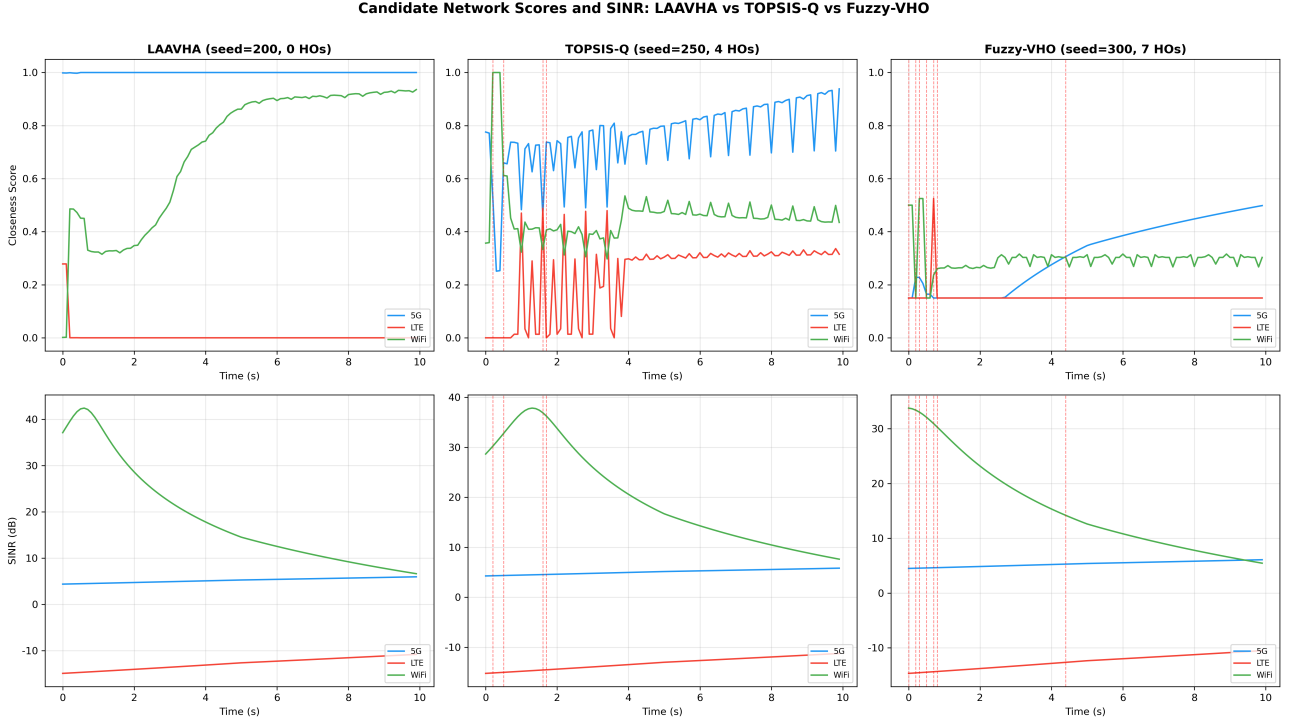


**Figure 5.** Candidate-network scores and SINR time series for LAAVHA, TOPSIS-Q, Fuzzy-VHO (seed=200; vertical lines indicate handovers).

### 3.4 Ablation-Study Validation

Ablation experiments quantify the contributions of LSTM prediction and attention-based dynamic weighting to LAAVHA. LAAVHA-L removes LSTM prediction by setting the predicted state equal to the current state while retaining attention weighting, improved TOPSIS, and dual hysteresis, testing temporal prediction. LAAVHA-A removes attention-based dynamic weighting, retains LSTM prediction, improved TOPSIS, and dual hysteresis, and replaces attention weights with entropy weights, testing dynamic-weight learning. Both variants and full LAAVHA use the same 50 random seeds (200–249) and simulation parameters. Figure 6 presents handover counts with scatter-overlaid bars, where each point represents one run, bar height is the mean, and error bars  $\pm 1$  are the standard deviation. LAAVHA achieves 0.24 (std=0.43), with 38 zero-handover and 12 one-handover runs, demonstrating stable cooperation between prediction and dynamic weighting. LAAVHA-L increases to 1.08 (std = 1.01), showing that removing temporal prediction produces more reactive and variable decisions. LAAVHA-A reaches 2.00 (std = 0.00), with two handovers in all 50 runs, indicating that entropy weighting cannot adapt criteria to the flight phase and leads to ping-pong handovers near the Wi-Fi coverage edge.



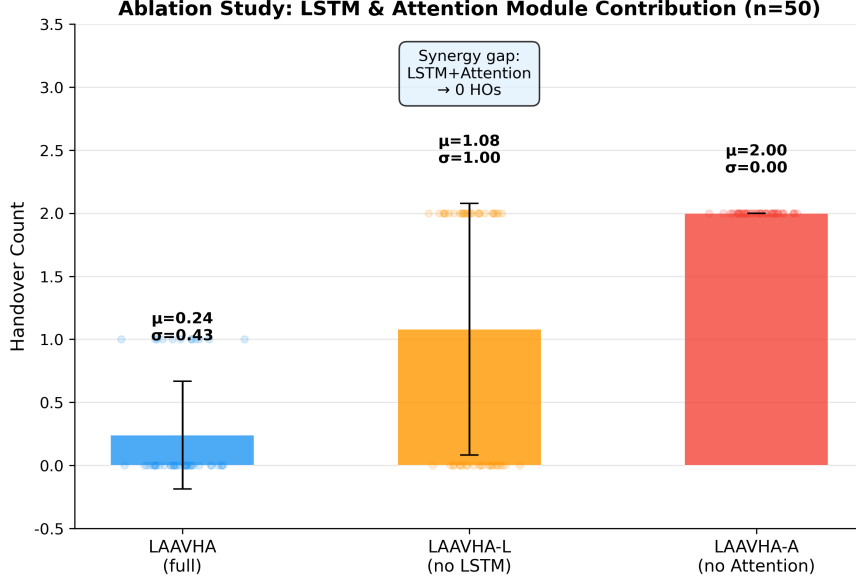

**Figure 6.** Handover-count comparison in the LAAVHA ablation study (mean  $\pm$  std,  $n=50$ ).

The ablation results demonstrate strong synergy between LSTM prediction and attention-based dynamic weighting; neither module alone maintains low handover frequency. Removing attention has the largest effect, increasing the mean from 0.24 to 2.00, an eightfold rise across all 50 runs, showing that flight- and network-state-based weights adapt to phase-specific requirements better than static statistical weights. Removing the LSTM increases the mean to 1.08 with higher variance (std = 1.01), confirming the importance of temporal prediction for stability. Together, these results validate the LAAVHA architecture.

### 3.5 Remote-Sensing Scenario Adaptation and Enhancement Validation

To evaluate ALERA under rapid coverage-boundary crossings and abrupt channel changes, a competitive scenario is constructed with network A, analogous to 5G, and network B, analogous to Wi-Fi, having closeness scores near 0.50; A is initially serving. The scenario represents two remote-sensing image return conditions: timely migration under sustained degradation and handover suppression under transient disturbances from short obstructions or multipath effects. Figure 7 shares the time axis across four panels, with  $t = 5 - 8$  s and  $t = 12 - 15$  s denoting the same intervals in panels a–d. Light-blue Zone 1 represents sustained degradation, where A declines and B improves, requiring a correct A-to-B handover. Light-red Zone 2 represents transient fluctuations, where sinusoidal variation and Gaussian noise are injected into B; short peaks provide no sustained mean advantage and should not trigger handover.

Panel (a) of Figure 7 shows raw closeness curves. The vertical axis represents the candidate’s integrated score before risk penalization, with higher values indicating greater proximity to the ideal candidate. Network B maintains a persistent advantage in Zone 1, whereas its Zone 2 increase is a transient high-frequency oscillation.


Panel (b) shows handovers under the fixed low threshold ( $\Delta_{th} = 0.03$ ); the vertical axis is raw closeness, and red dashed lines mark handover times and directions. Correct A $\rightarrow$ B and B $\rightarrow$ A handovers occur at  $t = 6.6$  s and  $t = 11.9$  s, respectively, corresponding to sustained degradation and subsequent recovery. In Zone 2, transient peaks trigger A $\rightarrow$ B at  $t = 14.8$  s and B $\rightarrow$ A at  $t = 15.1$  s, producing a false handover and subsequent ping-pong handover.

Panel (c) presents ALERA’s risk-adjusted scores, with the vertical axis  $C_i^{robust} = C_i - \lambda\sigma_i^C$ , with green dashed lines indicating handovers. ALERA retains both necessary handovers while suppressing Zone 2 fluctuations and avoiding handover.

Panel (d) shows the adaptive threshold  $\Delta_{th}$ , representing the required closeness advantage. In Zone 2, it in-

creases from 0.03 to approximately 0.09 and gradually decreases after fluctuations subside, demonstrating that ADH raises the handover barrier only under unstable conditions.

The enhancement provides two key benefits. Under sustained degradation, it completes the necessary handover from degraded network A to better network B, avoiding excessive conservatism. Under transient variation, it suppresses false handovers caused by short peaks and prevents  $A \rightarrow B \rightarrow A$  ping-pong. RS-TOPSIS reduces the ranking advantage of volatile candidates, determining which network to switch to, while ADH raises the trigger threshold during fluctuations, determining when to switch. Together, they preserve necessary handovers, reduce false handovers, and limit associated link-reestablishment overhead.

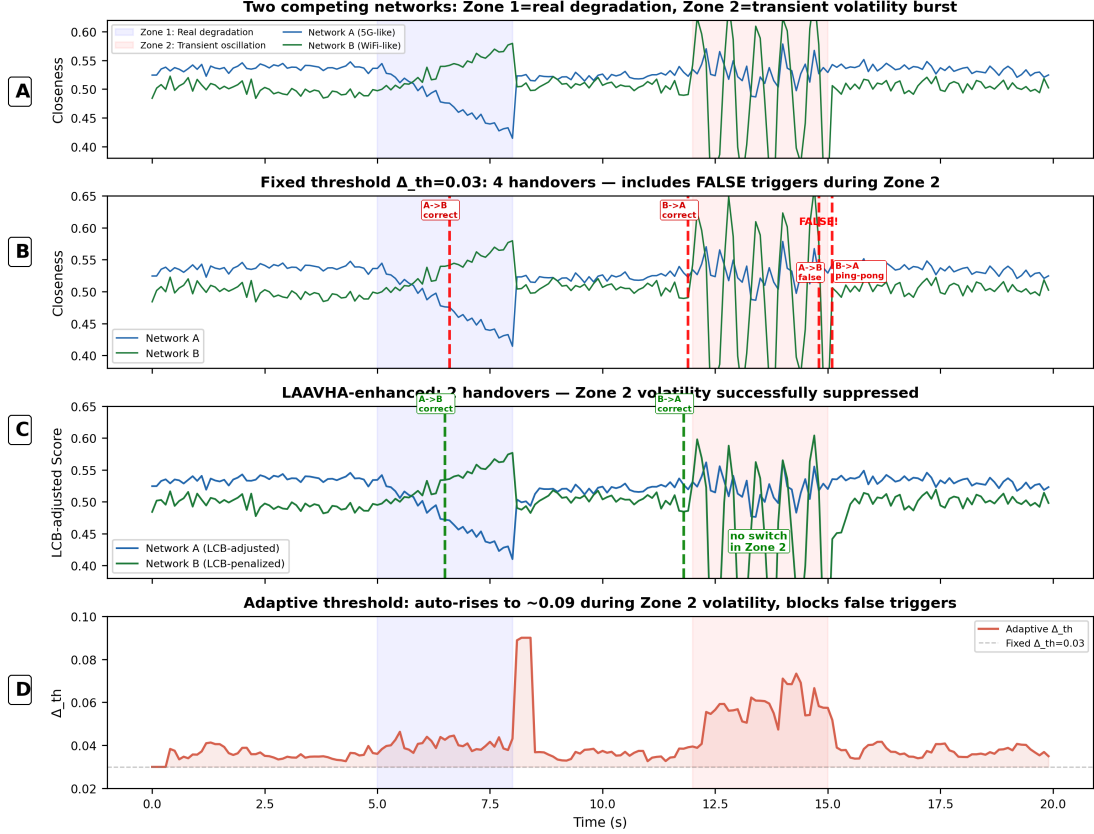

**Figure 7.** Adaptive-hysteresis validation of fixed low threshold ( $\Delta_{th} = 0.03$ ) and ALERA under sustained degradation and transient fluctuation.

## 4 Conclusion

For VHO challenges arising from wide-area flight, heterogeneous coverage, and rapid link-state changes in UAV remote sensing, this paper proposes LAAVHA and its enhanced version, ALERA. LAAVHA integrates stacked-LSTM short-term state prediction, attention-based dynamic attribute weighting, improved TOPSIS using current and predicted states, and dual-hysteresis decision-making. This joint use of temporal evolution, flight state, and multi-attribute service requirements reduces handovers caused by transient boundary fluctuations. Without altering the LSTM-attention architecture or training parameters, ALERA adds ADH to adapt the handover threshold and confirmation window to serving-network SINR variation and flight speed, and RS-TOPSIS to penalize historical closeness variation. Therefore, it improves adaptation through both “when to switch” and “which network to switch to.” Across 50 random seeds, LAAVHA achieves the lowest mean handover count among 11 algorithms (0.24), reducing handovers by 84.8% – 99.1% versus eight baselines, with 38 of 50 runs requiring none. Removing LSTM prediction or dynamic attention weighting increases the mean to 1.08 and 2.00, respectively. ALERA completes

all necessary handovers under sustained degradation and produces zero false handovers under transient variation, demonstrating reliable and stable data transmission for UAV remote-sensing missions.

## References

- [1] YANG K, WANG Y, GAO X, et al. Communications in space-air-ground integrated networks: an overview[J]. *Space: Science & Technology*, 2025, 5: 0199.
- [2] GERACI G, GARCÍA-RODRÍGUEZ A, AZARI M M, et al. What will the future of UAV cellular communications be? A flight from 5G to 6G[J]. *IEEE Communications Surveys & Tutorials*, 2022, 24(3): 1304–1335.
- [3] RIBEIRO L M B, MÜLLER I, BECKER L B. Communication interface manager for improving performance of heterogeneous UAV networks[J]. *Sensors*, 2021, 21(13): 4255.
- [4] AYASS T, COQUEIRO T, CARVALHO T, et al. Unmanned aerial vehicle with handover management fuzzy system for 5G networks: challenges and perspectives[J]. *Intelligence & Robotics*, 2022, 2(1): 20–36.
- [5] REHMAN A U, ROSLEE M B, TIANG J J. A survey of handover management in mobile HetNets: current challenges and future directions[J]. *Applied Sciences*, 2023, 13(5): 3367.
- [6] HAGHRAH A, ABDOLLAHI M P, AZARHAVA H, et al. A survey on the handover management in 5G-NR cellular networks: aspects, approaches and challenges[J]. *EURASIP Journal on Wireless Communications and Networking*, 2023, 2023(1): 52.
- [7] WANG Z, LV Z, XU X, et al. Vertical switching algorithm for unmanned aerial vehicle in power grid heterogeneous communication networks[J]. *Electronics*, 2024, 13(13): 2612.
- [8] ZHONG J, ZHANG L, ALHABO M, et al. A hybrid scheme using TOPSIS and Q-learning for handover decision making in UAV-assisted heterogeneous network[J]. *IEEE Access*, 2024, 12: 31422–31430.
- [9] GOH M I, MBULWA A I, YEW H T, et al. Handover decision-making algorithm for 5G heterogeneous networks[J]. *Electronics*, 2023, 12(11): 2384.
- [10] HWANG C L, YOON K. Multiple attribute decision making: methods and applications. A state-of-the-art survey[M]. Berlin: Springer-Verlag, 1981.
- [11] ZOLFANI S, YAZDANI M, PAMUCAR D, et al. A VIKOR and TOPSIS focused reanalysis of the MADM methods based on logarithmic normalization[J]. *Facta Universitatis, Series: Mechanical Engineering*, 2020, 18(3): 341–355.
- [12] DANTAS SILVA F S, LIMA M P S, CORUJO D, et al. A comprehensive step-wise survey of multiple attribute decision-making mobility approaches[J]. *IEEE Access*, 2024, 12: 108616–108656.
- [13] SATAPATHY P, MAHAPATRO J. An efficient multicriteria-based vertical handover decision-making algorithm for heterogeneous networks[J]. *Transactions on Emerging Telecommunications Technologies*, 2022, 33(4): e4409.
- [14] ZHONG Y, WANG H, LV H, et al. A vertical handoff decision scheme using subjective-objective weighting and grey relational analysis in cognitive heterogeneous networks[J]. *Ad Hoc Networks*, 2022, 134: 102924.
- [15] RIAZ H, ÖZTÜRK S, ALDIRMAZ ÇOLAK S, et al. Performance analysis of weighting methods for handover decision in HetNets[J]. *Gazi University Journal of Science*, 2024, 37(4): 1791–1810.

- [16] TAN K, BREMNER D, LE KERNEC J, et al. Intelligent handover algorithm for vehicle-to-network communications with double-deep Q-learning[J]. *IEEE Transactions on Vehicular Technology*, 2022, 71(7): 7848–7862.
- [17] JANG Y, RAZA S M, KIM M, et al. Proactive handover decision for UAVs with deep reinforcement learning[J]. *Sensors*, 2022, 22(3): 1200.
- [18] ZAID M, KADIR M K A, SHAYEA I, et al. Machine learning-based approaches for handover decision of cellular-connected drones in future networks: a comprehensive review[J]. *Engineering Science and Technology, an International Journal*, 2024, 55: 101732.
- [19] HOCHREITER S, SCHMIDHUBER J. Long short-term memory[J]. *Neural Computation*, 1997, 9(8): 1735–1780.
- [20] KAUR G, GOYAL R K, MEHTA R. An efficient handover mechanism for 5G networks using hybridization of LSTM and SVM[J]. *Multimedia Tools and Applications*, 2022, 81(26): 37057–37085.
- [21] ALRAIH S, NORDIN R, ABU-SAMAH A, et al. A survey on handover optimization in beyond 5G mobile networks: challenges and solutions[J]. *IEEE Access*, 2023, 11: 59317–59345.
- [22] FAN D, ZHOU S, LUO J, et al. Joint traffic prediction and handover design for LEO satellite networks with LSTM and attention-enhanced rainbow DQN[J]. *Electronics*, 2025, 14(15): 3040.
- [23] ZHOU S, LIU X, TANG B, et al. Handover and coverage analysis in 3-D mobile UAV cellular networks[J]. *IEEE Internet of Things Journal*, 2024, 11(18): 29911–29925.
- [24] TASHAN W, SHAYEA I, ALDIRMAZ-COLAK S, et al. Voronoi-based handover self-optimization technique for handover ping-pong reduction in 5G networks[C]//2023 10th International Conference on Wireless Networks and Mobile Communications (WINCOM). Piscataway: IEEE Press, 2023: 1–6.
- [25] NDEGWA S, NYACHIONJEKA K, MHARAKURWA E T. User preference-based heterogeneous network management system for vertical handover[J]. *Journal of Electrical and Computer Engineering*, 2023: 1–20.
- [26] SOYDANER D. Attention mechanism in neural networks: where it comes and where it goes[J]. *Neural Computing and Applications*, 2022, 34(16): 13371–13385.
- [27] VASWANI A, SHAZEER N, PARMAR N, et al. Attention is all you need[C]//Advances in Neural Information Processing Systems 30. Red Hook: Curran Associates, 2017: 5998–6008.
- [28] HWANG W S, CHENG T Y, WU Y J, et al. Adaptive handover decision using fuzzy logic for 5G ultra-dense networks[J]. *Electronics*, 2022, 11(20): 3278.
- [29] GANNAPATHY V R, NORDIN R, ABU-SAMAH A, et al. An adaptive TTT handover (ATH) mechanism for dual connectivity (5G mmWave–LTE advanced) during unpredictable wireless channel behavior[J]. *Sensors*, 2023, 23(9): 4357.
- [30] KARMAKAR R, KADDOUM G, CHATTOPADHYAY S. Mobility management in 5G and beyond: a novel smart handover with adaptive time-to-trigger and hysteresis margin[J]. *IEEE Transactions on Mobile Computing*, 2023, 22(10): 5995–6010.
- [31] EZZ-ELDIEN N A, ABDEL-ATTY H M, ABDALLA M I, et al. An adaptive optimized handover decision model for heterogeneous networks[J]. *PLOS ONE*, 2023, 18(11): e0294411.
- [32] MANZOOR S, MANZOOR M, MANZOOR H, et al. Which simulator to choose for next generation wireless network simulations? ns-3 or OMNeT++[J]. *Engineering Proceedings*, 2023, 46(1): 36.

- [33] YIN H, LIU P, LIU K, et al. ns3-ai: fostering artificial intelligence algorithms for networking research[C]//Proceedings of the 2020 Workshop on ns-3. New York: ACM, 2020: 57–64.
- [34] RAPPAPORT T S. Wireless communications: principles and practice[M]. 2nd ed. Upper Saddle River: Prentice Hall, 2002.