苏州爱普拉斯微电子有限公司
SUZHOU A_PLUS MICRO- ELECTRONICS CO., LTD.

规 格 书

SPECIFICATION

CUSTOMER：

客户：WSA

PART. NO.

客 户 编 号：21012768

CUSTOMER PART. NAME.

客 户 品 名：SMD t-coil

INFORMATION PREPARED BY：

内 容 提 供：Stephen

DATE：

日　　期：2022.09.16

SUPPLIER：

供应商：A-Plus Micro-Electronics Co.,Ltd

PART.NO.

供应商编号：

SUPPLIER NAME：

供应商名称：

Document Version：

文件版本：C

供应商名称（Supplier Name）
苏州爱普拉斯微电子有限公司
SuZhou A-Plus Micro-Electronics Co.,Ltd.

	签名（Signature） Name
拟制 Prepared	Stephen. Yu Stephen. Yu 2023.01.03
批准 Approved	Heaton. Zhang Heaton. Zhang 2023.01.03

公司名称：苏州爱普拉斯微电子有限公司
CORPORATE NAME： SUZHOU A_PLUS MICRO- ELECTRONICS CO., LTD.
地址：中国江苏省苏州市高新区火炬路 57 号 35 幢
ADDRESS: No.35, Building, No.57, Huoju Road , Jiangsu, China
电话（TEL）:86-0512-66623793
邮编：（POST CODE）：215011
E-mail: Stephen.yu@a-pluschina.com

苏州爱普拉斯微电子有限公司
SUZHOU A_PLUS MICRO- ELECTRONICS CO., LTD.

目　录
（CONTENTS）

Page　名称（Name）

1、　Cover-封面

2、　Contents-目录

3、　Electrical Characteristics -电气特性

4、　Component Drawing -产品图纸

5、　Core Drawing-磁芯图纸

6、　Packaging Specifications -包装规范

7~8、　Coating Material -涂覆材料

21012768

Electrical Characteristics

(Temperature /RH= 25°C / 30% relative humidity. unless otherwise specified)

Inductance

Inductance at 1.0k Hz	410mh
Inductance tolerance over temperature (0° C to +40° C) without initial tolerance	±15%

DC – Widerstand

DC – Resistance	4. 6kΩ ±15%


Testing Conditions


Temperature range	0° C ... +40° C
Testing voltage	1V
Testing frequency	1.0k Hz

SRF >60kHz

Sensitivity -62.5±2dbv

21012768 (Drawing**)**

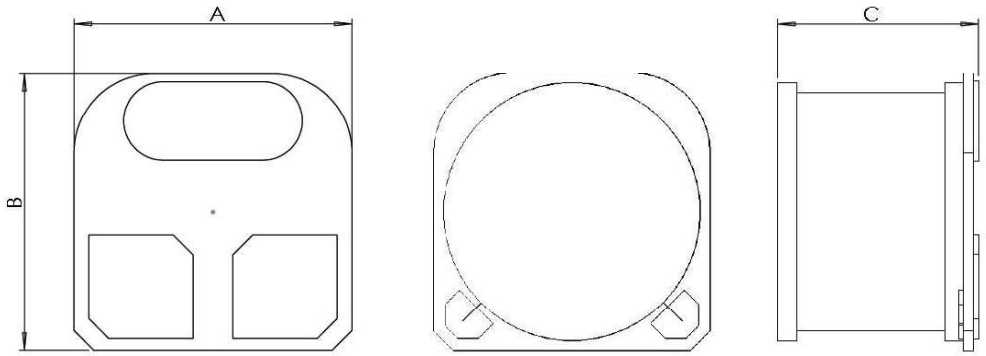

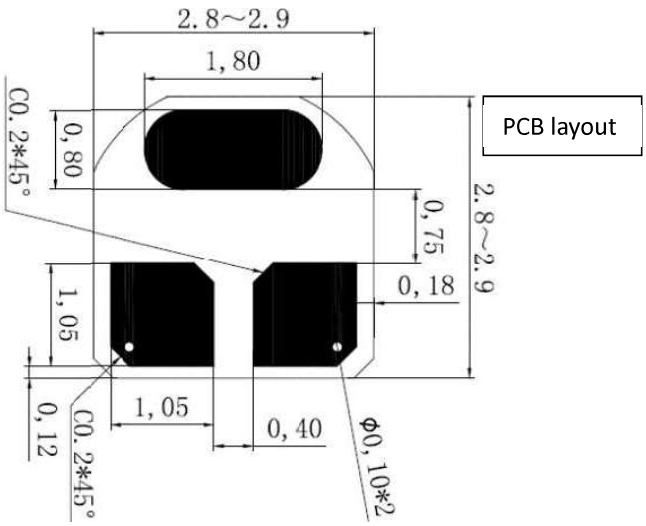


PCB layout

Plating information:
copper thickness>=20um, Ni>=3um, Au>=0.05um



1.Test Conditions:	
Test Frequency	1.0K Hz
Test Voltage	1V
Temperature range	Room Temperature reference 25° C
2.Dimensions:	
A	2.9mm Max
B	2.9mm Max
C	2.1mm Max（do not including soldering pad height）
3.Winding	
Number of turns	6400T ref
Wire diameter	0.0125mm Class 180

21012768 (Core)

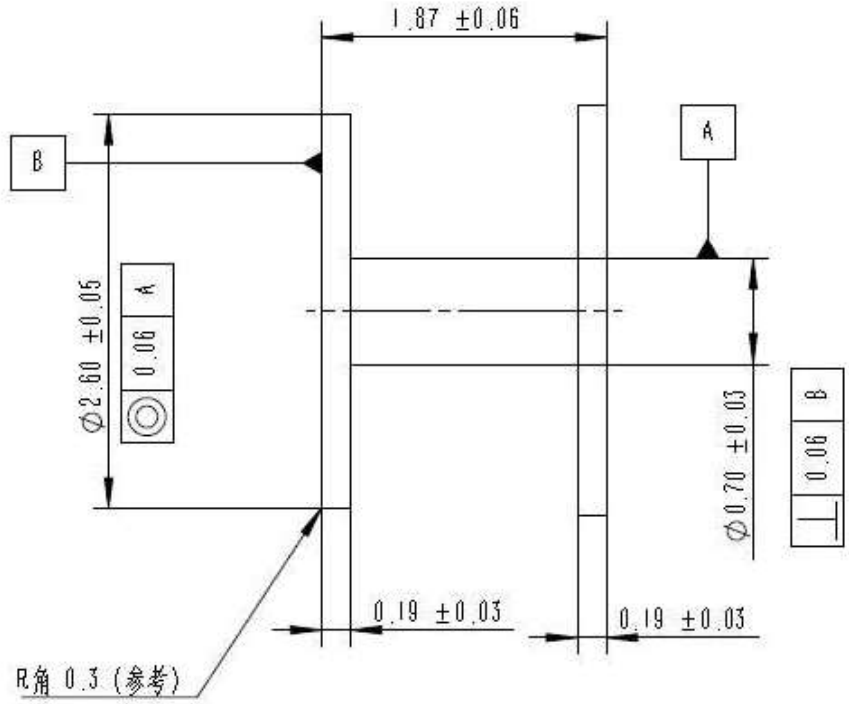

Unit: mm

1.Material

Material type	Permalloy 1J85 with P-coating

2.Dimensions:

Flange diameter	Φ2.6±0.05mm
Flange thickness	0.19±0.03 mm
Total core height	1.87±0.06mm
Core center pillar diameter	Φ0.70±0.03 mm

3.Storage

Storage temperature	-20° C ... +85° C

4.RoHS

RoHS Compliance

苏州爱普拉斯微电子有限公司
SUZHOU A_PLUS MICRO- ELECTRONICS CO., LTD.

21012768 (Packaging)

1.Packing Way：

Carrier tape and reel

2.Quantity：

2500pcs each reel

3.Drawing：



21012768 (Coating Material)

1.Component:

2360T

2.Specification:

PRODUCT DESCRIPTION

Radhow 2360B provides the following product characteristics:

Chemical type	Modified epoxy resin
Appearance	Light yellow transparent liquid
Components	Single component
Viscosity	Low
Curing condition	UV or Heat
Application	Encapsulating or bonding

Radhow 2360T is a low viscosity single liquid modified epoxy resin adhesive. It has good storage stability at room temperature and excellent coating performance. It can be cured by heating or ultraviolet (UV). Especially for products in areas where light cannot reach, the convenience of construction operation can be realized by rapid curing under light first, and then heating and curing. The cured product has good moisture and heat resistance, high temperature resistance, low thermal expansion rate and excellent adhesion to metal, glass and ceramics. It is especially suitable for surface coating or bonding of wound electronic products.

TYPICAL UNCURED PROPERTIES

Viscosity cps @25℃, mPa·s	2000-3500
Flash point (TCC), ℃	>100
Density@ 25℃, g/ml	1.23

Curing Performance

***Heating**

130℃*40min or 150℃*30min

The curing speed depends on the curing temperature

*** Ultraviolet (UV)**

Radhow Radhow 2360B can be cured by irradiation with ultraviolet light of 365nm. To obtain a full cure on surfaces exposed to air, radiation at 220 to 260 nm is required. The cure rate and ultimate depth of cure will depend on light intensity, the spectral distribution of the light source, the exposure time and the light transmittance of the substrates. The recommended curing energy is not less than 3000 mJ /cm².

CURING PERFORMANCE

Hardness, ISO 868, Shore D	60-70
Tensile shear strength (steel/glass, GB1040-2008), MPa	≥30
Coefficient of thermal expansion, ISO 11359-2, ppm·K⁻¹	110
Dielectric strength, kV/mm	23
Volume resistivity, IEC 60093, Ω·cm	1.7×10^{15}
Surface resistivity	22×10^{15}

THERMAL PERFORMANCE

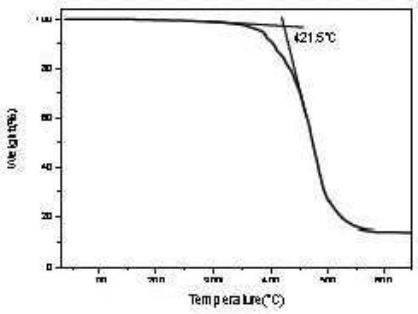


Fig. TGA

NOTES

1) Pls keep the base materials dry, clean and without scratches nor defects before using the adhesives to avoid any bad influence tc the adhesion performance.
2) No mixing and stirring to avoid the formation of bubbles.
3) The components after sizing shall be directly cured in an oven at 130 ℃. When the temperature is too low, it will cause adhesive flow and hand adhesion or poor curing. When the temperature is too high, it will cause explosive polymerization, make the cured product brittle and affect the product performance
4) he remaining glue cannot be directly poured into the packaging bottle to avoid hidden dangers to the quality of the remaining glue. The unused glue can be directly sealed and used within 72 hours.

5) When thawing, it shall be closed to prevent the invasion of water vapor.

STORAGE

The original package shall be sealed and stored in a cool and dry place below -5 ℃, and the validity period is 3 months

STATEMENT

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof.