


Week 06: NET512 practical

Selinah Kgwahla

2026/09/04


➤ TOPOLOGY SETUP:

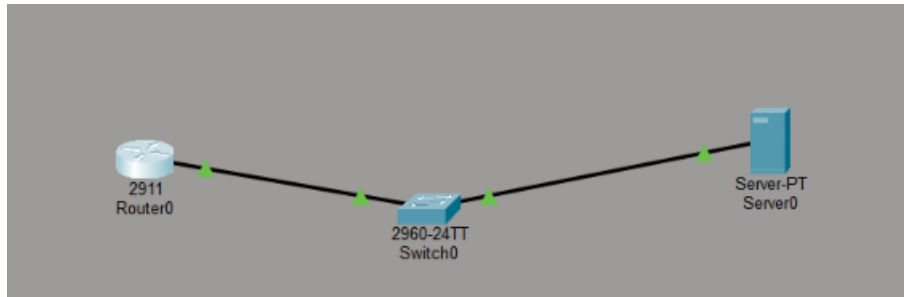

➤ Switch, Router and Server configurations:

```
Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname R1
R1(config)#ip address 10.10.10.1 255.255.255.0
R1(config)#^
% Invalid input detected at '^' marker.
R1(config)#int g0/0
R1(config-if)#ip address 10.10.10.1 255.255.255.0
R1(config-if)#no shutdown
```

```
Switch>en
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#hostname SW1
SW1(config)#int vlan 1
SW1(config-if)#ip address 10.10.10.2 255.255.255.0
SW1(config-if)#no shutdown
```

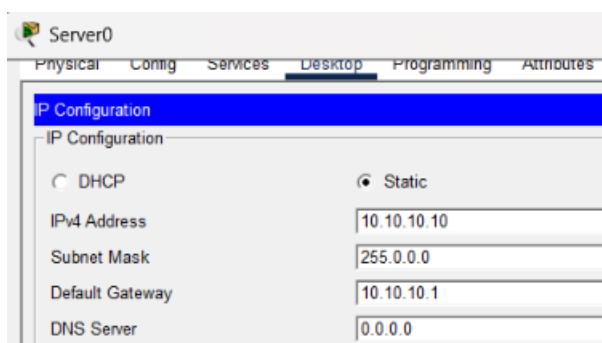

➤ Successful connection and ping from the Router:

```
R1#ping 10.10.10.10
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.10.10.10, timeout is 2 seconds:
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/0/0 ms
```

- ```
R1#
R1#copy running-config tftp
Address or name of remote host []? 10.10.10.10
Destination filename [R1-config]? config-backup.cfg

Writing running-config...!!
[OK - 701 bytes]

701 bytes copied in 0.022 secs (31863 bytes/sec)
R1#
```

[illegible]

```
R1#copy flash: tftp:
Source filename []? c2900-universalk9-mz.SPA.151-4.M4.bin
Address or name of remote host []? 10.10.10.10
Destination filename [c2900-universalk9-mz.SPA.151-4.M4.bin]? R1- config-backup.cfg

Writing c2900-universalk9-
mz.SPA.151-4.M4.bin...!!
!!
!!
!!
!!
!!
!!
!!
!!
!!
!!
!!
!!
!!
!!
[OK - 33591768 bytes]

33591768 bytes copied in 1.625 secs (2170459 bytes/sec)
R1#copy running-config tftp:
Address or name of remote host []? 10.10.10.10
Destination filename [R1-config]? R1- running-config.cfg

Writing running-config...!!!
[OK - 701 bytes]

701 bytes copied in 0 secs
R1#
```

## ➤ Task 49:

```
R1>en
R1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#enable secret cisco123
R1(config)#line console 0
R1(config-line)#password consolepass
R1(config-line)#login
R1(config-line)#exit
R1(config)#exit
R1#
%SYS-5-CONFIG_I: Configured from console by console

R1#copy running-config startup-config
Destination filename [startup-config]? reload
%Error copying nvram:reload (Invalid argument)
R1#copy running-config startup-config
Destination filename [startup-config]?
Building configuration...
[OK]
R1#
```

```
monitor: command "boot" aborted due to user interrupt
rommon 1 > confreg 0x2142
rommon 2 > reset
System Bootstrap, Version 15.1(4)M4, RELEASE SOFTWARE (fc1)
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 2010 by Cisco Systems, Inc.
Total memory size = 512 MB - On-board = 512 MB, DIMM0 = 0 MB
CISCO2911/K9 platform with 524288 Kbytes of main memory
Main memory is configured to 72/-1(On-board/DIMM0) bit mode with ECC disable:

Readonly ROMMON initialized
```

## ➤ Task 50:

```
SW1>en
SW1#
SW1#erase startup-config
^
% Invalid input detected at '^' marker.

SW1#erase startup-config
Erasing the nvram filesystem will remove all configuration files! Continue? [confi
[OK]
Erase of nvram: complete
%SYS-7-NV_BLOCK_INIT: Initialized the geometry of nvram
SW1#show ip int brief
Interface IP-Address OK? Method Status Protocol
FastEthernet0/1 unassigned YES manual down down
FastEthernet0/2 unassigned YES manual up up
FastEthernet0/3 unassigned YES manual down down
FastEthernet0/4 unassigned YES manual down down
FastEthernet0/5 unassigned YES manual down down
FastEthernet0/6 unassigned YES manual down down
FastEthernet0/7 unassigned YES manual down down
FastEthernet0/8 unassigned YES manual down down
FastEthernet0/9 unassigned YES manual down down

Vlan1 unassigned 128 unset administratively down down
R1#erase startup-config
Erasing the nvram filesystem will remove all configuration files! Continue? [confi
[OK]
Erase of nvram: complete
%SYS-7-NV_BLOCK_INIT: Initialized the geometry of nvram
R1#show ip int brief
Interface IP-Address OK? Method Status Protocol
GigabitEthernet0/0 10.10.10.1 YES manual administratively down down
GigabitEthernet0/1 unassigned YES unset administratively down down
GigabitEthernet0/2 unassigned YES unset administratively down down
Vlan1 unassigned YES unset administratively down down
R1#
```

## ➤ TASK 51:

```
R1#copy tftp:
% Incomplete command.
R1#copy tftp: running-config
Address or name of remote host []? 10.10.10.10
Source filename []? R1-config-backup.cfg
Destination filename [running-config]?

Accessing tftp://10.10.10.10/R1-config-backup.cfg...
%Error opening tftp://10.10.10.10/R1-config-backup.cfg (No such file or directory)
R1#copy tftp: running-config
Address or name of remote host []? 10.10.10.10
Source filename []? R1- running-config.cfg
Destination filename [running-config]?

Accessing tftp://10.10.10.10/R1- running-config.cfg...
Loading R1- running-config.cfg from 10.10.10.10: !
[OK - 701 bytes]

701 bytes copied in 0.047 secs (14914 bytes/sec)
R1#
%SYS-5-CONFIG_I: Configured from console by console

R1#copy tftp: flash:
Address or name of remote host []? R1- config-backup.cfg
Source filename []?
?File name not specified
%Error parsing filename (Unknown error 0)

R1#copy tftp: flash:
Address or name of remote host []? 10.10.10.10
Source filename []? R1- config-backup.cfg
Destination filename [R1- config-backup.cfg]?

Accessing tftp://10.10.10.10/R1- config-backup.cfg...
Loading R1- config-backup.cfg from 10.10.10.10:
!!
!!
!!
!!
[OK - 33591768 bytes]

33591768 bytes copied in 1.564 secs (2255113 bytes/sec)
R1#
```

## ➤ Successful ping

```
R1#ping 10.10.10.10

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.10.10.10, timeout is 2 seconds:
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/0/1 ms
```